**Light Commercial** 

Catalogue



### DAIKIN

### DAIKIN AIRCONDITIONING INDIA PVT. LTD.

12th Floor, Building No. 9, Tower A, DLF Cyber City DLF Phase III, Gurgaon 122002, Haryana, India Tel: 0124-4555444, Fax: 0124-4555333.

### Sales & Service Offices:

Ahmedabad Tel: 079-40013100

Bengaluru Tel: 080-25722336/25722337

Bhubaneswar Tel: 0674-2554677/76

Chandigarh Tel: 0172-4947200/30

Chennai Tel: 044-40807676

Cochin Tel: 0484-2331615

Coimbatore Tel: 7540093364 Delhi

Tel: 011-43834400/5500

Ghaziabad Tel: 0120-4205851

Guwahati Tel: 9147165421

Hyderabad Tel: 040-49134283

Indore

Tel: 0731-4005864

Tel: 0141-221890<u>5/906</u>

Jammu

Tel: 8194990333

Karnal

Tel: 01844006855

Kolkata

Tel: 033-40608019/40659544

Lucknow

Tel: 0522-4309858/59/60

Ludhiana

Tel: 0161-5011122

Mumbai

Tel: 022-62321666

Tel: 8083222131/9147310520

Pune

Tel: 020-47248158

Raipur

Tel: 0771-4911225

Ranchi

Tel: 7008704566

Raikot

Tel: 0281-2995059

Surat

Tel: 0261-4404365

Vijayawada Tel: 0866-295222624

Visakhapatnam Tel: 8008304466

**Customer Contact Centre:** 

Say "Hi" at 987 140 9300

Customer Support no.: 1860 180 3900/011-40319300

Email: customerservice@daikinindia.com Visit us at: www.daikinindia.com

Follow us on:

www.facebook.com/daikinindia

X www.twitter.com/daikinindia

www.instagram.com/daikinindia

in in.company/daikin-airconditioning-india-pvt.-ltd.

www.youtube.com/user/DaikinACIndia

As a continuing policy of product innovation at Daikin, the design and specifications are subject to change without prior notice. The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.

'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of





What Daikin Stands for	03
Daikin's Journey (Timeline)	04
Global Cooling Prize	05
Global Footprint	06
Taking Control of the Future with Inverter Technology	08












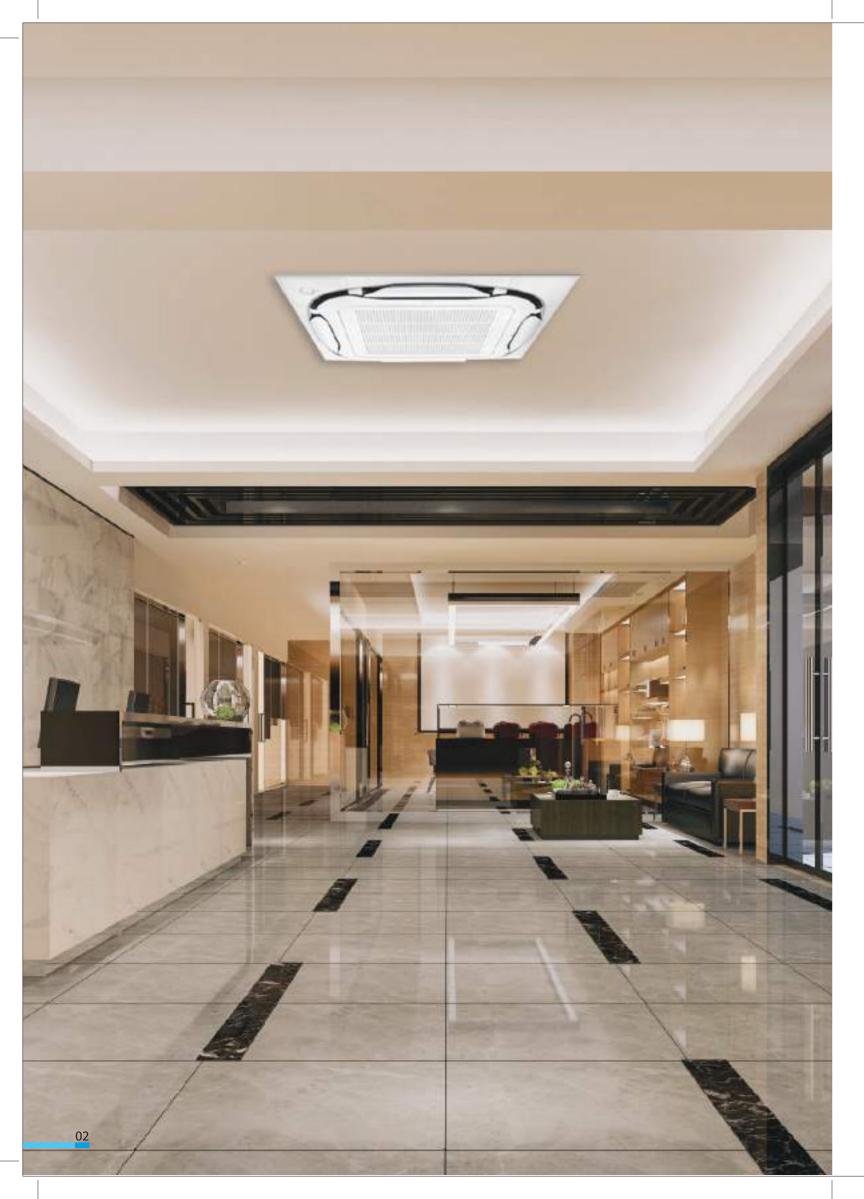



### What Daikin stands for

Daikin is a leading innovator and provider of advanced, high-quality air-conditioning solutions for residential, commercial and industrial applications. As World's Leading Air-Conditioning Company, Daikin is committed to delivering air-conditioning solutions that enhance the quality of life all around the world.

A diverse multinational company, Daikin Industries Ltd., active in air-conditioning, chemicals and oil hydraulics, was established in 1924. With headquarters at Osaka, Japan, the Daikin family has over \*98,162 members, working across 100+ production units and a large customer base in over 170 countries worldwide. As the world's sole manufacturer that develops a long line of products, from refrigerants to air-conditioners, Daikin advocates comfortable living on the strength of advanced technologies.

Today, the world is a single global market, and Daikin continues to address new challenges, creating headways and achieving milestones.

### **Our timeline**

1924

Akira Yamada San establishes the Osaka Kinzoku Kogyosho Limited Partnership. 2000

Daikin enters the Indian market in a JV with Usha Shriram Group at 80:20 stakes respectively as Daikin Shriram Airconditioning. 2002

Daikin introduces VRV technology in India.

2008

Groundbreaking ceremony of Daikin India's manufacturing base at Neemrana, Rajasthan. 2007

Daikin India relocates HQ to Gurgaon and commences business of McQuay Chillers in India. 2004

Daikin India becomes a wholly owned subsidiary of Daikin Industries Ltd., Japan.

2009

Production commences at manufacturing plant in Neemrana, Rajasthan.

2010

Fresh round of ₹ 250 crore investment. Thus, taking it to a total of ₹ 743 crore.

2012

Production of High Wall Split air-conditioners with R-32 refrigerant commences.

2016

Research and development centre opens at Neemrana, Rajasthan. 2015

MoU signed with Rajasthan Govt. for ₹ 600 crore investment, ₹ 60 crore investment for Research and Development Centre.

2013

2022

Fresh round of ₹ 330 crore investment.

2017

Second production facility opens at Neemrana, Rajasthan.

2021

- 1. Daikin India acquires Citizen Industries.
- 2. Setup of 3rd manufacturing plant in Sri City (AP)

Winners of:

- Global Cooling Prize
- Good Design Award for single way cassette
- NECA Award

2024

- 2<sup>nd</sup> R&D centre at Neemrana, Rajasthan
- · DJIME begins hostel building construction
- DAIPL signs MoU for 30+ acres in Sri City for future growth

2023

- Inaugurated Sri City Factory manufacturing Room AC and Compressors
- Daikin India acquires Virgo Technologies boosting Applied Business including Control Solutions

# We Innovate because we care

WE ARE PROUD TO ANNOUNCE
THAT WE ARE THE WINNER OF THE
GLOBAL COOLING PRIZE (GCP)
TOGETHER WITH NIKKEN SEKKEI LTD.

The Global Cooling Prize is rallying a global coalition of leaders to solve the critical climate threat that comes from growing demand for residential air conditioning. It encourages harnessing the power of innovation to provide cooling solutions that enhance people's lives without contributing to runaway climate change.



We collaborated with Nikken Sekkei Ltd. to propose a new concept for room air conditioning. The innovation employs a technology that can achieve comfort and energy savings, concurrently ensuring a consistent room temperature and humidity by adequately controlling multiple indoor units in one room. Moreover, it utilises the vaporisation heat of water to further increase the energy efficiency of the equipment. The proposed equipment uses HFO-1234ze(E) refrigerant, which has a low Global Warming Potential (GWP).

### **KEY ATTRIBUTES OF THE SOLUTION**


Proposed low GWP refrigerant HFO1234ze with A2L rating Proprietary swing compressor technology used to enhance the performance efficiency Control technology with sensors for measurement of outdoor and indoor air conditions







The Global Cooling Prize that we have won is consistent with our 'Environmental Vision 2050', which provides a roadmap for us to reach carbon neutrality by 2050. In line with that vision, we are in a continuous search to reduce energy consumption and refrigerant impact. We continuously strive to examine energy efficiency technology with low GWP refrigerant alternatives to make the planet better and greener.

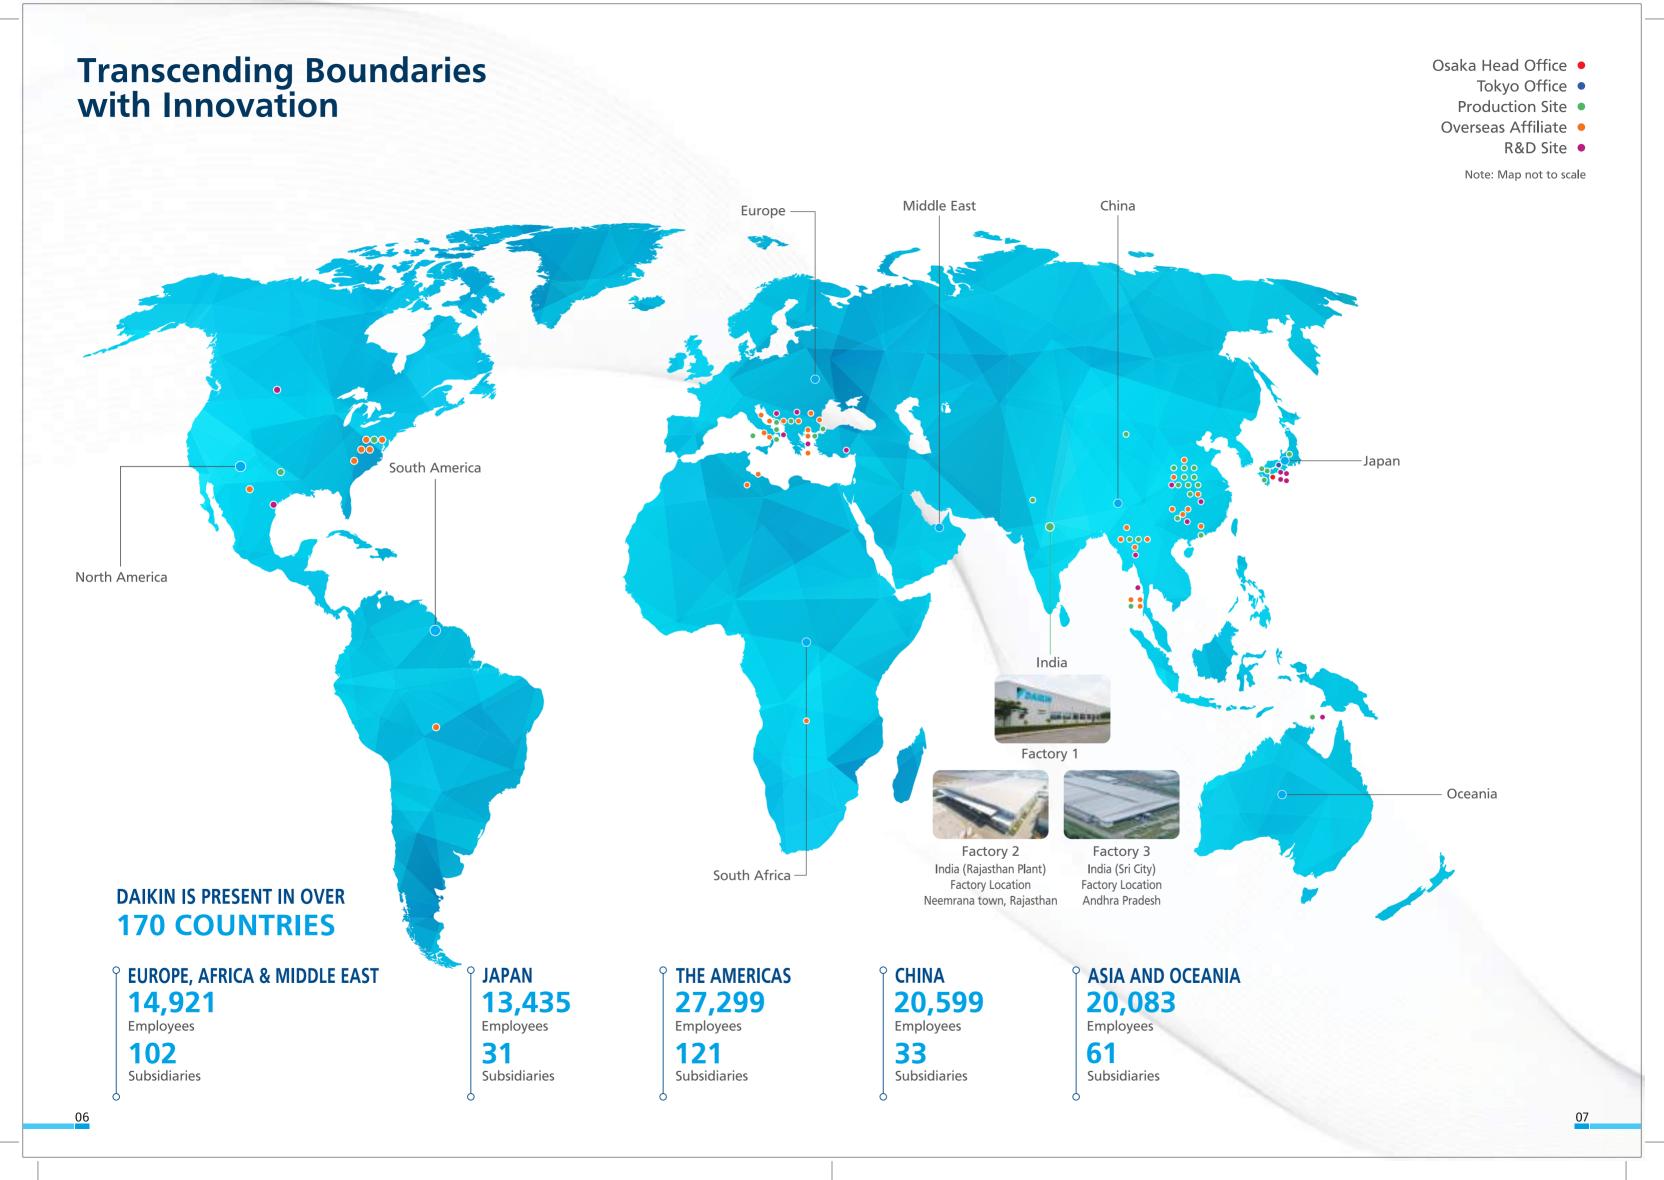

# Taking control of the future with Inverter Technology



### WHAT IS INVERTER TECHNOLOGY AND HOW IS IT DIFFERENT FROM NON-INVERTER TECHNOLOGY?

An inverter is a device for converting frequency. The technology is used in many home appliances and controls electric voltage, current and frequency. Inverter air-conditioners vary their cooling/heating capacity by adjusting the power supply frequency of their compressors.

### WHAT ARE THE BENEFITS OF INVERTER AIR-CONDITIONERS?



### Powerful

Inverter air-conditioners operate at maximum capacity as soon as they start up. As a result, the set temperature can be reached more quickly.



### **Energy saving**

After the indoor temperature approaches the set temperature, inverter control adjusts to low capacity operation to maintain this temperature. This makes inverter models more energy saving than non-inverter models, which must repeatedly start or stop their compressors to maintain the room temperature.



### Comfortable

Inverter air-conditioners finely adjust capacity according to changes in the air-conditioning load and the difference between the indoor temperature and set temperature is small. This gives higher comfort level than the non-inverter air-conditioners.



### WHAT MAKES DAIKIN'S INVERTER TECHNOLOGY UNIQUE?



### **Swing Compressor**

Daikin Air conditioners come with a Patented Swing Compressor which decreases friction and vibration. This helps in a smooth rotation of the Swing Compressor which provides a quiet and efficient operation. It saves electricity because of low pressure return during compression. The Swing Compressor also prevents leakage of refrigerant gas during compression. Quiet and efficient operation of the Swing Compressor due to low friction and vibration is better than conventional rotary compressor.



Daikin was presented 32<sup>nd</sup> Chairman's Award by the Japan society for the promotion of the machine industry for Swing Compressor.



### **DC** Inverter

Daikin calls an inverter model that is equipped with a DC motor as DC inverter. A DC motor offers higher efficiency than an AC motor. A DC motor uses the power of magnets to attract and repel to generate rotation. A DC motor that is equipped with powerful neodymium magnets, which enable even greater efficiency is called a reluctance DC motor.



Recipient of Electric Science Promotion Award (Reluctance DC motor for compressor)




### Reluctance DC motor for compressor

Daikin DC Inverter models are equipped with the reluctance DC motor for compressor. The reluctance DC motor uses two different types of torque, neodymium magnet and reluctance torque. This motor saves energy by generating more power with a smaller electric current than AC or conventional DC motors. Daikin's internally embedded neodymium magnet generates strong magnetic field and high torque resulting in high operational efficiency with less electricity consumption. It is more efficient at low frequencies most commonly used by air-conditioners improving efficiency by approximately 20%.



Neodymium magnets are used in the pink-coloured area.



Integral piston of blade and roller

The swing compressor can reduce operational vibration and sound because its piston moves smoothly inside the compressor.

# Efficiency of Reluctance DC motor 90 (%) 80 More than 20% 50 Rotational speed (rps) Reluctance DC motor Conventional DC motor Conventional DC motor Conventional DC motor High capacity

Neodymium magnets are approximately 10 times stronger than standard magnets. The use of neodymium magnets in Daikin compressors enhances their performance. Besides, it helps to improve the frequency range used by air-conditioners during periods of stable operation in which air-conditioners operate for the longest periods.

stronger than standard

ferrite magnet

# R-32 BEFRIENDING THE ENVIRONMENT

AIR IS SOMETHING THAT SURROUNDS US 24 HOURS A DAY. IN FACT, OUR EXISTENCE, AS WELL AS EARTH'S DEPENDS ON IT. AT DAIKIN, THE FUTURE OF THE WORLD'S AIR IS OUR GREATEST CONCERN. WE, THE MANUFACTURER OF WORLD'S BEST AIR-CONDITIONERS ARE ALWAYS PAVING THE PATH TO SAVE OUR ENVIRONMENT FOR NEXT GENERATION.

We phased out all R-22 model and shifted to the green refrigerant R-32. Now, whole world is coming together to find and work on way to address global warming issue. We are also offering worldwide free access to patents for equipment using next-generation refrigerant, R-32. Refrigerant choice is a key in saving the ozone layer and reducing global warming.

R-32 is Environment-Friendly

ZERO OZONE Depletion Potential

1/3rd
Global Warming Potential

**75%**less carbon-dioxide emissions

BETTER LIFE cycle climate performance

OUR RA MODELS MANUFACTURED IN INDIA USE THE NEXT GENERATION REFRIGERANT, R-32.

### R-32 offers Superior Performance


15.3% more cooling as compared to R410A

~30%
refrigerant charging volume as compared to R410A & R22


~5% more power savings compared to R410A

### Only 1/3rd Global Warming Potential


GWP



Charging Ratio (%)



Theoretical Modified GWP

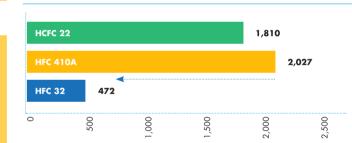

# PERFORMANCE at higher temperature as compared to R22 (Low Derating)

### Most balanced refrigerant

HFC32

HFC410A

HFO1234YF

Propane (HFC290)

Ozone

Ozone

Feconomy

Safety

Energy

efficiency

efficiency

efficiency

efficiency

efficiency

efficiency

efficiency

efficiency

efficiency

R-32 has zero Ozone Depletion Potential (ODP) and Modified Global Warming Potential (GWP) of 472, compared to R-410A's Modified GWP of 2,027. Also R-32 is a single component refrigerant, which makes it easy to recycle. It is because of these reasons that R-32 offers the lowest total emissions and best overall life-cycle climate performance.

### **Innovating for the Next**

### Engine of growth

### MANUFACTURING PLANT

Daikin's manufacturing plant at Neemrana, Rajasthan, aims to create products that will add comfort to the lives of people. It is supported by a network of production bases throughout the world and showcases the application of advanced technology and equipment. Our comprehensive quality control system features centrally computerised management of quality and production data to facilitate high-quality production within scheduled time.

Area\* **4,65,537** sq. mtrs.











\*Area includes Factory 1, Factory 2, Factory 3, ACDC Centre and Research & Development Centre

Disclaimer - Due to continuous expansion, numbers may differ. Visuals used are for representation purpose only.



Mechanical R&D Centre 2 - Neemrana, Rajasthan

Area 30,523 sq. mtrs.


### **RESEARCH & DEVELOPMENT FACILITY**

### 27+ Lab facilities

- · Psychometric lab
- Multi-chamber lab
- · Full Anechoic chamber for running sound test
- · Product Reliability test lab, CFM test lab and Psychrometric lab

### 9 Test facilities

- · Cyclic Corrosion test
- Salt Spray test
- · Thermal Shock test
- Vibration test
- Environmental test
- Drop test

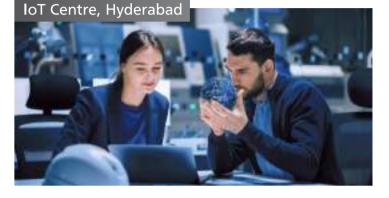

- Concept room
- Mock-up area
- Device test room (electronic parts test room)

Disclaimer - Due to continuous expansion, Numbers may differ. Visuals used are for representation purpose only.







### **Highest ISEER**

ISEER 5.20 RATING

### **ROLE**

Daikin's Integrated Power Module Printed Circuit
Board and Patented Swing Compressor Technology
are a unique engineering design where the PCB
(Controllers) is designed in such a way that it
optimizes the cooling effect & also result in higher
efficiency. Based on this engineering design we are
able to achieve higher ISEER of 5.20, which is
Higher than current 5 star ISEER requirements.



It saves power; ideal for long usage



It helps in saving more electricity

### **FUNCTIONALITY**

With Daikin's highest ISEER models, you get a product with a rating of 5.20\* ISEER, which is best in the 5 star category and is extremely energy efficient. As per BEE standard, the qualifying criteria for 5 star rating AC is of 5 ISEER. It ensures that you get the highest performance in the 5 star category.



More energy efficiency as compared to 5 star AC with ISEER 5



Cools even at 52°C

\*Model number FCMF50&FCMF71 with ISEER 5.20

### **Anti-Corrosion Treatment**



### ROLE

The Benzotriazole Oil prevents the heat exchanger from corrosion thus ensuring it lasts longer to deliver optimum cooling for long time. With this, the corrosion of copper is delayed by up to 2.8 times.

### **FUNCTIONALITY**

In Anti-Corrosion Treatment Function, a special coating of Benzotriazole oil is added to the copper coil to prevent corrosion. The treatment reduces the effect of nitric and acidic acid reaction on the copper coil of indoor & outdoor units. It is especially effective against the Indian climate conditions – rainy season, high humid area, coastal area and industrial smokes & pollutants areas.

### **BENEFIT**




Longer life of copper coil and air conditioners due to lowering corrosion impact



Durability of copper coil indoor & outdoor unit extends the lifetime of air conditioners by making the indoor & outdoor coil corrosion resistant

Available in selected models

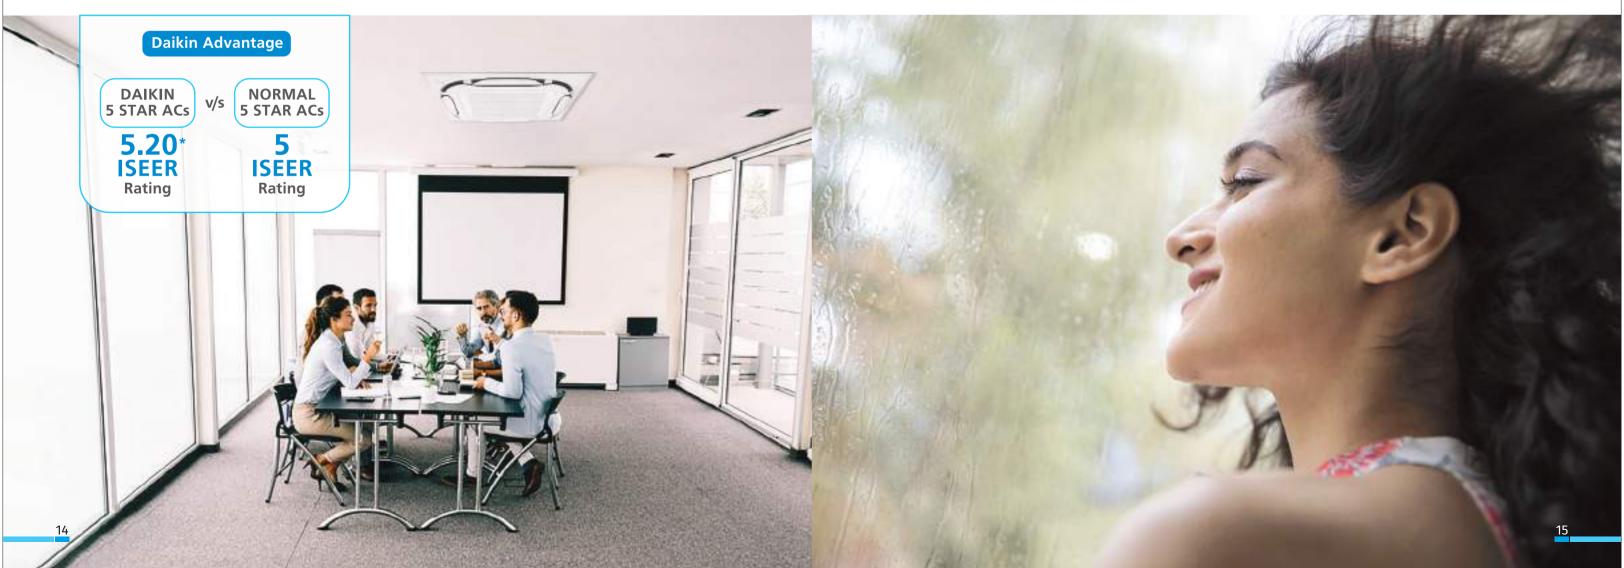

# Innovating to raise the standards and quality


The Department of Industrial Policy and Promotion (DIPP), Ministry of Commerce and Industry has mandated the Quality Control Order (QCO) for the AC & its related parts as per IS 1391 (Part 2): 2018.

### **BENEFITS FOR CUSTOMER**

The main aim of the QCO is to ensure best quality critical components, which is tested and approved by BIS and follow Indian Standards (IS) for local as well as imported parts related to air conditioners products which are under scope of Quality Control Order.

DAIKIN PRODUCTS ARE OF WORLD CLASS QUALITY



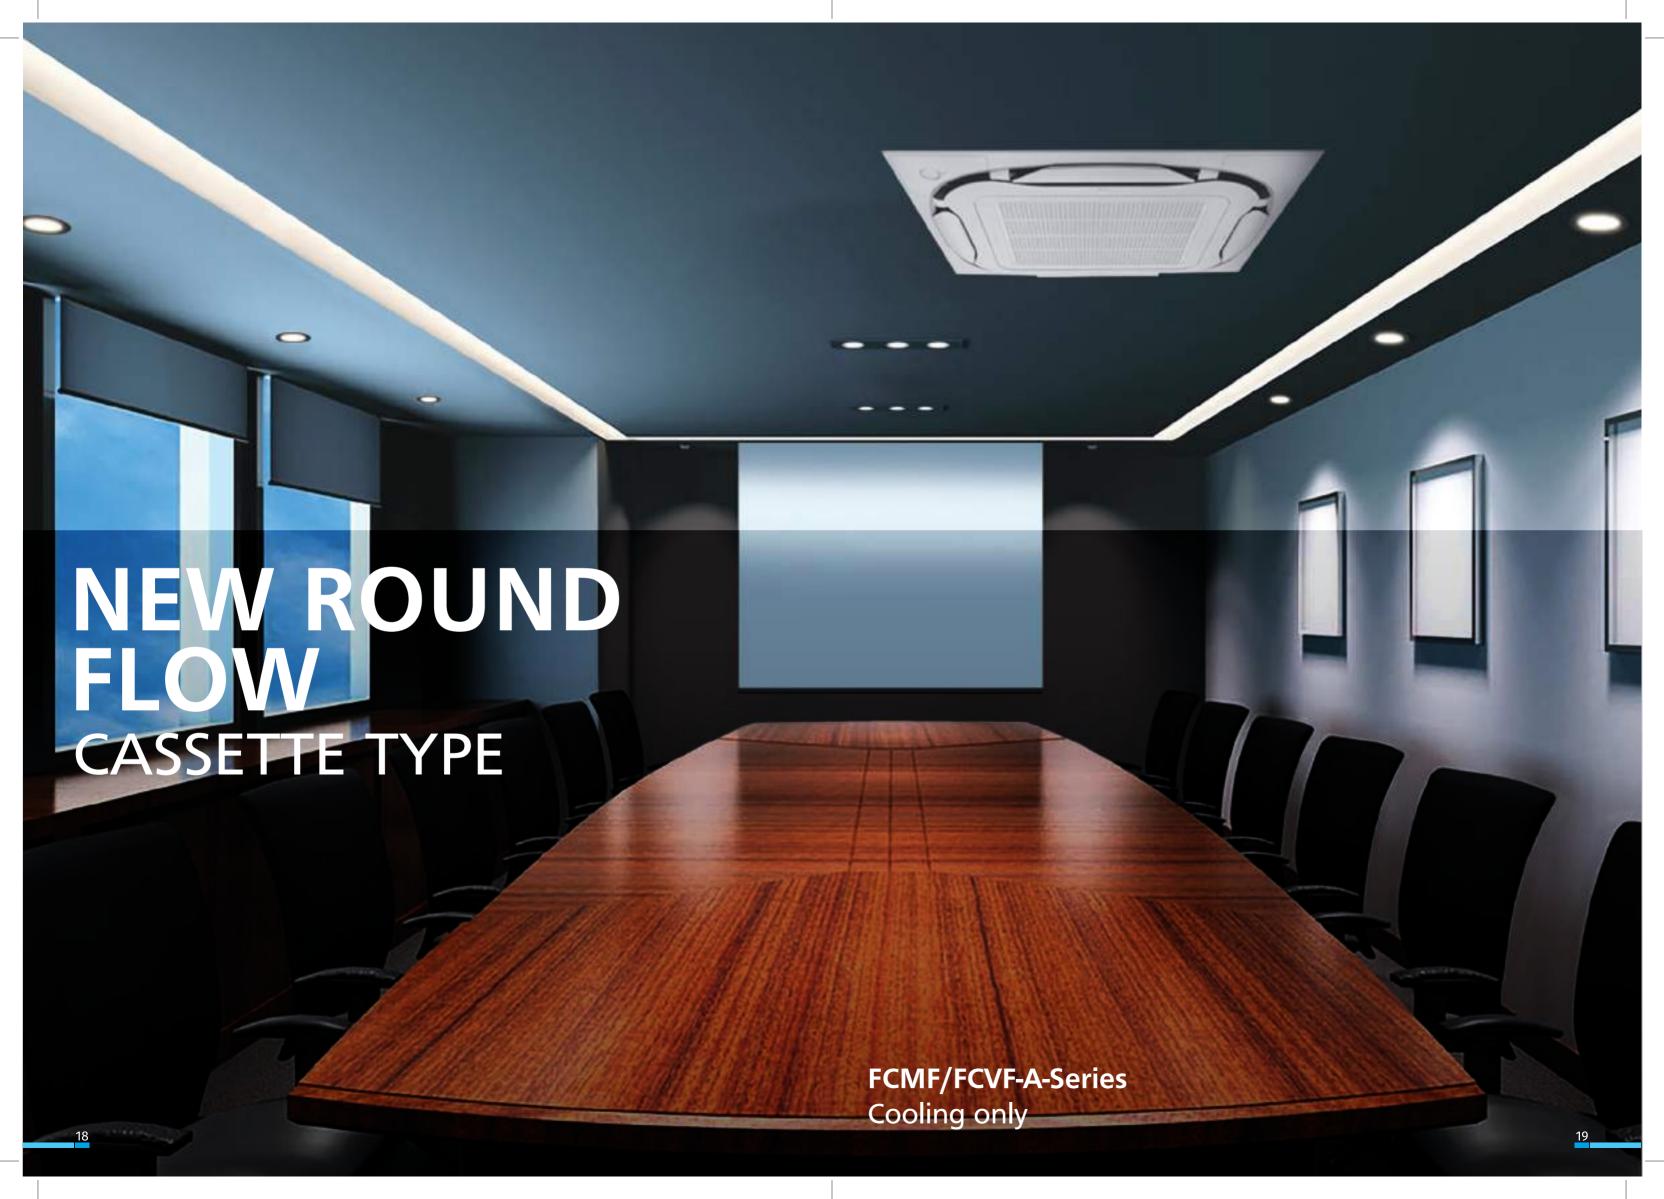

# FCMF/FCVF-A SERIES Cooling Only











Cassette air conditioner with 360° uniform airflow sets the standard

FCMF50/71/90/100/125/140 (5 star) with sensing FCVF-A50/71/90/100/125/140 (4 star) w/o sensing



INDIVIDUAL AIR











**NIGHT QUIET** 

D III NET

DRAIN PUMP

### Optional

### NAVIGATION REMOTE CONTROLLER (Wired Remote Controller)

BRC1E63 Note: Remote controller cable is not included and must be obtained locally. #For individual air flow direction control

WIRELESS LCD REMOTE CONTROLLER A signal receiver must be added to the indoor unit.



(Installed type) Wireless remote controller and signal receiver are sold as separate accessories.

Signal receiver unit




BRC7M632F-6

BRC91A152 (Wireless R/C)

### MADOKA (Stylish Remote Controller)

wired remote BRC1E63 is required.



BRC1H61W (White)



BRC1H61K (Black)

### **PANEL VARIATIONS**



Standard panel (Fresh white) BYCQ125EAF6



Standard panel with sensing (Fresh white) BYCQ125EEF6



Designer panel (Fresh white) BYCQ125EAPF









(Black) BYCQ125EAK


Standard panel with Sensing (Black) BYCQ125EEK

### **Panel compatibility:-**

FCVF-A series:








Auto grille panel

(Fresh white) BYCQ125EASF

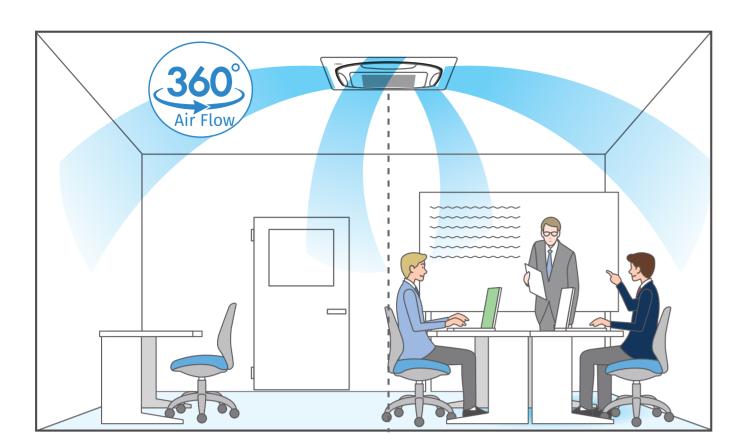

### **CIRCULATION AIRFLOW**

Cools the entire room to deliver comfort that never feels too cold or too warm. Cooling operation repeatedly performs the following at start.

2-way horizontal flow
4-way swing flow
2-way horizontal flow (direction changes)
4-way swing flow

### INDIVIDUAL AIRFLOW DIRECTION CONTROL

Airflow direction can be individually adjusted for each air discharge outlet to deliver optimal air distribution that conforms to conditions for airflow direction (small and large loads).


Selectable from position 0 to 4, swing, and no individual setting.



### 360° AIRFLOW

22


With uniform temperature distribution



Airflow distribution creates uniform comfort throughout the space.
Room remains comfortable even when set temperature is raised 1.

### SELECTABLE AIRFLOW PATTERN

Because air flows out from corner outlets, comfort spreads more widely.

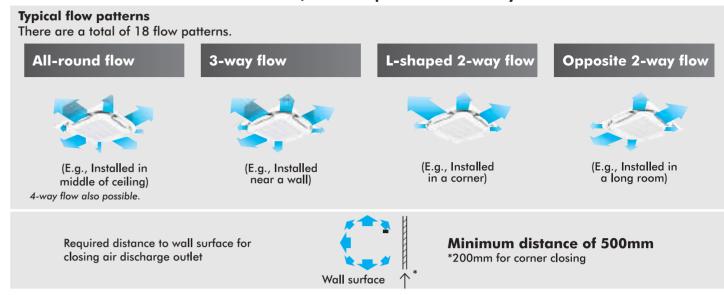


### Note

- Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing material (option)
  must be used to close each unused outlet.
- Operation sound increases when using 2-way or 3-way flow
- Designer panel cannot operate 2-way and 3-way flow.

### **DUAL SENSORS\*1**

### Dual sensors and individual airflow direction control automatically provide optimal control of airflow.

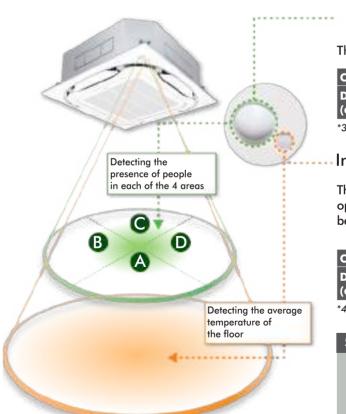

### Infrared presence sensor

The sensor detects the presence of people in each of the 4 areas.

Ceiling height	2.7m	2.7m	4.0m
Detection range (diameter)*3	Approx.8.5m	Approx.8.5m	Approx.13.5m


<sup>\*3.</sup> The infrared presence sensor detects 80cm above the floor.

### Infrared floor sensor

The sensor detects the floor temperature and automatically adjusts operation of the indoor unit to reduce the temperature difference between the ceiling and the floor.

Ceiling height	2.7m	2.7m	4.0m
Detection range (diameter)*4	Approx.11m	Approx.14m	Approx.16m

<sup>\*4.</sup> The infrared floor sensor detects at the floor surface.

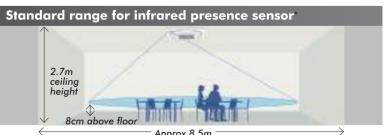


\*[Concerning infrared presence sensor]

- People are detected by large movements such as the motion of people walking at a certain distance away from sensor.
- Human detection is not possible for blind areas of sensor. [Concerning infrared floor sensor].
- The detected temperature may sometimes be affected by a heat source, window, or device emitting heat in the detection range.

### **AUTO AIRFLOW FUNCTION\*5**

### **Direct Airflow (default: OFF)**

### Cooling



Optimal air direction by "Auto"

With "Auto" airflow direction mode, flaps are controlled to deliver optimal airflow when the room is unoccupied.

\*5.Airflow direction should be set to "Auto".

# Dry When human presence is detected

Optimal air direction


Swing (narrow) by "Auto"

When presence is detected, air direction is set to "Swing (narrow)" to deliver cool air to users.

### COMFORT AND ENERGY SAVING PREVENTING OVERCOOLING\*6


\*6.Airflow direction and airflow rate should be set to "Auto".

### Floor temperature is detected and overcooling prevented.

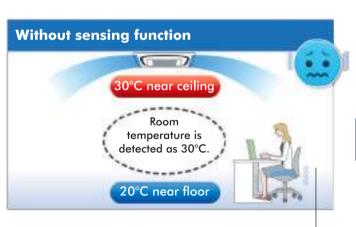

Area around feet gets too cold because the air conditioner continues until the temperature near the ceiling reaches the set temperature.

### Cooling



The floor temperature, which is lower than near the ceiling, is detected.

Automatic control using the temperature near the person as the room temperature.

### **Energy savings:**

The temperature near the person is automatically calculated by detecting the temperature of the floor. Energy is saved because the area around the feet does not get too cold.

### FCMF/FCVF-A SERIES (Contd.)

### SENSING SENSOR FUNCTIONS\*7,8,9


### Sensing sensor low mode (default: OFF) When there are no people in a room, the set temperature is shifted automatically.


• The system automatically saves energy by detecting whether or not the room is occupied. The set temperature is shifted automatically if the room is unoccupied.

### Example:

- Cooling set temperature: 26°C
- Shift temperature: 1.0°C
- Shift time: 30 min.
- Limit cooling set temperature: 30°C

- \*7. Applicable when sensing panel (BYCQ125EEF6) is installed.
  \*8. These functions are not available when using the group control system.
  \*9. User can set these functions with remote controller.



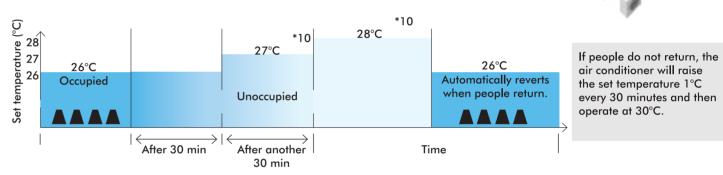

Shift temperature and time can be selected from 0.5 to 4°C in 0.5°C increments and 15, 30, 45, 60, 90 or 120 minutes respectively with remote controller.

### Sensing sensor stop mode (default: OFF) When there are no people in a room, the system stops automatically.\*11,1

- The system automatically saves energy by detecting whether or not the room is occupied.
- Based on preset user conditions, the system automatically stops operation if the room is unoccupied.

Absent stop time can be selected from 1 to 24 hrs in 1 hr increments with remote controller.



- \*11.Please note that upon re-entering the room, the air conditioner will not
- \*12.To protect the machine, the standby system may operate temporarily.

### **COMFORT**

### Unified square panels

Panel size is the same for all models. It is easy to maintain a neat appearance when multiple units are installed in the same room.



<sup>\*10.</sup> On basic screen of remote controller, set temperature does not change.

### **FCMF/FCVF-A SERIES (Contd.)**

### Optimal comfort and convenience assured by 3 air discharge modes

Air direction	Standard setting <sup>1</sup>	Draft prevention setting (field setting)	Ceiling soiling prevention setting <sup>2</sup> (field setting)
Desired situation	For gentle drafts.	When drafts are unwanted.	For shops with light coloured ceilings that must be kept spotless.
Auto-swing			
5-level air direction setting			
Auto air direction control			matically to the memorised vious air direction.

1 Air direction is set to the standard position when the unit is shipped from the factory. The position can be changed from the remote controller.

2 Closing of the corner discharge outlets is recommended.

### Switchable fan speed: 5 steps and Auto

Control of airflow rate has been improved from 3-step to 5-step. Auto airflow rate is newly available.


### **Quiet operation**

					dBA
In decourse to	Sound pressure level				
Indoor unit	Н	НМ	M	ML	L
FCMF50-71A	37	34.5	32	29.5	27.5
FCMF90-100A	45	41.5	38	35	32.5
FCMF125-140A	46	43	40	36	32.5

#Sound pressure level for FCVF-A series is same as above given table.

### Suitable for high ceilings

Even in spaces with high ceilings, a comfortable airflow is carried down to the floor level.



When all round flow is selected, ceilings up to 4.2 m in height can be accommodated. (100-140ARV16)

### **Ceiling Height Setting /Setting of Normal Air flow**

Make the following setting according to ceiling height, The second code no. is set at the factory. FCMF/FCVF-A 50-71

Mode	First Code	Second Code	Setting	Ceiling Height			
No.	No.	No.	Selling	All Round Outlet	4-Way Outlets	3-Way Outlets	2-Way Outlets
		01	Standard	Lower than 2.7m	Lower than 3.1m	Lower than 3.0m	Lower than 3.5m
13(23)	0	02	High Ceiling(1)	Lower than 3.0m	Lower than 3.4m	Lower than 3.3m	Lower than 3.8m
		03	High Ceiling(2)	Lower than 3.5m	Lower than 4.0m	Lower than 4.5m	-

### FCMF/FCVF-A 90-140

Mode No.	First Code No.	Second Code No.	Setting	Ceiling Height			
				All Round Outlet	4-Way Outlets	3-Way Outlets	2-Way Outlets
		01	Standard	Lower than 3.2m	Lower than 3.4m	Lower than 3.6m	Lower than 4.2m
13(23)	0	02	High Ceiling(1)	Lower than 3.6m	Lower than 3.9m	Lower than 4.0m	Lower than 4.2m
		03	High Ceiling(2)	Lower than 4.2m	Lower than 4.5m	Lower than 4.2m	_

The aforementioned is for standard panels. See the installation manual for designer panels. Factory settings are for standard ceiling height and all-round flow High ceiling settings (1) and (2) are set with the remote controller by field setting. High-efficiency filters are not available for high ceiling applications.

### **FCMF/FCVF-A SERIES (Contd.)**

### **CLEANLINESS**

### Silver ion anti-bacterial drain pan

A built-in anti-bacterial treatment that uses silver ion in the drain pan prevents the growth of slime, bacteria, and mould that cause odours and clogging.

(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)





### **Non-flocking flaps**

Flaps can be detached without use of tools. Condensation does not easily form and dirt does not cling to non-flocking flaps. They are easy to clean.



### Filter has anti-mould and anti-bacterial treatment

Prevents mould and microorganisms growing out of the dust and moisture that adheres to the filters.


### **QUICK AND EASY INSTALLATION**

### Lightweight

All models can be installed without using a lifter.

### Installable in tight ceiling spaces

Standard panel



### Designer panel

256mm 298mm	261mm +42mm*1 303mm
42mm*1	<u> </u>

<sup>\*1.</sup>Body height (ceiling required space) is 42 mm higher than standard panel.

### Auto grille panel




<sup>\*2.</sup>Body height (ceiling required space) is 55 mm higher than standard panel \*When the ceiling space is limited, an optional panel spacer is available.

### Easy height adjustment

Each corner of the unit has an adjuster pocket that lets you easily adjust the unit's suspended height.

If the wireless remote controller is installed, a signal receiver unit is housed in one of the adjuster pockets



### **Easy hanging**

Washer fixing plates secure washers in place and prevent washers from falling for easy installation.



### Easy removal of corner cover


It is possible to easily remove without use of screws or tools.





### Ease in temporary hanging of decoration panel

In addition to the temporary hanging fixtures in 2 places normally used, corner part mounting fixtures in 4 places are provided.




Corner part mounting fixtures (in 4 places)

Temporary hanging fixtures (in 2 places)

### FCMF/FCVF-A SERIES (Contd.)


### Temporary placement of control box lid

Because the control box lid can be temporarily hung on the unit, there is no need to climb down the stepladder to retrieve it.

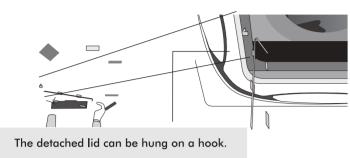


### Installed in any direction

Since the orientation of the suction grille can be adjusted after installing, the direction of the suction grille lines can be unified when multiple units are installed.




### **Drain pump**

Equipped as standard accessory with 850 mm lift.

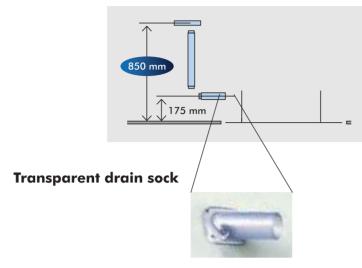

Hanging height adjustment Because the configuration of the hanger bracket changed, the dimensions from the ceiling to the hanger bracket also change during height adjustment for indoor unit.




	A Dimensions
Standard panel	125-130mm
Designer panel	167-172mm
Auto grille panel	180-185mm
Chamber option*+ Standard panel	175-180mm

<sup>\*</sup>High-efficiency filter, ultra long-life filter, and fresh air intake

### **EASY MAINTENANCE**

### The condition of the drain pan and drain water

Can be checked by removing the suction grille and drain plug.



Note: For inquiries concerning auto grille panel installations, please contact your

### 24mm diameter drain outlet

The drain outlet allows insertion of a finger or dental mirror for inspection of the internal cleanliness of the drain pan. Removal of the suction panel enables access.




### **Auto grille panel (option)**

Grille and air filter cleaning can be performed without need for a stepladder by lowering the grille.

A dedicated wireless remote controller for the auto grille panel is included, and supplied with Auto Grille panel.

The drop length corresponds to ceiling height and can be set for 8 different levels.

Ceiling Height Standard (m)	Drop Length
2.4	1.2
2.7	1.6
3.0	2.0
3.5	2.4
3.8	2.8
4.2	3.1
4.5	3.5
5.0*	3.9






AUTO GRILLE PANEL BYCQ125EASF

### FCMF/FCVF-A SERIES (Contd.)

### Ultra long-life filter (option)

Maintenance is not required in normal shops or offices for up to four years.

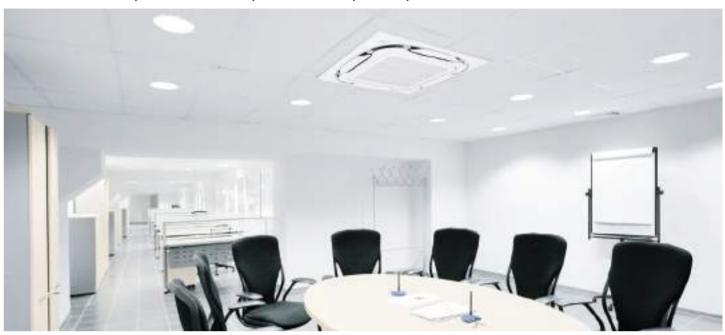


### **OPTIONS**

Options required for specific operating environments

### Ultra long-life filter unit

Even in dusty environments where the air conditioning is constantly operating, the ultra long-life filter only has to be cleaned once a year.



### Dusty area: annual filter change

\*For dust concentration of 0.3 mg/m3 (Requires separately sold Air purifier.) 1 year (Approx. 5,000 hr) = 15 hr/day x 28 day/month x 12 month/year

### Ordinary store or office: filter change every 4 years

\*For dust concentration of 0.15 mg/m³ 4 years (Approx. 10,000 hr)= 8 hr/day x 25 day/month x 12 month/years x 4 years


### High-efficiency filter unit

Available in two types: 65% and 90% colorimetry.




### Insulation kit for high humidity

Please use if you think the temperature and humidity inside the ceiling exceeds 30°C and RH 80%, respectively.



### **Panel spacer**

Use when only minimal space is available between drop ceilings and ceiling slabs.



Note: Some ceiling constructions may hinder installation. Contact your Daikin Dealer before installing your

### Sealing material of air discharge outlet

Sealing material block air discharge openings not used in 2-way or 3-way blow.

### **Branch duct (direct-connection round duct)**

A round duct can be attached without the need for a chamber.

A flanged port for direct connection of a round duct is provided. An existing branch duct chamber can also be fitted (square slit hole).

### **FCMF/FCVF-A SERIES (Contd.)**

### Low gas pressure detection



Chamber type (with T-duct joint)

**Direct installation type** (with T-duct joint)

KDDP55B160K

Connection chambe

KDDP55X160A

Duct flange

Note 6

(with insulation material)


Suction

Note 3,4,5

chamber

### Fresh air intake kit


Using this kit, a duct can be connected to take in outdoor air. There are two chamber types that have intake in two places: with T-duct joint and without T-duct joint.



### The units can be installed in the following different ways

### Chamber type (without T-duct joint)

### KDDP55B160



### Note 3,4,5

### Note:

- Use of options will increase operating sound.
- 2. Connecting ducts, fan, insect nets, fire dampers, air filters, and other parts should, as required, be obtained locally.
- 3. When a local-obtained fan is used, an interlock with air conditioner is necessary. Optional PCB (KRP1C11A) is required for interlocking.
- 4. When installing a fresh air intake kit (chamber type), two air outlet corners are closed.
- 5. It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating sound and may also influence temperature sensing.
- The volume of fresh air for direct installation type is approximately 1% of the indoor unit airflow.The chamber type is recommended when more fresh air is necessary.

### **NIGHT QUIET OPERATION MODE**

The automatic night quiet mode will initiate 8 hours after the peak temperature is reached in the daytime, and normal operation will resume 10 hours after that

### ★ Reducing noise will reduce capacity slightly.

Caaling and	Sound pressu	re level1 dBA
Cooling only	Rated2	Night Quiet Mode
RZMF50-71	48	44
RZMF100	49	45
RZMF125	52	45
RZMF140	54	45

### Note

Flexible duct

T-duct joint

Intake duct

(duct length:

4m max.)


Intake duct

(obtained locally)

(obtained locally)

<sup>1</sup>Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.


<sup>2</sup>Value when cooling. Value will differ when heating.

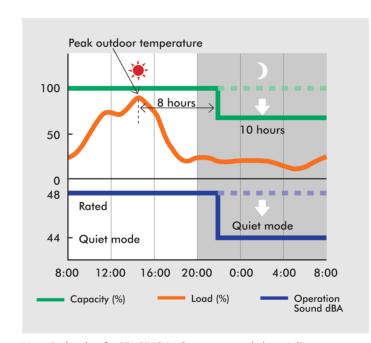

Note: Daikin date for RZMF71CVM Operating sound about 4 dB quiet

### **EASY INSTALLATION AND MAINTENANCE**

### The high efficiency compressor to achieve a high COP




### 1. Compressor equipped with reluctance DC motor

Daikin DC Inverter models are equipped with the reluctance DC motor for compressor.

The reluctance DC motor uses 2 different types of torque, neodymium magnet\*1 and reluctance torque\*2.

This motor can save energy because it generates more power with a smaller electric power than an AC or previous DC motor.



Note: Data are based on studies conducted under controlled conditions at a Daikin laboratory.

### **Reluctance DC motor**


- \*1. A neodymium magnet is approximately 10 times stronger than a standard ferrite magnet.
- \*2. The torque created by the change ir power between the iron and magnet parts.



### 2. Refrigerant cooling

(RZMF90-140, RZVF90-140)

Daikin's unique refrigerant cooling system exhibits high cooling capacity even during high outdoor temperatures.




Refrigerant cooling helps protect the printed circuit board and maintains high cooling capacity even during high outdoor temperatures.

### 3. Fan

### V-CUT PROPELLER FAN

Through use of a V-cut propeller fan that imitates the efficiency of the swan, a migratory bird, airflow becomes smooth and loss is reduced.



V-cut propeller fan

Imitating the performance of the swan

### **FEATURE - FCMF/FCVF SERIES**

Feature		FCMF	FCVF-A
	Energy consumption monitoring *1	•	•
	Auto display OFF *3	•	•
	Setpoint auto reset *3	•	•
	Setpoint range set *3	•	•
F	Circulation airflow *3	•	•
Energy Saving	Quick start *3	•	•
	Individual airflow control *3	•	•
	Infrared presence sensor	Sensing Panel	Not Available
	Infrared floor sensor	Sensing Panel	Not Available
	Humidity sensor	•	•
	Auto airflow function *3	Sensing Panel	Not Available
	Auto swing	•	•
	Swing pattern selection	•	•
	Switchable fan speed	5 step	5 step
	Auto airflow rate	•	•
Comfort	Two selectable temperature- sensors *3	•	•
	High ceiling application	3.5m/4.2m	3.5m/4.2m
	Night quiet operation *4	•	•
	Anti-bacterial air filter	•	•
Cleanliness	Silver ion anti-bacterial drain pan	•	•
	Drain pump mechanism	•	•
	Pre-charged for up to 2.0 TR -15m & above 2.0 TR 30m	•	•
Work & Servicing	Long-life filter	•	•
Work & Servicing	Filter sign	•	•
	Low gas pressure detection *4	•	•
	Emergency operation	•	•
	Self-diagnosis function	•	•
	Auto-restart	•	•
	Control by 2 remote controllers	•	•
	Group control by 1 remote controller	•	•
	External signal forced OFF and ON/OFF	•	•
Control	Emergency operation	•	•
	External command control *6	Optional	Optional
	Central remote control	Optional	Optional
	Interlock control with Heat Reclaim Ventilator	•	•
	DIII-NET communication standard	Optional	Optional
	High-efficiency filter	•	•
Ontions	Ultra long-life filter	•	•
Options	Fresh air intake kit	•	•
	Overvoltage printed circuit board *4	•	•

- Notes:

  \*1: Applicable when BRC1E62/63 is used

  \*3: Applicable when BRC1E63 is used


  \*4: For outdoor units

  \*6: Wiring adaptor for electrical appendices (and installation box) is necessary

  \*7: Option is required

  \*8: It is not possible to use 2 wireless remainder of BRC1E63 (main) and installation box) is necessary

  \*Applicable with wired remote controller. \*7: Option is required
  \*8: It is not possible to use 2 wireless remote controllers.
  Combination of BRC1E63 (main) and BRC7M (sub) is available.

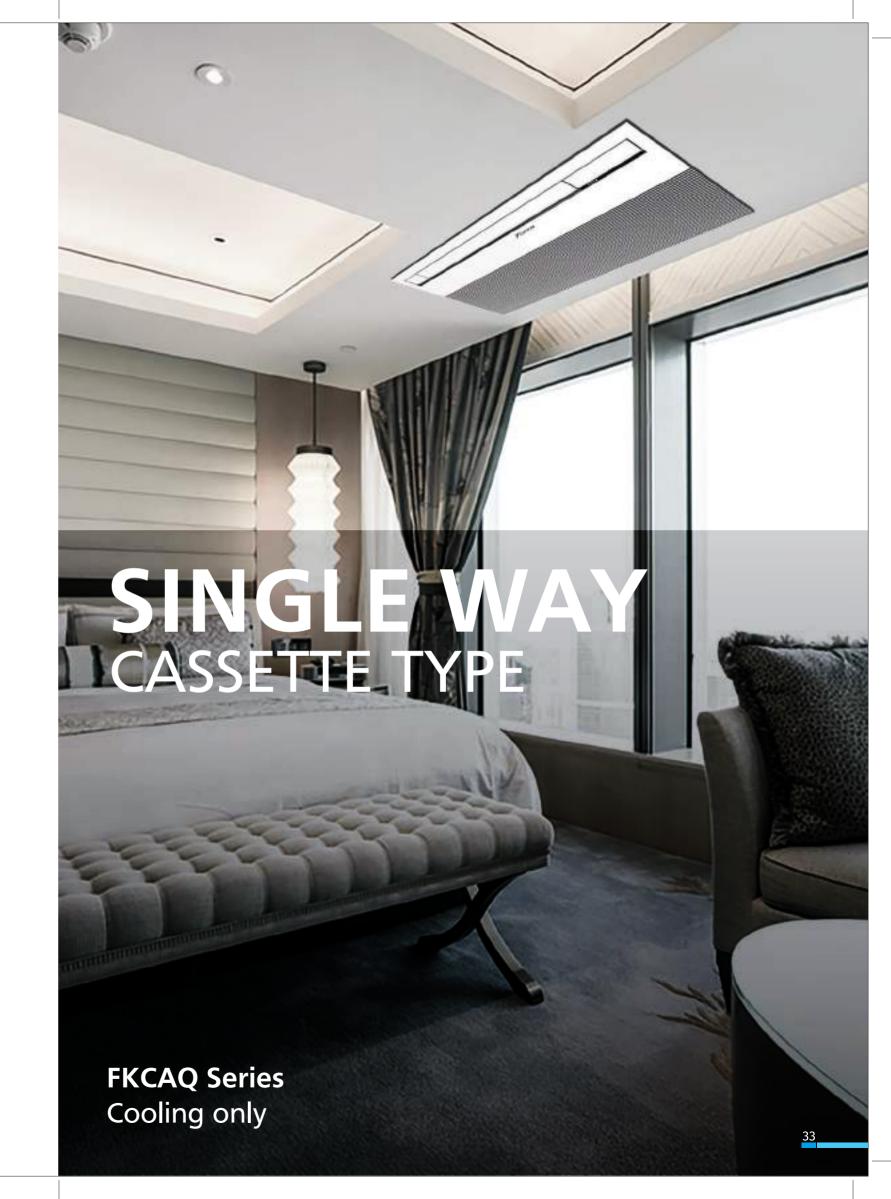

## **FKCAQ SERIES**

**Cooling Only** 











Introducing a new type of 1-Way ceiling cassette AC FKCAQ Series with streamed interior dimensions and a sharp, sleek appearance.

**FKCAQ50/71** 



5-STEP FAN SPEED



LOW CEILING HEIGHT INDOOR



QUIET



AUTOM



UTOMATIC

DRAIN PUMP MECHANISM

### Optional

### NAVIGATION REMOTE CONTROLLER (Wired Remote Controller)












### **FEATURE-FKCAQ SERIES**

Feature Details	FKCAQ
Compact & Elegant Design Indoor Unit	•
Low Ceiling Height Indoor Unit -166mm	•
Automatic Air Swing	•
Swing Pattern Selection	•
5-Step Fan Speed	•
High Ceiling Application	•
Night Quiet Operation	•
In-Built Drain Pump Mechanism (up to 700mm Lift)	•
Pre-Charge for up to 7.5m	•
Self-Diagnosis Function	•
Weekly Schedule Timer	•
Option of PM 2.5 Filter with standard Pre Filter for maintaining better IAQ	•
Anti-Corrosion treatment on Outdoor heat exchanger Copper tubes (Benzotriazole -BTA oil)	•
Over Voltage PCB	•
On/Off Timer Selector	•
Auto Swing	•
Program Mode-Cool, Dry, Auto and Fan Mode	•
Auto Restart	•

# INSTALLATION WITH SPACERS TO ADJUST CEILING HEIGHT


This IDU can also be installed in low height false ceilings i.e. the requirement of minimum ceiling height required can be reduced up to 91 mm from 166mm with multiple spacers (25mm each) from 25mm to 75mm




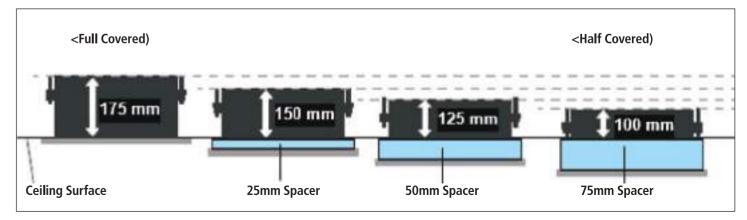


### Optional List Spacer Kit Detail:

			Space Kit-Model Name			
Item Name	Requ	uired Height (mm)	BKF25A6	BKF25CA6	BKF50CA6	BKF75SA6
			Spacers (Nos): 2 + 2	Comers 4 Nos + Screws 4 Nos	Comers 4 Nos + Screws 4 Nos	Installation Hook: 6 Nos
		App. Model/Qty.	1	1	Х	Х
Spacer 50 (mr	25 (mm)	Item/Images	//		NA	NA
		App. Model/Qty.	2	2	1	Х
	50 (mm)	Item/Images	//			NA
	75 (mm)	App. Model/Qty.	3	3	1	1
		Item/Images	//			

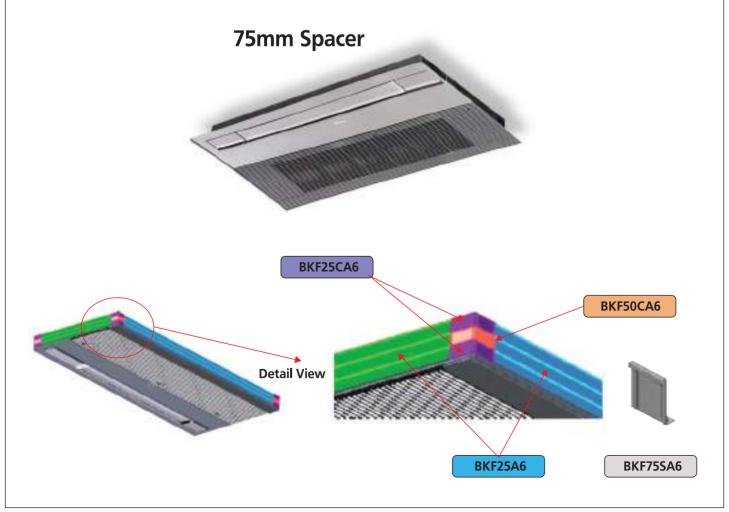

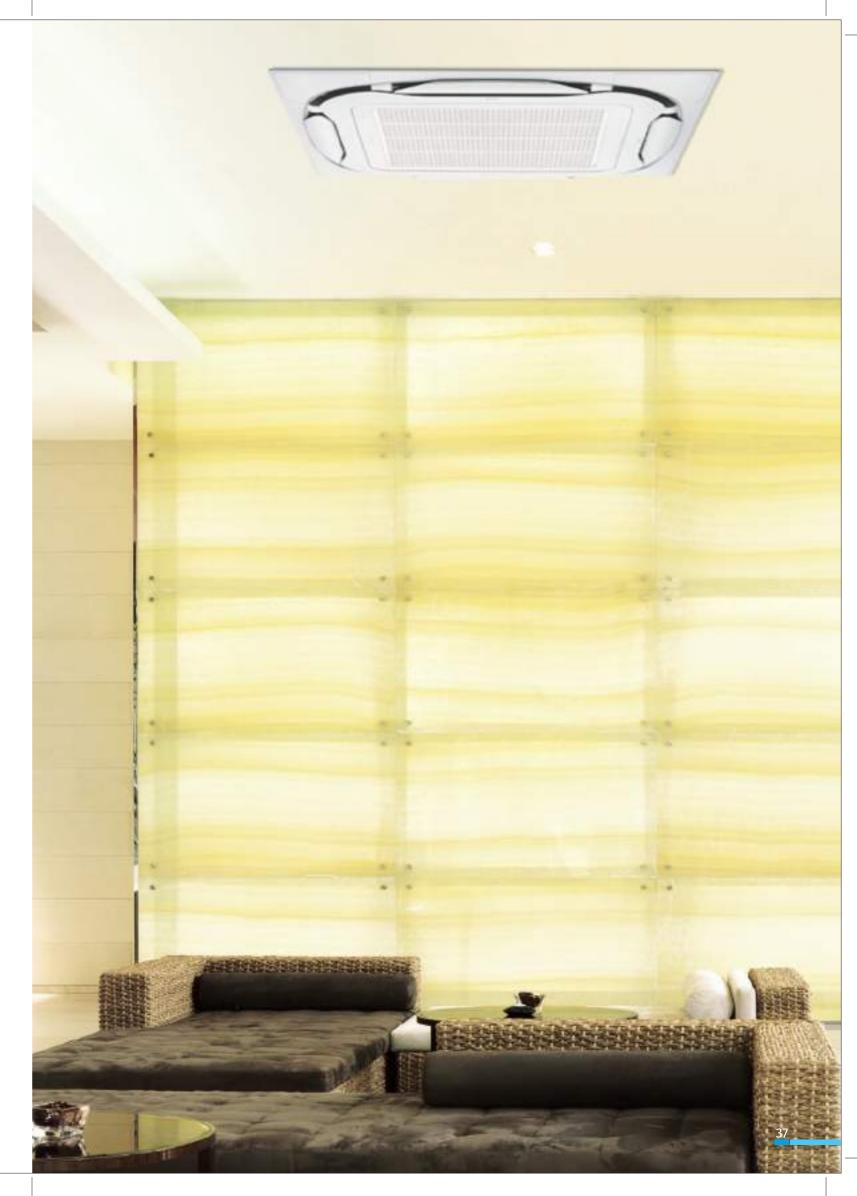

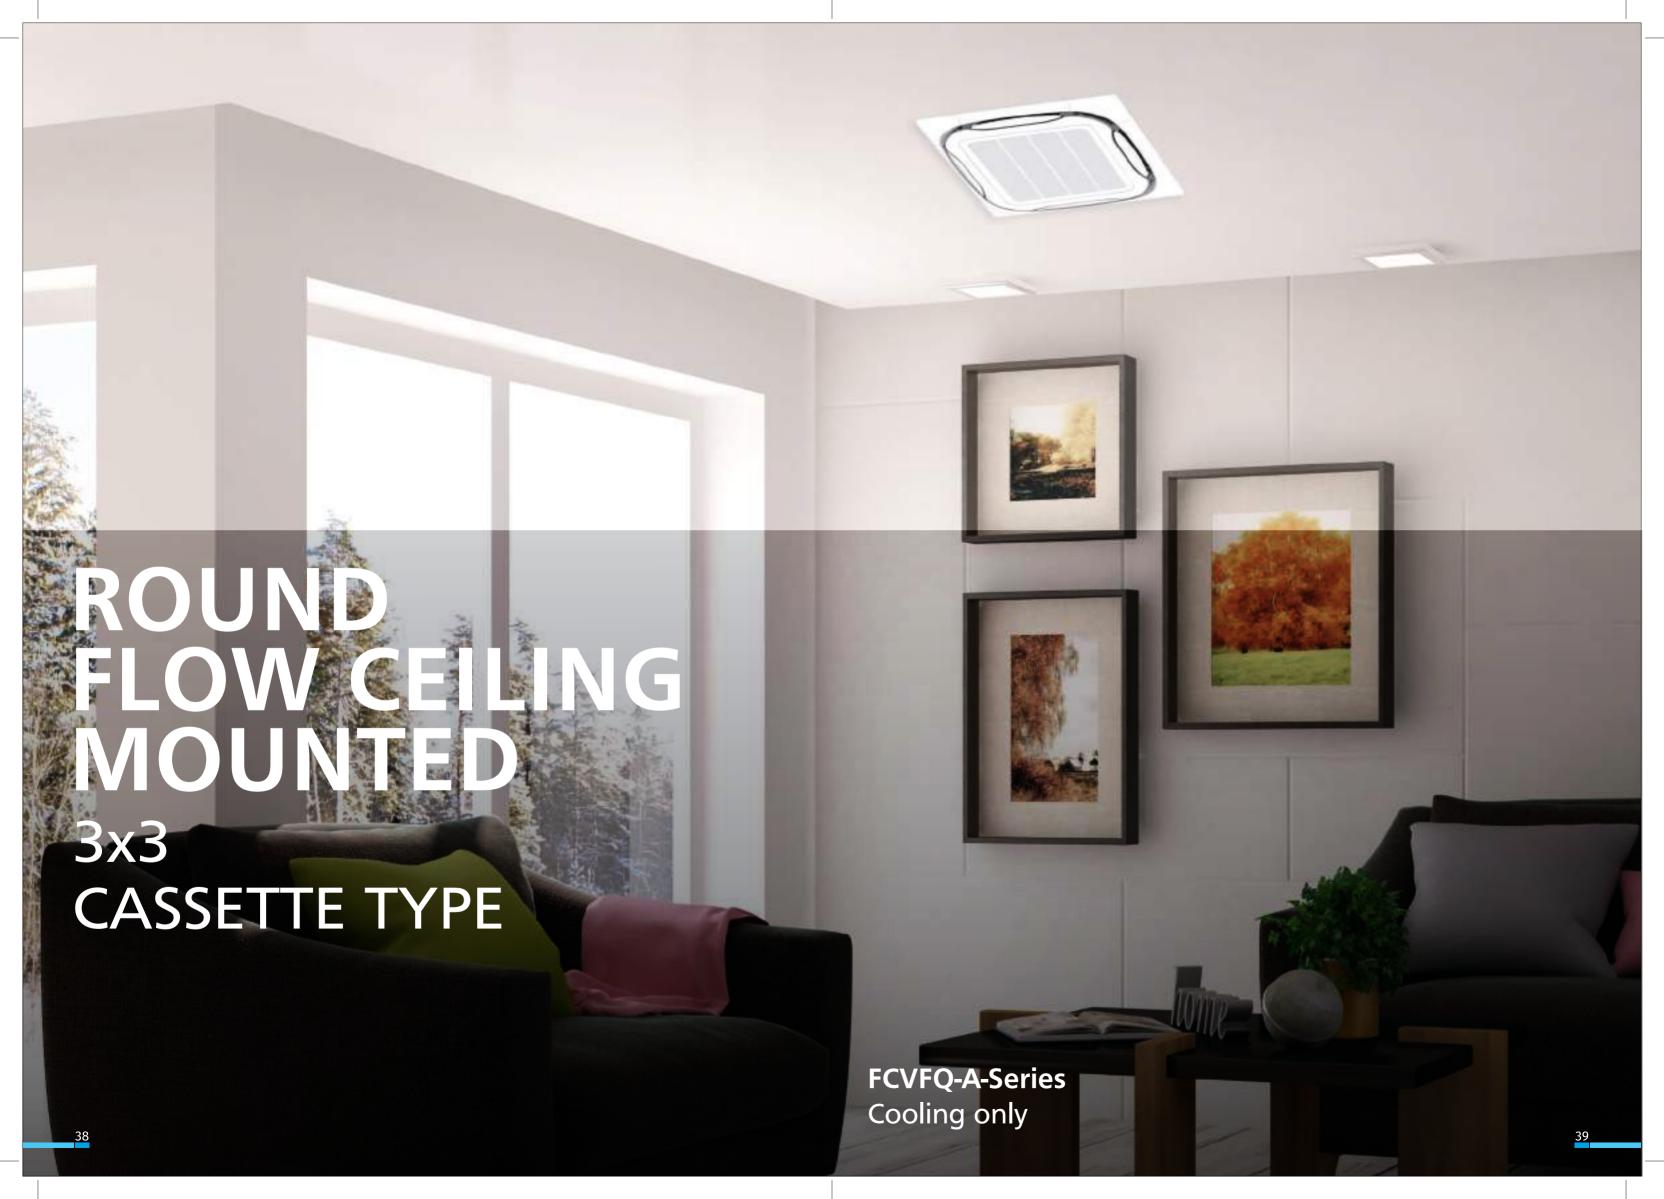

# **FCVFQ-A SERIES**

Cooling Only









Cassette air conditioner with 360° uniform airflow sets the standard

FCVFQ50/71/90/100/125/140 (with 3 star) w/o sensing panel



FLOW CONTROL





ANTIBACTERIAL DRAIN FAN

NI O



NIGHT QUIET OPERATION



D III NET COMPATIBLE (OPTIONAL)



DRAIN PUMP MECHANISM




SWING PATTER!

### **ACCESSORY REQUIRED FOR INDOOR UNIT**



### ACCESSORY REQUIRED FOR INDOOR UNIT

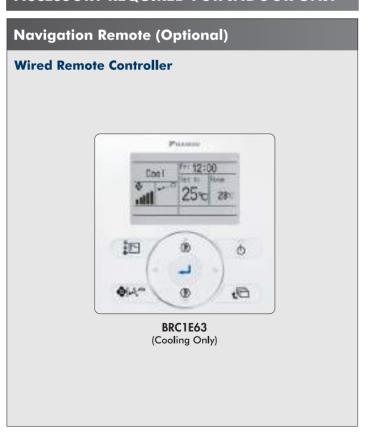



### **FEATURE – FCVFQ SERIES**


Feature		FCVFQ-A
	Energy consumption monitoring *1	•
	Auto display OFF *3	•
	Setpoint auto reset *3	•
	Setpoint range set *3	•
Engrave Carring	Circulation airflow *3	•
Energy Saving	Quick start *3	•
	Individual airflow control *3	•
	Infrared presence sensor	Not Available
	Infrared floor sensor	Not Available
	Humidity sensor	•
	Auto airflow function *3	Not Available
	Auto swing	•
	Swing pattern selection	•
	Switchable fan speed	5 step
	Auto airflow rate	•
Comfort	Two selectable temperature- sensors *3	•
	High ceiling application	3.5m/4.2m
	Night quiet operation *4	•
Cleanliness	Anti-bacterial air filter	•
Cicuminess	Silver ion anti-bacterial drain pan	•
	Drain pump mechanism	•
	Pre-charged for up to 2.0 TR -15m & above 2.0 TR 30m	•
	Long-life filter	•
Work & Servicing	Filter sign	•
	Low gas pressure detection *4	•
	Emergency operation	•
	Self-diagnosis function	•
	Auto-restart	•
	Control by 2 remote controllers	•
	Group control by 1 remote controller	•
Commit	External signal forced OFF and ON/OFF	•
Control	Emergency operation	•
	External command control *6	Optional
	Central remote control	Optional
	Interlock control with Heat Reclaim Ventilator	•
	DIII-NET communication standard	Optional
	High-efficiency filter	•
Options	Ultra long-life filter	•
Ophons	Fresh air intake kit Overvoltage printed circuit	•
	board *4	•

### Notes:

- \*1: Applicable when BRC1E62/63 is used
- \*3: Applicable when BRC1E63 is used
- \*4: For outdoor units
- \*6: Wiring adaptor for electrical appendices (and installation box) is necessary
- \*7. Ontion is required
- \*8: It is not possible to use 2 wireless remote controllers.

  Combination of BRC1E63 (main) and BRC7M (sub) is available.

\*Applicable with wired remote controller.

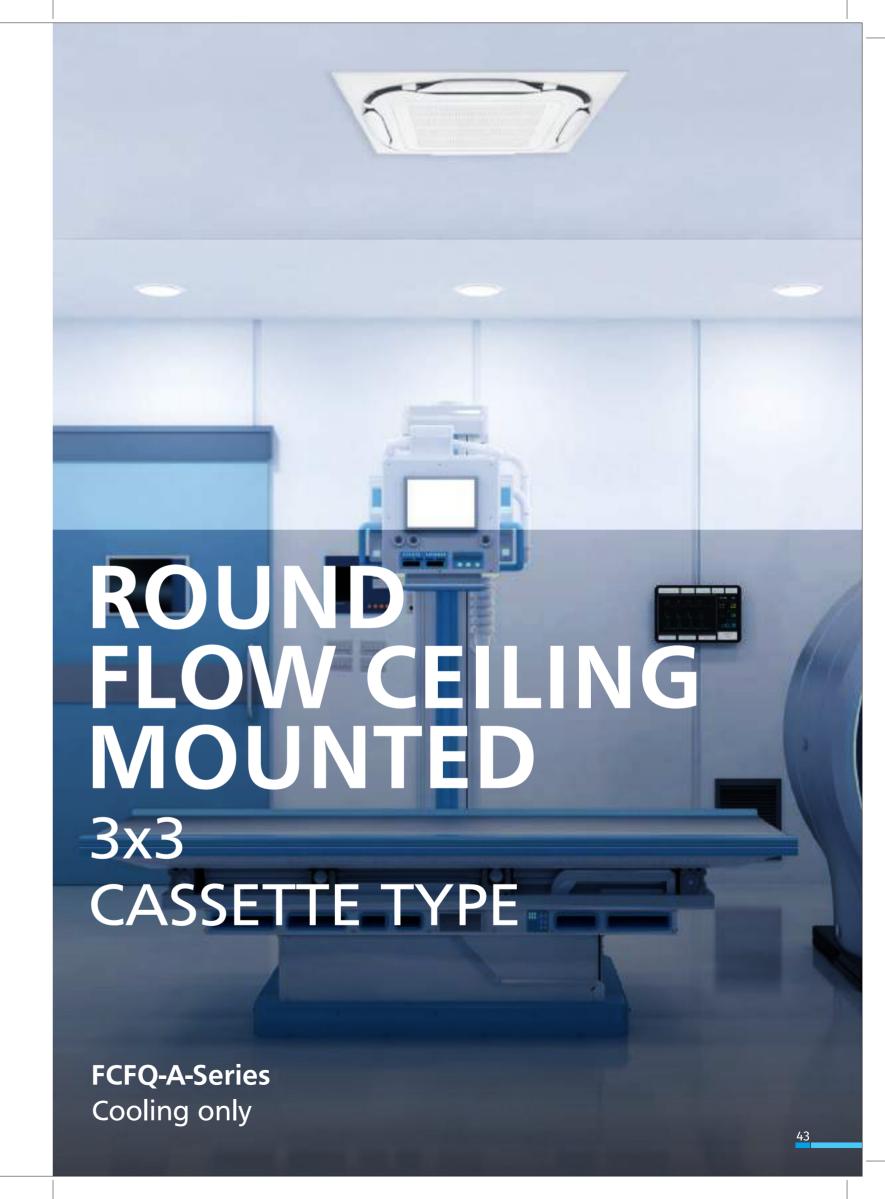

# **FCFQ-A SERIES**

Cooling Only









Cassette air conditioner with 360° uniform airflow sets the standard

FCFQ50/71/90/100/125/140 (with 3 star) w/o sensing panel



KATAI

TECHNOLOGY



INDIVIDUAL AIR







D III NET

COMPATIBLE (OPTIONAL)



SILVER ION ANTIBACTERIAL DRAIN FAN

NIGHT QUIET OPERATION

DRAIN PUMP


### KATAI Technology

K-Kosher Environment Friendly, A-Advance Technology, T-True Enhanced Life, A-Adequate Strength, I-Increased Reliability.

### • Benefits of "KATAI" Technology

- 1. Long life alloy for very aggressive Kosher environments.
- 2. MCHX is lighter in weight, smaller in volume up to 50%
- 3. Easy to re-cycle & No galvanic corrosion

### **ACCESSORY REQUIRED FOR INDOOR UNIT**

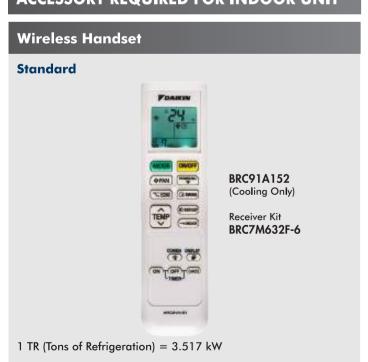

### **ACCESSORY REQUIRED FOR INDOOR UNIT**

### Navigation Remote (Optional)

### **Wired Remote Controller**




### **FEATURE – FCFQ SERIES**

Feature		FCFQ-A
	Energy consumption monitoring *1	•
	Auto display OFF *3	•
	Setpoint auto reset *3	•
	Setpoint range set *3	•
	Circulation airflow *3	•
Energy Saving	Quick start *3	•
	Individual airflow control *3	•
	Infrared presence sensor	Not Available
	Infrared floor sensor	Not Available
	Humidity sensor	•
	Auto airflow function *3	Not Available
	Auto swing	•
	Swing pattern selection	•
	Switchable fan speed	5 step
	Auto airflow rate	•
Comfort	Two selectable temperature- sensors *3	•
	High ceiling application	3.5m/4.2m
	Night quiet operation *4	•
Claudinasa	Anti-bacterial air filter	•
Cleanliness	Silver ion anti-bacterial drain pan	•
	Drain pump mechanism  Pre-charged for up to 2.0 TR -15m & above 2.0 TR 30m	•
	Long-life filter	•
Work & Servicing	Filter sign	•
	Low gas pressure detection *4	•
	Emergency operation	•
	Self-diagnosis function	•
	Auto-restart	•
	Control by 2 remote controllers	•
	Group control by 1 remote controller	•
	External signal forced OFF and ON/OFF	•
Control	Emergency operation	•
	External command control *6	Optional
	Central remote control	Optional
	Interlock control with Heat Reclaim Ventilator	•
	DIII-NET communication standard	Optional
	High-efficiency filter	•
Options	Ultra long-life filter	•
— — — — — — — — — — — — — — — — — — —	Fresh air intake kit Overvoltage printed circuit	•
Notes:	board *4	

### Notes:

- \*1: Applicable when BRC1E62/63 is used
- \*3: Applicable when BRC1E63 is used
- \*4: For outdoor units
- \*6: Wiring adaptor for electrical appendices (and installation box) is necessary
- \*7: Option is required
- \*8: It is not possible to use 2 wireless remote controllers.
  Combination of BRC1E63 (main) and BRC7M (sub) is available.
  \*Applicable with wired remote controller.



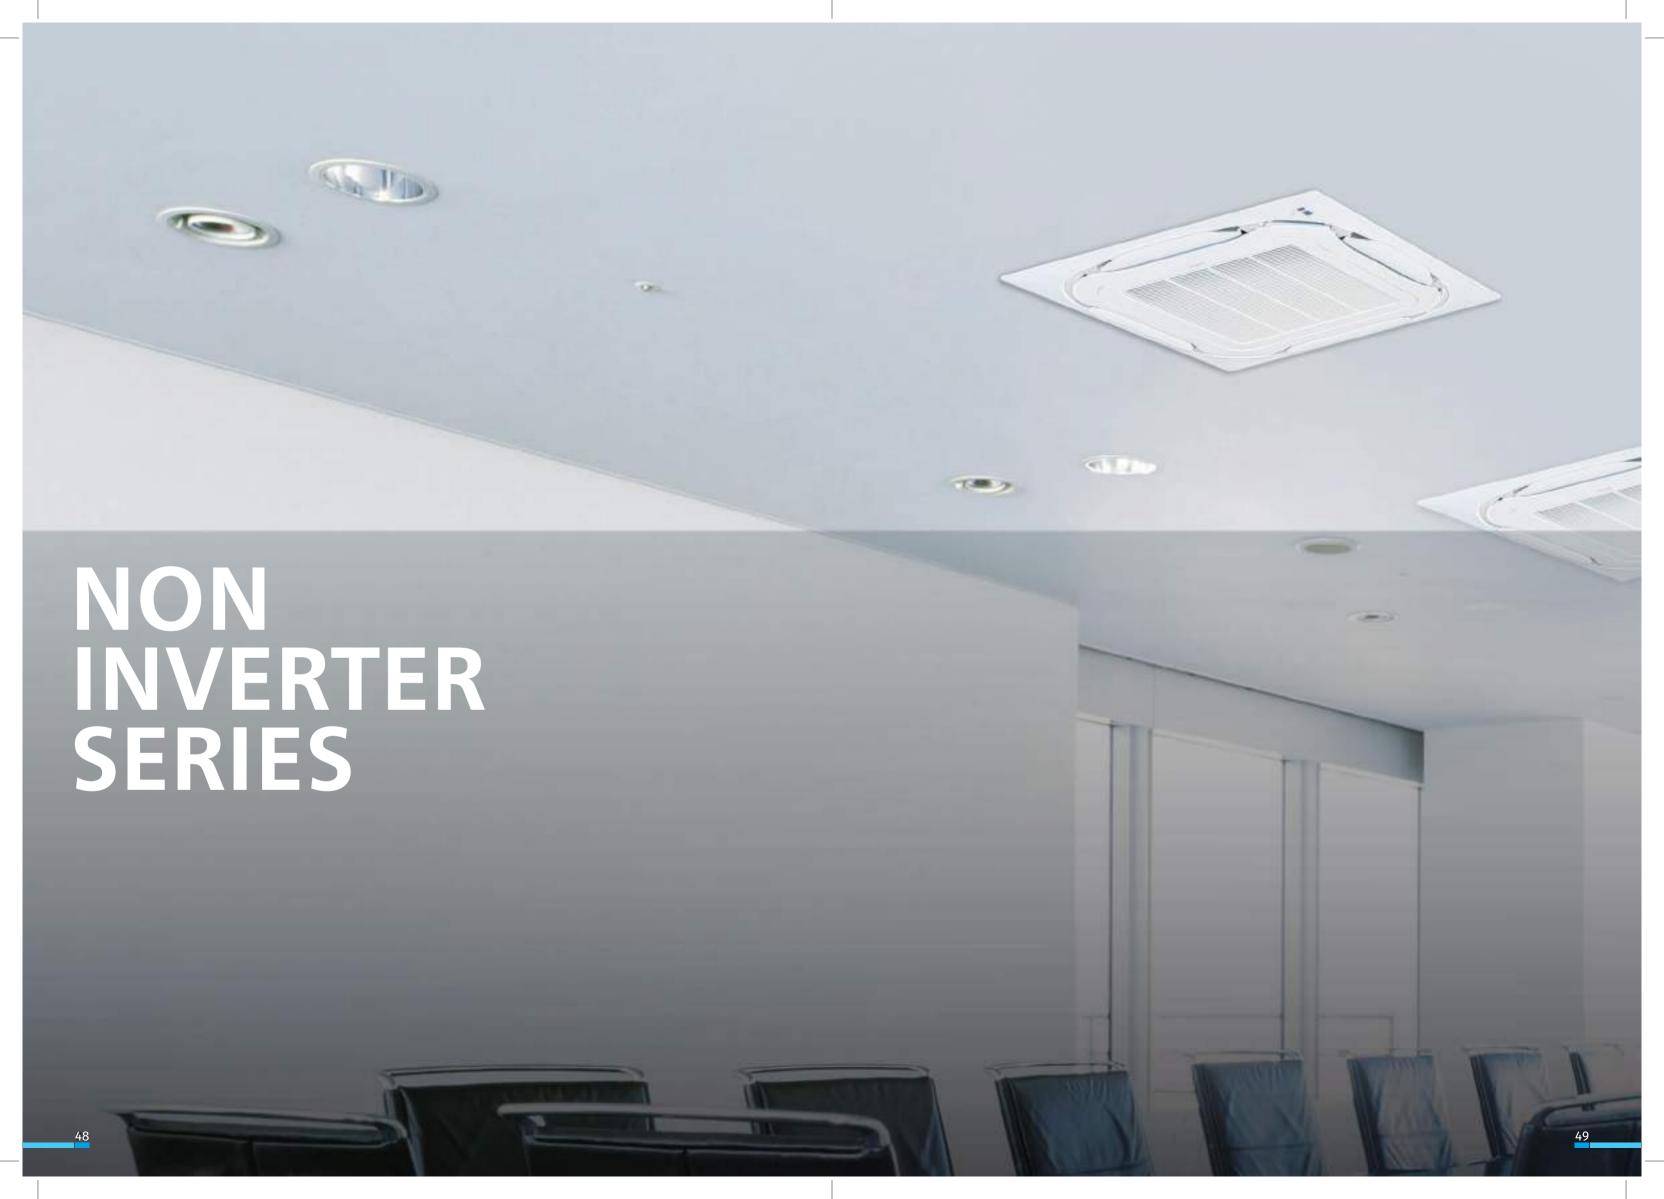



# **FCQF-A SERIES**

**Cooling Only** 







New eight way discharge panel

FCQF18/24/30/36/42/48



TEMPERATURE DISPLAY







**OPERATION** 



**AIR FLOW** 





INTAKE

**BRANCH DUCT** CONNECTION

### **ACCESSORY REQUIRED FOR INDOOR UNIT**



### **FEATURES**

Main Function	Brief of Function
ON/OFF	To Start/Stop the Unit
	Cool Mode
Mode	Fan Mode
	Dry Mode
Temperature	The Default Set Temperature will be 24°C and User can change desired temperature between 18°C to 32°C
Fan Speed can be set to "Auto>Low>L Medium>Medium>Medium High>Hig	
Power Chill	System will Operate at Maximum Efficiency for Powerful cooling for 20 Minutes .
Swing	Flaps will Start to swing /Stop at a Desired position.
Good Sleep	User can prevent excessive cooling of room during sleep.
Coanda	Directs airflow upwards.
Econo	This operation enables efficient operation by limiting the power consumption
T:	ON Timer can be set from 1 hour to 12 hours
Timer	OFF Timer can be set from 1 hour to 9 hours
Display Set temperature and error code in 7-Segment display in decorpanel	
Child Lock	Setting the Childlock disables all the buttons

except the child lock

### **Surround Air Flow**


There are four additional vents for air drafts at the corners of the panel that provide enhanced air coverage. With additional feature of automatic air swing, comfortable air can be delivered to high ceiling rooms.



### **WORK & SERVICING**

### Fresh Air Intake


Keeps the introduction of fresh air intake within 20% of total air flow.

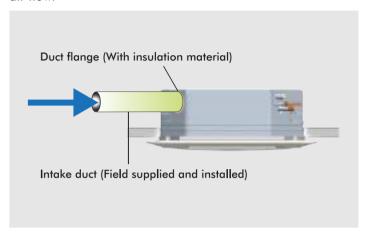

### **Superior Sound Level**

With the use of Daikin's latest technology turbo fan, cassette FCQF-A series is able to achieve exceptionally low noise level.

Once the Quiet Mode\* is enabled, indoor fan will run at the lowest speed, allowing the sound pressure level to go as low as 28dBA\*\*.

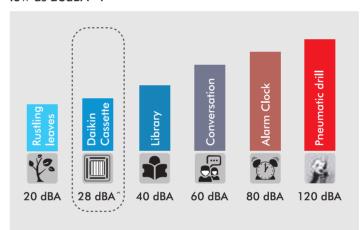

<sup>\*\*</sup>refer to model size 1.5TR & 2.0TR


### Forced On/Off Operation

Enables to operate the unit even if the remote controller is misplaced or the remote's battery is weak. Pre-set at 24°C cool mode, just press the Forced On button for instant cooling comfort.




### **Branch Duct Connection**


Improves airflow distribution when there is an obstruction It allows usage of air-conditioning for two rooms simultaneously.

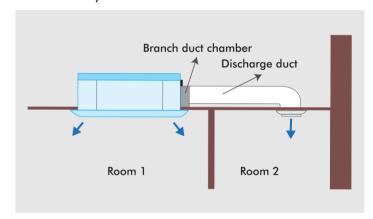

### **Built-in High Head Drain Pump**

The unit comes with a 700mm built-in, high head drain pump. A safety float is incorporated in the drain pump to monitor its water level.

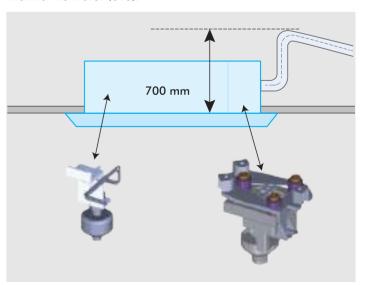

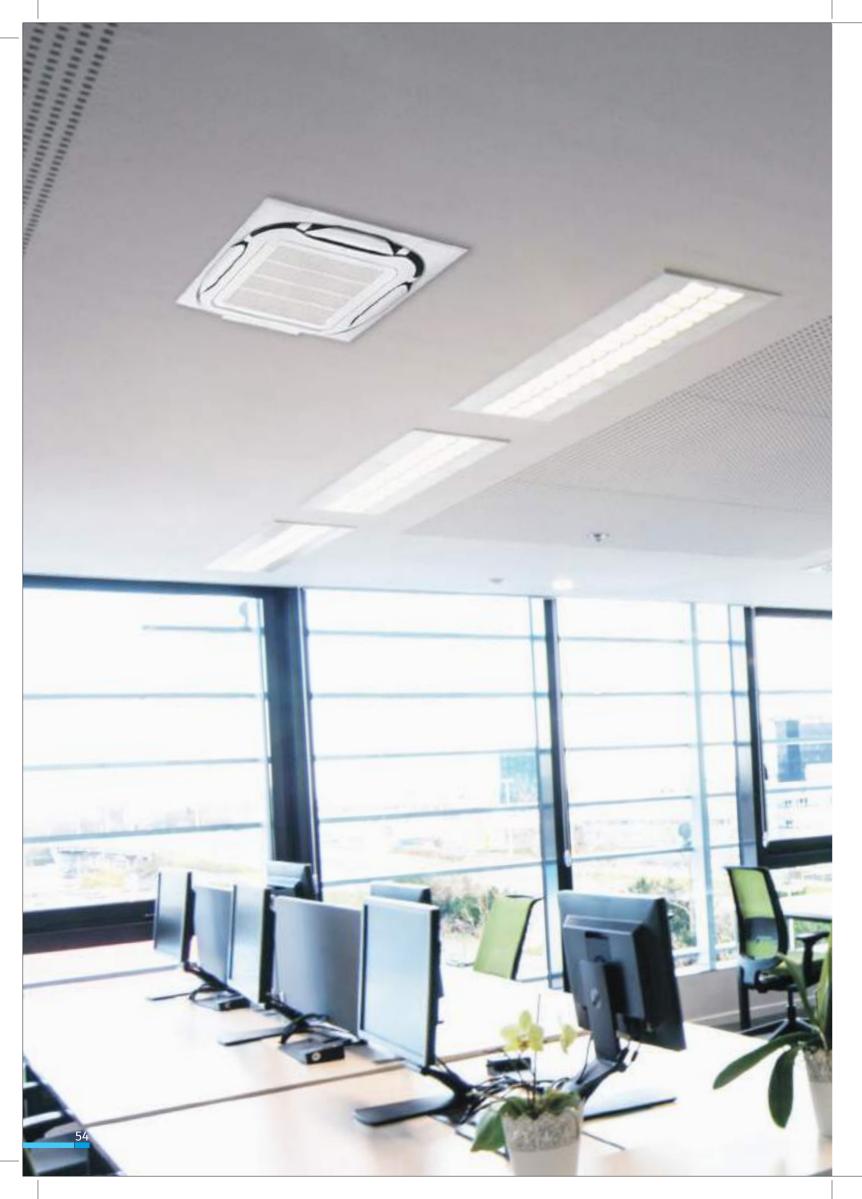

### **FUNCTION LINE-UP**

Abundance of functions that provide comfortable air-conditioning in stores and offices

### **ENERGY SAVING**

### **Energy consumption monitoring**

Past power consumption is displayed for the current and previous days as well as in weekly and yearly intervals.

### Sensing sensor stop mode

When the room is unoccupied, the system stops automatically.

### Sensing sensor low mode

When the room is unoccupied, the set temperature is shifted automatically.

### **Auto display OFF**

While operation is stopping, the LCD display can be turned off. It can be displayed again when any button is pressed.

### Setpoint auto reset

Even if the set temperature is changed, the new set temperature returns to the previous preset value after a preset duration of time.

### Setpoint range set

Saves energy by limiting the minimum and maximum set temperatures. Avoids excessive heating and cooling.

### **OFF** timer (programmed)

Sets and saves setting for an increment of time that automatically turns off air conditioner after a preset period of time for each time operation starts.

### Weekly schedule timer

Up to five operation ON/OFF settings can be programmed per day for each day of the week. Not only can the time be set for the operation ON setting, but also the temperature.

### **ON/OFF** timer

Operation starts when the preset time of the ON timer elapses and stops when the preset time of the OFF timer elapses

### **COMFORT**

### Circulation airflow

At the start of operation, airflow changes repeatedly between horizontal flow and downward flow (swing during) cool operation), and air is sent throughout the room to eliminate uneven temperatures.

### Setback

Maintains the room temperature in a specific range during unoccupied periods by temporarily starting an air conditioner that had been turned OFF.

### **Quick start**

At operation start, capacity priority operation is possible.

### Individual airflow control

Airflow direction can be individually adjusted for each air discharge outlet to deliver optimal air distribution.

### Infrared presence sensor

The sensor detects the presence of people in each of the 4 areas

### **Humidity sensor**

Not only temperature but also humidity is detected, and adjustments are made for comfortable air conditioning.

### Auto airflow function

When this function is set, airflow direction can be directed toward or away from people when human presence is detected.


### Auto swing

Delivers comfortable air-conditioning to all areas, near to and far from the air-conditioner.

• The airflow direction can be fixed at your desired angle by the remote controller.

### Swing pattern selection

You can freely set air discharge settings by remote controller.




### Switchable fan speed

High setting provides maximum reach while low setting minimises drafts.

### High fan speed mode

You can increase fan speed approximately 10% higher than the "high" setting.

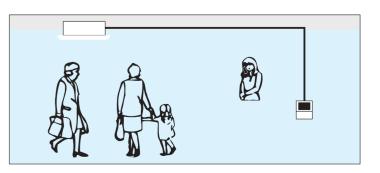

Note: Some features are only available on selected models. See overview pages for full list of features applicable to each unit.


### **FUNCTION LINE UP (Contd.)**


### Two selectable temperature-sensors

Temperature-sensors are included in the indoor unit and optional wired remote controller. Temperature sensing closer to target area is possible to further increase the comfort level.

• Use the temperature-sensor in the indoor unit when controlling air conditioning from another room.

Note: Wireless remote controllers have no temperature-sensor.





### High ceiling application

Delivers air-conditioning comfort all the way down to the floor in air-conditioning zones with high ceilings.

Note: When units are installed on high ceilings, depending on the model, various restrictions concerning maximum height, air discharge direction, and choice of options may apply.

### Night quiet operation

The Automatic night quiet mode will initiate 8 hours after the peak temperature is reached in the daytime, and normal operation will resume 10 hours after that.

### **CLEANLINESS**

### **Anti-bacterial air filter**

The air filter has an anti-bacterial treatment to help prevent the growth of bacteria and mould on it.

### Mould-proof air filter

Sanitary filter has mould-resistant treatment.

### Silver ion anti-bacterial drain pan

A built-in anti-bacterial treatment that uses silver ion in the drain pan prevents the growth of slime, bacteria, and mould that cause odours and clogging.

### Mould-proof drain pan

Mould-proof drain pan prevents growth of mould in highly humid conditions.


### **WORK & SERVICING**

### Auto grille panel

Grille and air filter cleaning can be performed without need for a stepladder by lowering the grille

### Drain pump mechanism

Steeper gradient realises more efficient condensate drainage. High-lift is especially useful for long lengths of drain piping.

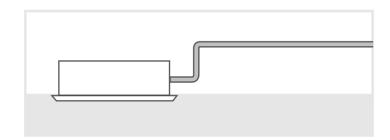

### Pre-charged for up to 30 m

If refrigerant piping length does not exceed 30m, there is no need for on-site gas charging.

### **Long-life filter**

Maintenance is not required for one year\*. The filter is washable and can be reused.

\*For dust concentration of 0.15 mg/m<sup>3</sup>

### Filter sign

The filter sign warns you when it is time to clean the filter.

\*When using a wired remote controller the sign is displayed in the LCD. When using a wireless remote controller the filter sign lamp illumnates on the signal receiver unit.

### Low gas pressure detection

Insufficient gas charging is normally hard to detect. During test run after installation and regular inspection, the refrigerant level is monitored by a microprocessor to maintain proper gas pressure. Reliability is assured and maintenance and inspection can be carried out more quickly.

### **Emergency operation**

Even if there is a malfunction elsewhere in the system, the fan or compressor can still be operated. (depending on the malfunction)

### **Self-diagnosis function**

The operating parameters of indoor and outdoor units, and sensor data at critical locations throughout the system are constantly monitored using a microcomputer. To facilitate quick response in the event of a malfunction, a message appears on the LCD of the remote controller and an LED on the unit illuminates.

### Service contact display

When installing the unit, registration of the service contact is available to the wired remote controller.

### CONTROL

### **Auto-restart**

If there is a power outage while the equipment is operating, operations will restart in the same mode as before the power cut when electricity is restored.

### **Control by 2 remote controllers**

Using 2 remote controllers you can operate the equipment locally or from a remote location.

\*When a wireless remote controller is used, it is not possible to use 2 wireless remote controllers.

Combination of BRC1E63 (main) and BRC7M (sub) is available.

### Group control by 1 remote controller

You can turn up to 16 indoor units ON/OFF with a single remote controller. (When using connected indoor units, the settings must all be the same and on/off will be simultaneous.)

### **External equipment interlock**

Human presence is detected by the built-in infrared presence sensor in the sensing panel, and the presence detection signal can be output and interlocked with external equipment. Power conservation is possible though the interlock of external equipment, such as lighting, with the infrared presence sensor.

\*Adaptor for Wiring (and installation box) is necessary.

### External signal forced OFF and ON/OFF operation

The air conditioner can be interlocked with the keycard system and turned ON/OFF by locking and unlocking the room. The air conditioner can be also be turned OFF by the interlock with the ventilation and lighting OFF signal.

\*Field setting with remote controller.

### **External command control**

Operation and monitoring is carried out using the contact signal from the operation control box in the building monitoring room.

### **Central remote control**

Optional central remote controller enables centralised control of up to 1024 indoor units (64 groups) from up to 1 km away.

### Interlock control with Heat Reclaim Ventilator

Enables interlocking control with external equipment such as Heat Reclaim Ventilator.

### **DIII-NET** communication standard\*

Connection to a centralised control system is available without need for an optional adaptor.

\*Available in Inverter Series only.

### **OPTIONS**

### **High-efficiency filter**

Two types are available: 65% and 90% colorimetry.

### Ultra long-life filter

Requires no maintenance for about 4 years\* (10,000h) in stores and offices.

\*For dust concentration of 0.15 mg/m<sup>3</sup>

### Fresh air intake kit

You can provide air-conditioning with fresh air from outside. Convenient for places where a ventilation fan cannot be installed.

### Overvoltage PCB

Optional circuit eliminates the need for a stabiliser and offer additional protection for devices in the outdoor unit, such as its fan motor and compressor.

# APPLICATION OF THE PRODUCT



Versatility and control are the keys to create a comfortable condition within trading areas and changing rooms that will keep customers shopping. It's important to select a system that offers excellent performance, while minimising operating costs and energy consumption.



Computer systems run round the clock and require a controlled temperature environment to operate effectively. Equipment in these rooms can generate a lot of heat and not removing the heat effectively can cause computer servers to malfunction. Downtime from inoperable servers can mean lost business and productivity.




The challenge for an office or bank is the ability to effectively heat or cool open plan areas as well as meeting rooms. Cooling a meeting room when it is empty will mean running costs mount up unnecessarily. Conditions within open-plan areas are important for staff comfort levels.



Guests expect a perfect atmosphere, including comfortable conditions. Heat generated from lighting, the kitchen area and the dining area can all contribute to make restaurants uncomfortable with inadequate air-conditioning. Air-conditioning needs to be discreet and flexible to meet the demands of your restaurant and customers.



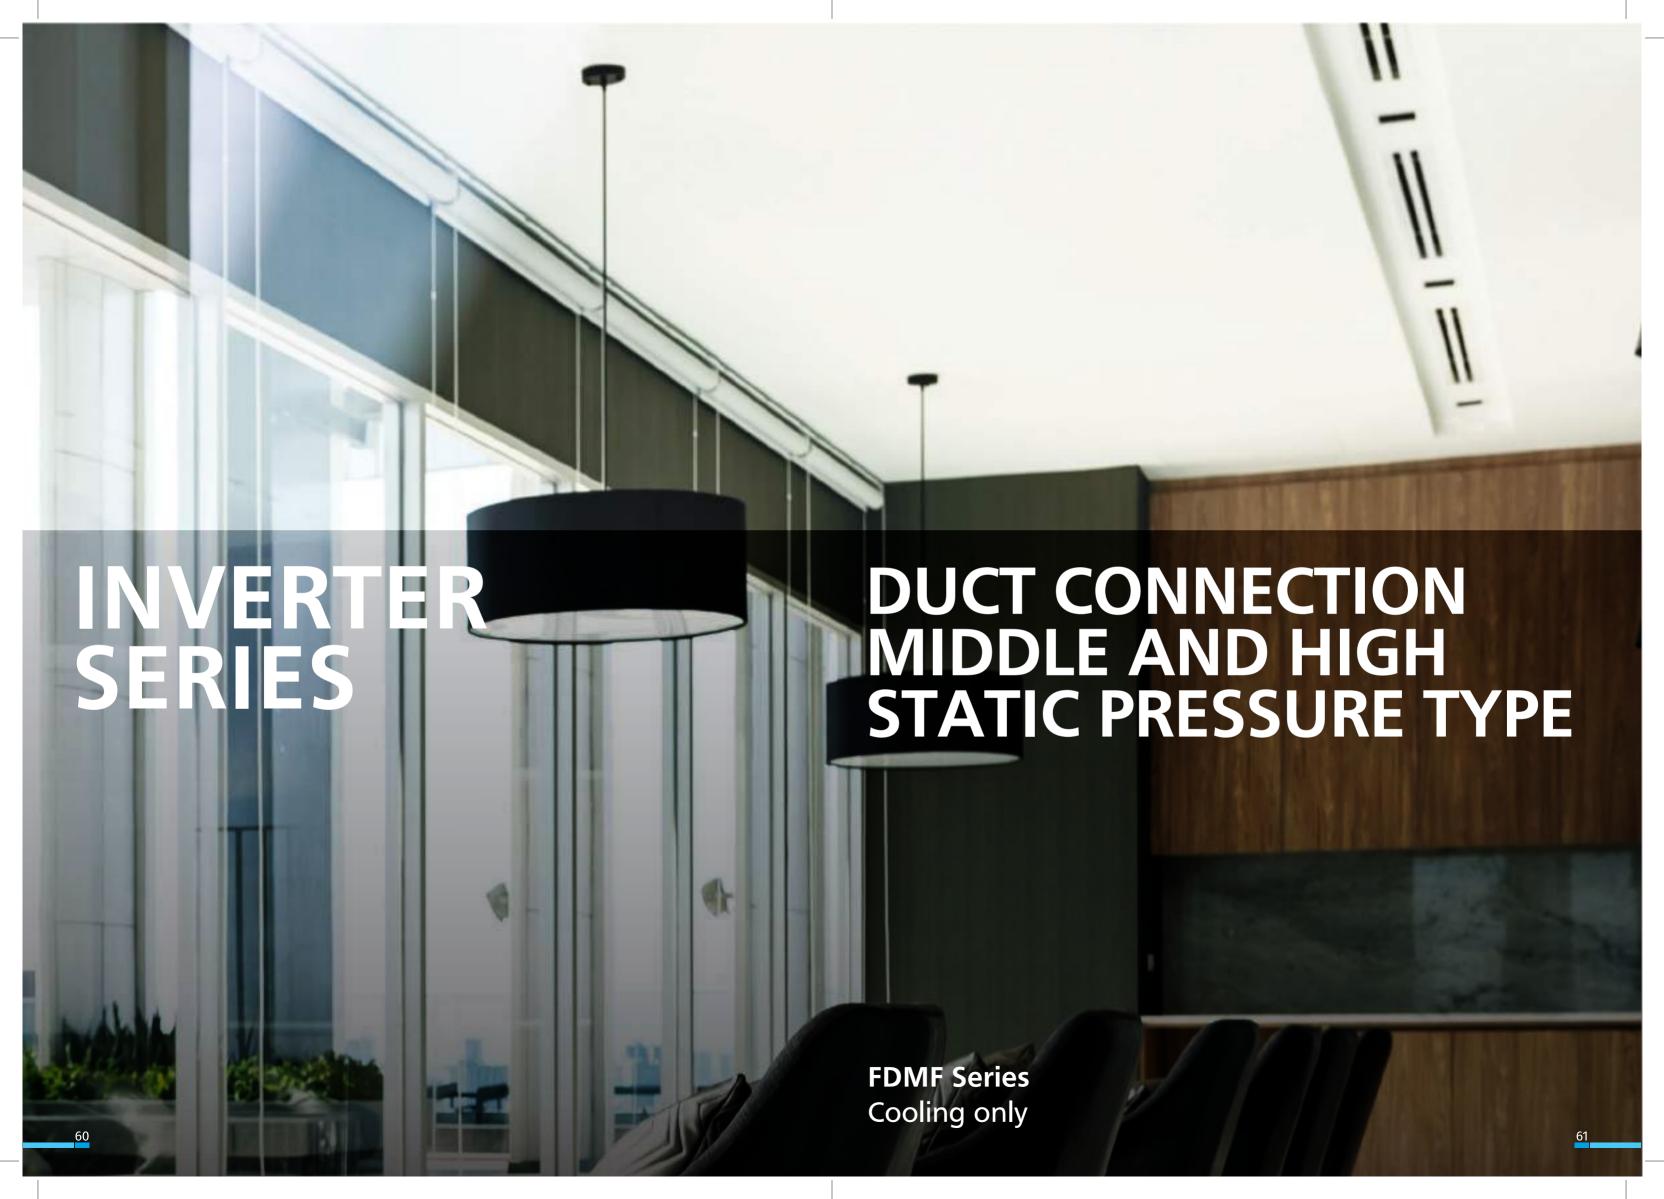

### **FDMF SERIES**

**Cooling Only** 







Flexible use of space is made possible using ducts to create a room filled with comfort.

The compact, and elegant design **Ceiling Concealed Indoor Unit of the FDMF** Series are the perfect answers for the air-conditioners requirements of building with minimum Ceiling Installation space and wide-ranging external static pressure, energy saving efficiency has been improved, thereby reducing electricity consumption.

FDMF50/71/90/100/125/140



**USE REMOTE CONTROLLER TO** ADJUST AIRFLOW



HIGH EFFICIENCY **SWING ROTARY** 



HIGH AMBIENT TEMPERATURE



MOST SILENT INDOOR **OPERATION** 



HIGH PRESSURE & COMPRESSOR **OVERLOAD SAFETY** 



**UNDER VOLTAGE** & OVER VOLTAGE

### **ACCESSORY REQUIRED FOR INDOOR UNIT**





62

**FEATURES** 

	FDMF	Only
	Switchable fan speed (3-speed fan setting)	•
	Programme 'Dry'	•
	Two selectable temperature-sensors	*1
Comfort	Hot start (after defrost)	_
	Year-round cooling applicable	_
	Night quiet operation	*2
	Timer selector	•
	Weekly schedule timer	*3
cl l'	Anti-bacterial air filter	*4
Cleanliness	Silver ion anti-bacterial drain pan	•
	Drain pump mechanism	•
	Pre-charged for up to 30 m for 90-140 models	•
	Pre-charge for up to 15m for (50/71) models.	•
Work & Servicing	Long-life filter for 90-140 models	*4
<b>3</b>	Filter sign	•
	Low gas pressure detection	*2
	Emergency operation	•
	Self-diagnosis function	•
	Auto-restart	•
	Auto-cooling/ heating change-over	_
Control	Control by 2 remote controllers	•
Control Features	Group control by 1 remote controller	•
	External command control	•
	Central remote control	•
	Interlock control	•
Options	High-efficiency filter	•
Others	Anti-corrosion treated heat exchangers	*2

- Applicable when wired remote controller is used
- Applicable when BRC1E62 is used
- \*4

#Due to continuous R&D, features may vary from model to model

### **COMFORT**

### QUIET OPERATION

		dBA
INDOOR UNIT	нівн	LOW
50 D	33	26
71 D	38	34
90 D	38	32
100 D	38	32
125 D	42	35
140 D	42	35


### • TWO SELECTABLE TEMPERATURE-SENSORS

Both indoor unit and wired remote controller (option) contain temperature-sensors. Temperature sensing can be set at the unit or, to further improve comfort level, closer to the target area at the wired remote control. This feature must be set during commissioning by the technicians.

Temperature-sensor on indoor unit must be used when the air-conditioner is controlled from another room. Wireless remote controller does not have a temperature-sensor.

### • INCREASED FREEDOM OF DESIGN, THANKS TO VARIABLE **CONTROL OVER EXTERNAL STATIC PRESSURE**

Comfort airflow achieved in accordance with conditions such as duct length. Using a DC fan motor, the external static pressure can be controlled within a range of 50 Pa to 200 Pa.



<sup>1</sup> TR (tons of refrigeration) = 3.517 KW

# **FDMFQ SERIES**

Cooling Only







Flexible use of space is made possible using ducts to create a room filled with comfort.

FDMFQ50/71/90/100/125/140



USE REMOTE CONTROLLER TO ADJUST AIRFLOW



IIGH EFFICIENCY SWING ROTARY COMPRESSOR



HIGH AMBIENT TEMPERATURE WORKING



MOST SILENT INDOOR OPERATION



& COMPRESSOR OVERLOAD SAFETY



UNDER VOLTAGE & OVER VOLTAGE PROTECTION

### **ACCESSORY REQUIRED FOR INDOOR UNIT**





	1		
rd			


**FEATURE FDMFQ High Efficiency Swing Compressor** Night Quiet Operation Silver Ion Anti-bacterial Drain Pan **DIII** Net Compatibility Auto Restart Self-Diagnosis Function High Pressure Compressor Overload Safety Under Voltage & over Voltage Protection for ODU Drain Pump Mechanism \*Anti-Corrosion Treatment on Outoor Heat Exchanger Copper Tubes (Benzotriazole-BTA oil) Programme Mode-Cool, Dry, Auto and Fan Two Selectable Temperature Sensors (Via-Wired Remote) Switchable Fan Speed (2,3 Step) Pre-charged for up to 10m Filter Sign **Emergency Operation** Overvoltage Printed Circuit Board Weekly Schedule Timer (When wired remote BRC1E62/3 is used)

<sup>1</sup> TR (tons of refrigeration) = 3.517 KW \*Applicable for selected models

<sup>\*</sup>Available in selected models

### SIMULTANEOUS AIR-CONDITIONING OF TWO ROOMS AND VENTILATION GRILLE (VENTILATION OPENING)

When air-conditioning two rooms simultaneously, the air discharged into each room must be circulated back to the air-conditioner. To achieve this, a ventilation duct should be installed for each room or one of the indicated ventilation grilles should be installed on the partitioning wall or under the door between the rooms.

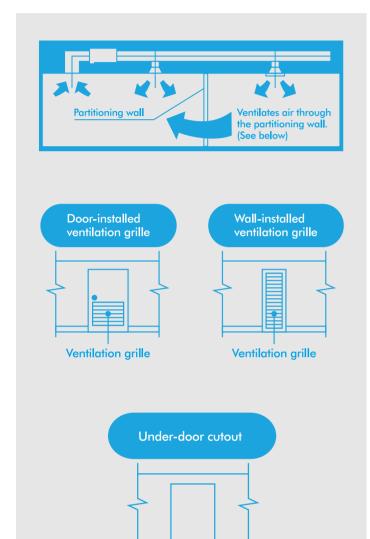

Note: The under-door cutout method should be used only when there is a small

**Under-door cutout** 

### **CLEANLINESS**

smells and clogging.

### BACTERICIDAL TREATMENT FOR DRAIN PAN Anti-bacterial treatment that includes silver ions, is used which assists in preventing the growth of microorganisms that cause

### **WORK & SERVICING**

### • THIN, LIGHTWEIGHT INDOOR UNIT MAKES DELIVERY AND INSTALLATION EASY

With a height of only 300mm, installation is possible even in buildings with narrow ceiling spaces.



Indoor unit	Height (mm)	Width (mm)	Depth (mm)	Machine weight (kg)
50 D	300	1,000	700	34
71 D	300	1,000	700	34
90 D	300	1,400	700	43
100 D	300	1,400	700	43
125 D	300	1,400	700	45
140 D	300	1,400	700	45

Drain pump is equipped as standard accessory with 700mm lift.



### REDUCED INSTALLATION TIME


USE REMOTE CONTROLLER TO ADJUST AIRFLOW When testing standard integrated ceiling units that employ duct work, much time is required to adjust airflow to the right level. Thanks to the ability provided by Daikin to automatically perform this troublesome adjustment using a remote controller, this step is now quick and easy. (Adjust by H tap).

- Adjust to approximately ±10% of the rated H tap airflow.
   Once actual operation has begun, adjustment of the rated airflow is not possible.

### • EASY MAINTENANCE

Maintenance is easy because the drain pan can be removed.



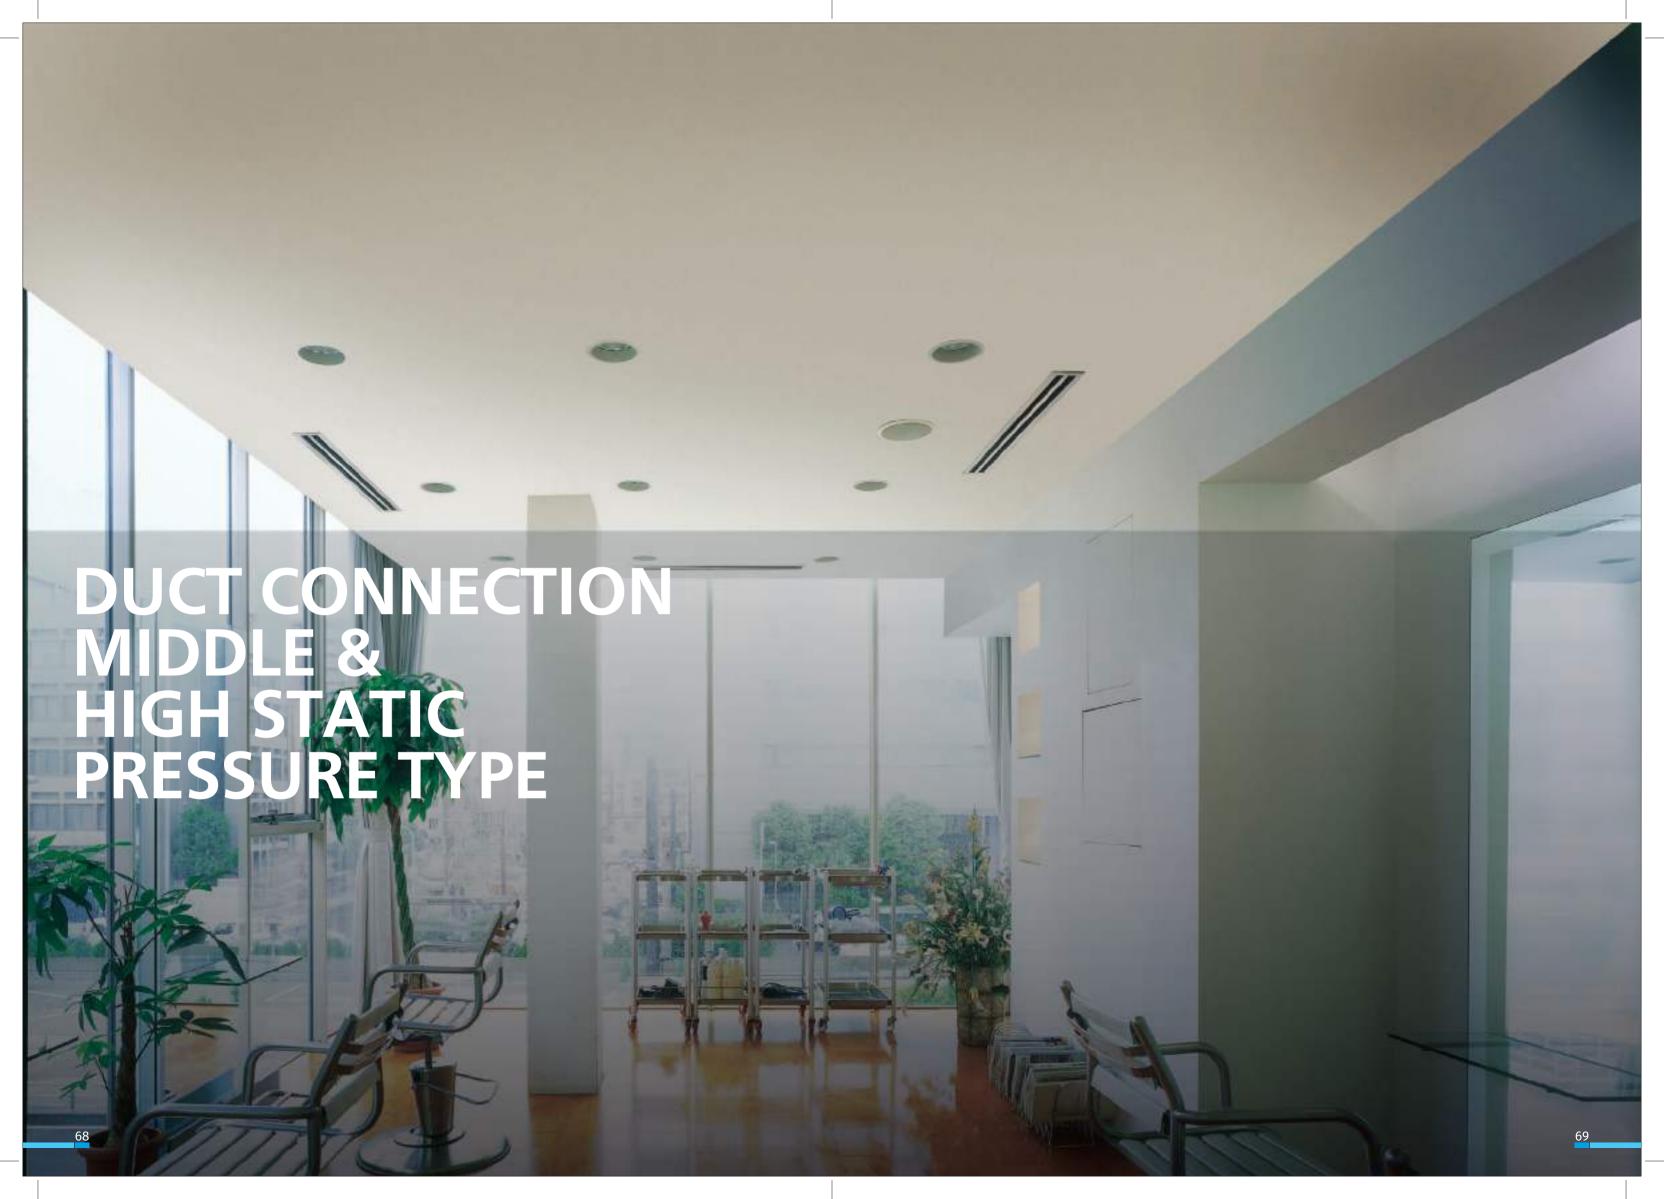

# **FDMR**

Cooling Only

### **R-410A**



Flexible use of space is made possible using duct to meet high static and large airflow for wider coverage commercial requirements

FDMR36



3-PHASE POWER SUPPLY



HIGH AMBIENT TEMPERATURE WORKING UP TO 48°C



MOST SILENT INDOOR OPERATION



COMPACT & SPACE SAVER IDU 375 MM



PRE CHARGE ECO GREEN REFRIGERANT

FDMR36ERV16

2 A TD

(Cooling)

### **ACCESSORY REQUIRED FOR INDOOR UNIT**



CAPACITY TONNAGE (TR)		3.0
3.0 TR NON INVERTER D	3∅	
STATIC PRESSURE		30 Pa



# FDB/MF & FDMQN SERIES

Cooling Only & Heat Pump



Enhance the décor of your room with the new unobtrusive concealed series



HIGH EFFICIENCY SWING ROTARY COMPRESSOR

FDBF12~FDMF48 (COOLING ONLY)

FDMQN25~140 (HEAT PUMP)



HIGH AMBIENT TEMPERATURE WORKING



MOST SILENT INDOOR OPERATION

3.5 KW ~ 14.0 KW 2.8 KW ~ 16.1 KW

2.8 KW ~ 16.1 KW



ULTRA LOW HEIGHT IDU (250MM)



SELECTABLE

**FAN SPEED** 

R-410A

OW IT

COOLING	R-32
COOLING	R-410A

### **ACCESSORY REQUIRED FOR INDOOR UNIT**





HEATING

<sup>\*</sup>Available with FDMQN models.

### FEATURES FDMR(Q)N

### **EXCELLENT AIR DISTRIBUTION**

The conditioned air can be distributed evenly to every corner of the room through ducting. This helps to create a pleasant environment and maintain comfort. Furthermore, multiple areas can be conditioned simultaneously by using just one indoor unit.

### **AUTO RANDOM RESTART WITH LAST-STATE-MEMORY**

In the event of a sudden power failure during operation, unit restarts automatically in 64 different recovery timing patterns (within 180 seconds to 244 seconds) and the unit will operate based on the previous setting (operating mode, temperature setting and fan speed). This ensures that air-conditioners in the same building resume randomly instead of all units resuming at the same time, preventing power surge after a blackout.

### **DOUBLE PROTECTION DRAINAGE SYSTEM**

The primary drain pan is designed with high thermal insulation material and moulded in gradient for better condensate water drainage. The extra secondary drain pan 'built-in' to the standard unit offers extra protection against possible water leaking problems.

### **FLEXIBILITY IN SYSTEM DESIGN**

The unit offers fan motor that can operate up to 4 speeds, thus providing choices of external static pressure for designing ducting system.

### **SELF DIAGNOSIS FEATURES**

The microprocessor provides the possibility to detect and to diagnose any faults that occurs in the system. Faults are displayed as error code in the wired controller. This will ease the troubleshooting process.

### FEATURES FDB/MF

### WIDE EXTERNAL STATIC RANGE

Wide static range makes these series suitable to wide applications. Low static machines finds their application at space constraint areas i.e. Hotels and apartments. This series offering includes mid static machines also which meet the static requirements of long ducts and multi zones.

Refrigerant	Model Size (TR)	1.0	1.5	2.0	2.5	2.8	3.5	4.0
R-32	Static (Pa)	20	20	20	20	30	40	50

### LOW HEIGHT APPLICATION

New residential and commercial spaces, HVAC requirement are tilting towards low height indoor machines. FDBF range of low static machines with unit's height as low as 250 mm are the perfect match for low ceiling height installations.

Model Size (TR)	1.0	1.5	2.0	2.5	2.8	3.5	4.0
Unit Height (mm)	250	250	250	295	295	295	295

### **QUIET OPERATION**

Daikin ceiling concealed machines are designed to keep enclosed area super quiet. Enclosed areas air-conditioned by FDBF machines are quieter than libraries.

Model Size (TR)	Speed	1.0	1.5	2.0	2.5	2.8	3.5	4.0
Sound Level dBA	Н	36	39	43	43	42	42	49
	M	34	36	40	40	39	39	45
	L	32	34	38	38	36	36	43



20dBA





40dBA



60dBA



80dBA





**FEATURES** 

### NEW WIRED LCD REMOTE CONTROLLER

New LCD based wired type remote handset with alphabetic error display like HP, LP, SPPR, indoor fan current sensor etc. In-built energy saver dedicated button and glossy finish.



### HIGH PERFORMANCE EVEN AT HIGH

### AMBIENT TEMPERATURE

Always keeping your comfort in mind, Daikin ducted air conditioners work at high ambient temperature (48°C) without tripping. Get the best out of Daikin ducted air conditioners even in hot weather conditions.



### **UNDER VOLTAGE AND OVER VOLTAGE PROTECTION**

Given the erratic electricity supply it becomes important that your air conditioners are guarded against under voltage and over voltage. Daikin ducted air conditioners offer protection against voltage fluctuation thus enhancing the operating life of your air conditioners.



### PHASE IMBALANCE VOLTAGE

It is vital that your air conditioner is protected against imbalance and Daikin duct air conditioners offer this protection to ensure reliable operation of the air conditioner.

Electrical equipment especially motors and their controllers will not operate reliably on unbalanced voltages. Greater imbalances may cause overheating of components and damage the air conditioners.



### PHASE LOSS PROTECTION


In case of any phase loss Daikin machine will display error on its controller.

### COMFORT


### SUPERIOR AIR DISTRIBUTION FOR COMFORTABLE LIVING

The conditioned air can be effectively distributed to every corner of the room through the ducting and this ensures a pleasant environment for comfortable living.










**LONG ROOM** 



### **OUTDOOR UNIT COMPACT DESIGN**

### Phase reversal could cause serious problems therefore much care is required to protect the motor from such type of fault. Daikin duct


air conditioners offer protection from phase reversal thus enhancing the life of the air conditioners.



### PRE-CHARGED REFRIGERANT

PHASE REVERSE PROTECTION

FDMR36ERV16 model is available with pre-charged refrigerant for 7.5 meter piping length. No need for additional refrigerant charge on-site if piping length is upto 7.5 meters.



410mm

# APPLICATION OF THE PRODUCT




### RETAIL

Versatility and control are the keys to create a comfortable condition within trading areas and changing rooms that will keep customers shopping. It's important to select a system that offers excellent performance, while minimising operating costs and energy consumption.




# OFFICES / BANKS

The challenge for an office or bank is the ability to effectively heat or cool open plan areas as well as meeting rooms. Cooling a meeting room when it is empty will mean running costs mount up unnecessarily. Conditions within open-plan areas are important for staff comfort levels.

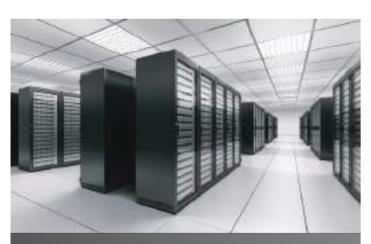

# IT & SERVER ROOMS

Computer systems run round the clock and require a controlled temperature environment to operate effectively. Equipment in these rooms can generate a lot of heat and not removing the heat effectively can cause computer servers to malfunction. Downtime from inoperable servers can mean business loss and productivity.

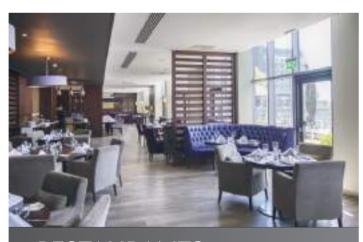

### **RESTAURANTS**

Guests expect a perfect atmosphere, including comfortable conditions. Heat generated from lighting, the kitchen area and the dining area can all contribute to make restaurants uncomfortable with inadequate air-conditioning. Air-conditioning needs to be discreet and flexible to meet the demands of your restaurant and customers.



# **FVRN & FVQN SERIES**

Cooling Only & Heat Pump

R-410A



An ideal way of saving space with style and functionality, with its ease of installation. It is suited to be installed in offices, commercial shops, restaurants and showrooms.





**QUIET MODE** 



WITH WIRELESS






DRY MOD

WASHABLE SARANET FILTER

FVRN71~140 (cooling only)	8.3KW ~ 16.1 KW	COOLING
FVQN100 ~ 140 (HEAT PUMP)	11.7KW ~ 16.1 KW	COOLING
TVQTTOO ~ TTO (HEAT FOMP)	11.7KW ~ 16.0 KW	HEATING

### **ACCESSORY REQUIRED FOR INDOOR UNIT**

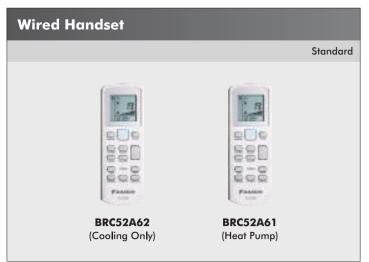




### COMFORT

### FLOOR STANDING AIR FLOW


The floor standing is able to achieve air flow distance up to 25m\*



"Note: Based on size 140

### TURBO MODE


Once it is activated the air-conditioner will run on full power with the indoor fan running at maximum speed for 20 minutes. This enables the set temperature to be achieved faster.

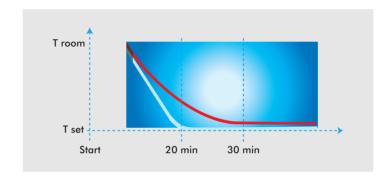

### AUTO RANDOM RESTART WITH LAST-STATE-MEMORY

In the event of a sudden power failure during operation, the floor standing restarts automatically in 64 different recovery timing patterns (within 180 seconds to 244 seconds) and it will operate based on the previous settings (operating mode, temperature setting and fan speed). This ensures that air-conditioners in the same building resume randomly instead of all units resuming at the same time, preventing power surge after a blackout.



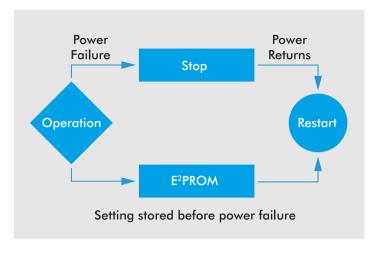

### **WORK & SERVICING**

# LOCATION OF CONDENSATE WATER DRAIN PUMP

\* Condensate water drain pump is optional, separately purchased and field installed.



Piping Floor Standing Type

### CONTROLLERS


The floor standing unit can be controlled by following methods:

- a) Settings by pressing the control panel on the unit.
- b) Settings by using the wireless controller (wireless controller comes as standard
- c) Settings by wired remote controller (optional))

### FLOOR STANDING CONTROL PANEL

A stylish black control panel with white LED light for crisp clear display.




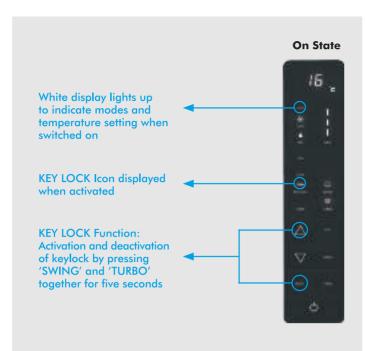

### **AIR FLOW**

# AUTO SWING Left and right auto swing to cool the corners of the room.



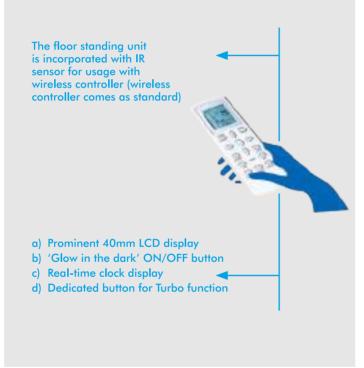




### OTHERS

- SPACE IN THE UNIT BELOW THE FAN ABLE TO ACCOMMODATE DRAIN PUMP, DEPENDING ON DRAIN PUMP SIZE (DRAIN PUMP IS OPTIONAL, SEPARATELY PURCHASED AND FIELD INSTALLED)
- LARGE BUTTONS ON CONTROL PANEL FOR EASE OF USE
- ERROR CODE DISPLAY ON THE SEVEN-SEGMENT OF THE CONTROL PANEL INDICATES BY BLINKING
- KEY LOCK FOR PREVENTION OF SETTING CHANGE BY UNAUTHORISED PERSONNEL

### COMFORT

### NEW COMFORTABLE AIRFLOW CONTROL


Left and Right Directions (By Remote Controller)
 Auto swing direction is selectable from three patterns to suit the layout of the room.

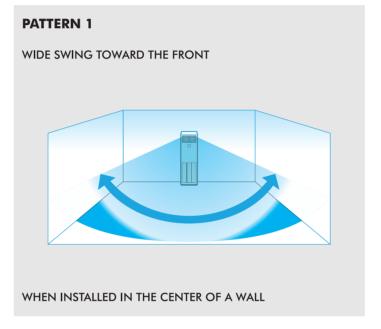


# PATTERN 2 SWING ON THE LEFT SIDE

Up and Down Directions (By Hand)
 Independent up and down airflow directions facilitate even room temperature and help save energy.

WHEN INSTALLED IN THE CORNER OF A ROOM

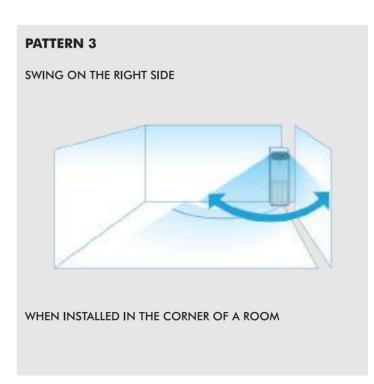


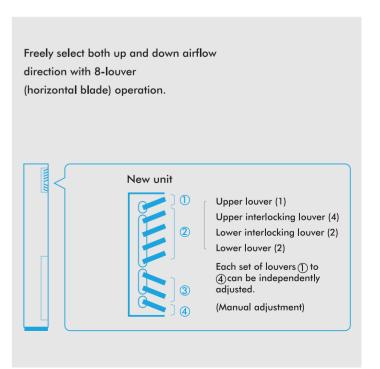

### **Example applications**


### When cooling

Turning louvers (1) and (2) upward and turning (3) and (4) horizontal will reduce uneven room temperature.

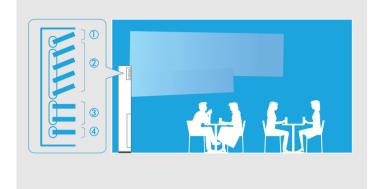

### When heating

Leaving louvers ① and ② horizontal and turning ③ and ④ downward will reduce uneven room temperature.

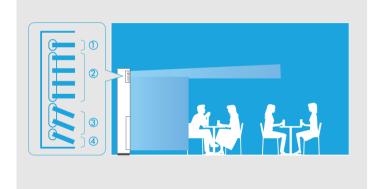

### COMFORTABLE FAN SPEED CONTROL

### • HIGH FAN SPEED MODE (ONLY FVQ 100)

To carry airflow to the far side of the room, airflow rate can be increased 5% or 10% depending on the installation condition or customer's request (Field setting by remote controller).

### SWITCHABLE FAN SPEED: HIGH/MIDDLE/LOW

### PROGRAMME 'DRY'

Dehumidification is micro-processor controlled to prevent abrupt and uncomfortable changes in air temperature.

### ENERGY SAVING

A DC fan motor improves efficiency.

### **Benefit**

It saves power; ideal for long usage



### QUIET OPERATION



			dBA
INDOOR UNIT	HIGH	MIDDLE	LOW
100 C	50	47	44
125 C	51	48	46
140 C	53	51	48

Note: Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to

### QUICK AND EASY INSTALLATION AND MAINTENANCE

### **WORK & SERVICING**

### LIGHTWEIGHT INDOOR UNIT

Enables smooth transport and installation of the indoor unit.

INDOOR UNIT	100 C	125 C	140 C
WEIGHT	47	47	47

### LONG-LIFE FILTER LASTS ABOUT 1 YEAR\*, MAINTENANCE **NOT REQUIRED**

\*For dust concentration of 0.15 Mg/M

### • EMPLOYS A SAFETY LOCK FUNCTION OF SUCTION GRILLE The grille will not open even upon impact.

 EASIER CONNECTION WITH THE CENTRALISED **CONTROL SYSTEM** 

# CONTROLLERS

Easy-to-read LCD remote controller allows various system control configurations and can control multiple indoor units.

Remote controller options are shown on the page introducing each indoor unit model.

### **NAVIGATION REMOTE CONTROLLER** (Wired LCD Remote Controller)



BRC1E63

This simple, modern designed remote controller with fresh white colour matches your interior design. Operation is much easier and smoother, just follow the indications on the navigation remote controller.

### **ENERGY SAVING**


### NEW Setpoint auto reset

- · Even if the set temperature is changed, the new set temperature returns to the previous preset value after a preset duration of time.
- Period selectable from 30, 60, 90, or 120 min.

### Restaurant example



Temperature is set to 27°C



Then is lowered to 24°C for crowded room

Returns to

automatically

### After 30 minutes



Automatically returns to preset temperature (27°C)


\*Preset-return time can be set at 30, 60, 90, or 120 min

### **OFF** timer (programmed)

- · Sets and saves setting for an increment of time that automatically turns OFF air conditioner after a preset period of time for each time operation starts.
- Period can be preset from 30 to 180 minutes in 10-minute increments.

### Setpoint range set

- Saves energy by limiting the min. and max. set temperature.
- · Avoids excessive heating or cooling.
- This function is convenient if the remote controller is installed where anyone can change the settings.



### CONVENIENCE

### 5-step airflow control (BRC1E63 only)

### **Energy consumption monitoring**\*1,2,3,4

• Past power consumption for the current and previous days (2-hour intervals), week (1-day intervals), and year (1-month intervals) can be checked.

- \*1 Availability of this function may vary according to model (limited to partial
- \*2 Time setting is necessary.
- \*3 This function cannot be used during group control.
- \*4 This is a reference value for comparison and is not intended as a value for investigation purposes in the calculation of electricity bills or contract for electricity. Because it is a simple calculation of power consumption, there are cases when the calculated value differs with the measurement results

### Setback (default: OFF)


• Maintains the room temperature in a specific range during unoccupied periods by temporarily starting an air conditioner that had been turned OFF.

### Weekly schedule

- 5 actions per day can be scheduled for each day of the week.
- The holiday function will disable schedule timer for the days that have been set as holiday.

### **CONTROLLERS (Contd.)**

• 3 independent schedules can be set. (e.g. summer, winter, mid-season)



### NEW Auto display off (BRC1E63 only)

### Energy consumption monitoring \*1,2,3,4

- · While operation is stopping, LCD display can be turned OFF. It will be displayed again if any button is pressed.
- Period can be preset from 10, 30, 60 minutes, and OFF. Initial setting is 30 minutes.


### WIRELESS LCD REMOTE CONTROLLER

NEW	Signal receiver unit is additional	Cooling Only
M. 1	R/F Cassette	BRC7M632F-6
at 25	NRF Cassette	BRC7M632F-6
166	1-Way Cassette	BRC4M61-6
	2X2 Cassette	BRC7M630W-6
-		745
3RC4M150	DW16	

- The wireless remote controller is supplied in a set with a
- Signal receiver unit of installed type is contained inside decoration panel or indoor unit.
- · Shape of signal receiver unit differs according to the indoor unit.

Note: The signal receiver unit shown in the photograph is for mounting inside the decoration panel of the ceiling mounted cassette type.

· Backlight LCD of new wireless remote controller



Pressing the backlight button helps operating in dark rooms.

### Wired remote controller has built-in temperature-

Enables temperature sensing closer to target area for improved comfort. (When using a remote control from another room, temperature-sensor of the indoor unit air inlet must be selected.)

### Facilitates maintenance and repair

• All initial settings can be set from the remote controller. After interior construction is complete, ceiling mounted cassette type can be remotely set without having to use a stepladder to access for manual setting.

**Setting contents:** High ceiling use, air direction, filter type, address for centralised control (group control address is set automatically).

· Remote controller is equipped with model name and failure display functions. This facilitates service in the unlikely event of a malfunction.

(Model name display function applies to BRC1E62/63 only.)

SkyAir shares common control with Heat Reclaim Ventilator and the other Daikin air-conditioning units, thus simplifying interlocking operations.

Easily adaptable to large-scale, high-function, centralised remote control systems.

Installing and connecting control wiring between SkyAir and other Daikin air-conditioning equipment is easy.

### LCD panel shows operating status in letters, numbers, and motion.

Airflow / swing display	Displays auto-swing operating status and setting position of air discharge angle.
Preset temperature/ operation mode display	Displays preset room temperature and operating status (fan, dry and cool).
Programming time display	Operation start and stop time can be set for individual timers up to 72 hours. The LCD also shows when it is time to clean the filter, when changeover is under centralised control, and ventilation/cleaning.
Self-diagnosis function	Monitors operating status within the system covering 40 items, and displays a message to indicate as soon as a malfunction occurs.

### Interface adaptor for SkyAir series

### DTA112BA51 (Option)

Enables centralised control via connection to a high-speed, DIII-NET communication system, adopted for the Daikin VRV system.

Necessary for interface adaptor for SkyAir series with the central remote control

The interface adaptor for SkyAir series is required for Compact multi flow cassette type (FFF).

### STYLISH REMOTE CONTROLLER (OPTION) - MADOKA







BRC1H61K (Black)

# A complete redesigned controller focused to enhance user experience

reddot design award



'Scan Me'

BRC1H61W (White)

### **Product Features**

- · Combines refinement and simplicity
- Echoes the distinct blue circle and simplicity of design
- Two attractive colours to match any interior
- Compact, measures only 85 x 85 mm

### **User-friendly interface**

- Just three buttons and a large-figure display
- Customisable display
- Direct access to basic functions (ON/OFF, Operation mode, temperature setting, Airflow rate and Airflow direction)









Fan speed

### **EASY SETTING VIA BLUETOOTH APP WITH SMARTPHONE** (For Installer / Facility manager)

### Keep hotel room comfortable

· Improved setback function by setting the lower temperature limit in cooling mode.

### Shorter installation time

- · Easy to create multiple remote control and field settings via App
- · Prepare a setting in advance at the office and immediately send it to the on-site remote controller
- Save and reuse settings









Louvre setting

< App screen image >

Mode selection (cooling, fan only, etc.)

### TECHNICAL SPECIFICATIONS 5 STAR INVERTER CASSETTE AC (FCMF-SERIES)



Nominal Capacity			TR	1.5	2	2.5	3	3.5	3.5	4	4
Model Name	Indoor Un	it		FCMF50ARV169	FCMF71ARV169	FCMF90ARV169	FCMF100ARV169	FCMF125ARV169	FCMF125ARV16	FCMF140ARV169	FCMF140ARV16
model Humo	Outdoor U	nit		RZMF50BRV169	RZMF71BRV169	RZMF90BRV169	RZMF100BRV169	RZMF125BRV169	RZMF125BRY169	RZMF140BRV169	RZMF140BRY169
	Wireless	eless Optional BRC91A152									
Remote	Signal Receiver Unit -Model Number	Signal Receiver Unit -Model Number BRC7M632F-6									
	Wired	Optional					BRC	1E63			
Panel Code	With Sensing					BYCQ1	25EEF6				
Power supply			230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	400V/50Hz/3ph	230V/50Hz/1ph	400V/50Hz/3ph	
Cooling Capacity -Rated (min~max)			kW	5.27 (3.2~5.6)	7.1 (3.2~8.0)	9.0 (4.5~10.1)	10.51 (5.0 ~11.2)	12.5 (5.7~14.0)	12.5 (5.7~14.0)	14.0 (6.2~15.5)	14.0 (6.2~15.5)
Power Consumption	Cooling-Rated kV		kW	1.36	1.92	2.42	3.1	4.26	4.08	4.95	4.95
Annual Power Consumption	kWh		kWh	842.77	1133.54	1436.16	2057.73	2513.48	2513.48	2886.34	2852.03
ISEER			Wh/Wh	5.2/5	5.2/5	5.1/5	4.51/5	4.10/5	4.15/5	4.10	4.10
	Colour		'				Galvanized Ste	el Coated Color			
	Air Flow Rate (H/HM/M/ML/L)  dm		23/21/18	.5/16/13.5	34.5/31/	27.5/24/20		36.5/33	/29/25/21		
			cfm	812/742/6	53/565/477	1218/1095/971/848/706			1288/1165/1024/883/742		
Indoor Unit	Sound Level (H/HM/M/ML/L) dBA			37/34.5/32/29.5/27.5 45/41.5/38/35/32.5 46/43/40/36/32.5							
D	D:(U-W-D)	Dimensions (HxWxD)		256x8	56x840x840 298x840x840						
	Dimensions (nxwxD)	mm	50x950x950								
	Machine Weight	Unit	kg	:	22			:	25		
	madillo rroigill	Panel	kg			5.5					
	Colour						Ivory	White			
	Compressor	Туре					Hermetically Se	aled Swing Type			
	Compressor	Motor Output	kW	1.3	1.3	1.6	1.6	2.4	2.4	2.4	2.4
	Refrigerant						R	-32			
Outdoor Unit	Refrigerant Charge		kg	1.09	1.3	2.8	2.8	3.1	3.1	3.1	3.1
	Sound Level	Cooling	dBA	48	50	51	51	55	55	55	55
	Dimensions (HxWxD)		mm	595x845x300	595x845x300	990x940x320	990x940x320	990x940x320	990x940x320	990x940x320	990x940x320
	Machine Weight		kg	36.5	40	57	57	69	69	71	71
	Certified Operation Range		°CDB				21	~52			
	Liquid (Flare)		mm				9	52			
Piping Connections	Gas (Flare)		mm				15	.88			
	Drain		mm				Dia 26	(Hole)			
Max. Interunit Piping Length			m	30	30	50	50	50	50	50	50
Max. Installation Level Difference			m	20	20	30	30	30	30	30	30

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power.

### TECHNICAL SPECIFICATIONS 4 STAR INVERTER CASSETTE AC (FCVF-SERIES)



Nominal Capacity			TR	1.5	2	2.5	3	3.5	3.5	4	4	
Model Name	Indoor Unit			FCVF50ARV169	FCVF71ARV169	FCVF90ARV169	FCVF100ARV169	FCVF125ARV169	FCVF125ARV16	FCVF140ARV169	FCVF140ARV16	
model Nulle	Outdoor Un	it		RZVF50BRV169	RZVF71BRV169	RZVF90BRV169	RZVF100BRV169	RZVF125BRV169	RZVF125BRY169	RZVF140BRV169	RZVF140BRY16	
	Wireless	Optional		BRC91A152								
Remote	Signal Receiver Unit -Model Number			BRC7M632F-6								
	Wired	Optional					BRO	T1E63				
Panel Code	Without Sensing						BYCQ1	25EAF6				
Power Supply				230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	230V/50Hz/1ph	400V/50Hz/3ph	230V/50Hz/1ph	400V/50Hz/3pl	
Cooling Capacity -Rated (min~max)			kW	5.27 (3.2~5.6)	7.1 (3.2~8.0)	9.0 (4.5~10.1)	10.51 (5.0~11.2)	12.5 (5.7~14.0)	12.5 (5.7~14.0)	14.0 (6.2~15.5)	14.0 (6.2~15.5	
Power Consumption	Cooling-Rated		kW	1.45	2.01	2.51	3.26	4.45	4.45	5.25	5.12	
Annual Power Consumption			kWh	842.77	1133.54	1436.16	2057.73	2513.48	2513.48	2886.34	2852.03	
ISEER			Wh/Wh	4.85/4	4.85/4	4.85/4	3.95/4	3.85/4	3.85/4	3.75/4	3.80/4	
Colour							Galvanized Ste	el Coated Color				
	Air Flow Rate (H/HM/M/ML/L)  dm		23/21/18	.5/16/13.5	34.5/31/	27.5/24/20		36.5/33/29/25/21				
			cfm	812/742/6	53/565/477	1218/1095/971/848/706			1288/1165/1024/883/742			
Indoor Unit	Sound level (H/HM/M/ML/L) dBA			37/34.5/32/29.5/27.5 45/41.5/38/35/32.5 46/43/40/36/32.5								
1	Dimensions (HxWxD)		mm	256x840x840 298x840x840								
	Dillielisiolis (uxwxD)	Panel	mm	50x950x950								
	Machine weight	Unit	kg	22 25								
	macinio noigin	Panel	kg			5.5						
	Colour						Ivory	White				
	Compressor	Туре		Hermetically Sealed Swing Type								
	Compressor	Motor output	kW	1.3	1.3	1.6	1.6	2.4	2.4	2.4	2.4	
	Refrigerant					R	-32					
Outdoor Unit	Refrigerant Charge		kg	1.09	1.3	2.8	2.8	3.1	3.1	3.1	3.1	
	Sound Level	Cooling	dBA	48	50	51	51	55	55	55	55	
	Dimensions (HxWxD)		mm	595x845x300	595x845x300	990x940x320	990x940x320	990x940x320	990x940x320	990x940x320	990x940x320	
	Machine Weight		kg	36.5	40	57	57	69	69	69	69	
	Certified Operation Range		°CDB				21	~52				
	Liquid (Flare)		mm				9	.52				
Piping Connections	Gas (Flare)		mm				15	5.88				
	Drain		mm				Dia 20	6 (Hole)				
Max. Interunit Piping Length			m	30	30	50	50	50	50	50	50	
Max. Installation Level Difference			m	20	20	30	30	30	30	30	30	

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power.

### TECHNICAL SPECIFICATIONS 3 STAR INVERTER 1 WAY CASSETTE AC (FKCAQ-SERIES) (R-32)



Nominal Capacity		kW	_	5	7		
		Indoor Unit		FKCAQ50AV16	FKCAQ71AV16		
Model Name		Outdoor Unit		RZVFQ50ARV16	RZVFQ71ARV16		
	Power supply			230V/50Hz/1ph	230V/50Hz/1ph		
	Cooling capacity -Rated	f /Half(min ~max)	kW	5.0/2.5 (1.8 ~5)	7/3.5 (2.06~7)		
Unit	Power consumption		kW	1.65	2.32		
	Annual Power Consum	ption	kWh	943	1338		
	ISEER / Stars			4.10/ 3*	4.05 / 3*		
	Indoor Unit Color			Galvanized :	Steel Coated		
			m³/min	12.3/11.6/10.7/10.3/9.8	18/16.6/15.3/13.9/12.5		
	Airflow rate		cfm	436/410/379/364/348	635/587/540/491/443		
Indoor Unit	Sound level		dBA	38/36/35/34/33	48/46/44/42/40		
	Dimensions (HxWxD)		mm	145 x 12	110 x 523		
	Machine weight		kg	2	0		
	Drain		mm	Ø26 Hole			
	Colour			lvory	White		
	Compressor	Туре		Hermetically Se	aled Swing Type		
		Motor output	kW	1	.3		
	Refrigerant			R-	32		
Outdoor Unit	Refrigerant charge		kg	0.98	1.04		
oblacor offi	Sound level (Cooling)		dBA	54	54		
	Dimensions (HxWxD)		mm	595 x 8	45 x 300		
	Machine weight		kg	31	39		
	Certified operation ran	ge	°CDB	21 -	~ 52		
Deco.	Model Name			BYKQ63AHW, BYKC	163AHS, BYKQ63AW		
				BYKQ63AHW - Surface Color: White & Bas	e Color: Dark Grey		
	Color			BYKQ63AHS - Surface Color: Silver & Base	Color: Dark Grey		
Panel				BYKQ63AW - Surface Color: White & Base	Color: White		
	Dimensions (HxWxD)		mm	41 x 13	90 x 595		
	Weight		kg	6	.6		
		Liquid (Flare)	mm	6.35	6.35		
Piping connections		Gas (Flare)	mm	12.7	15.9		
Max. interunit piping length			m	20	20		
Max. installation level difference			m	20	20		

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power.

### TECHNICAL SPECIFICATIONS 3 STAR INVERTER 3x3 CASSETTE AC (FCVFQ-SERIES)





Nominal Capacity		TR	1.5		2.5		3.5	
Mode <b>l</b> Name	Indoor Unit		FCVFQ50AV16	FCVFQ71AV16	FCVFQ90AV16	FCVFQ100AV16	FCVFQ125AV16	FCVFQ140AV1
Nouel Nulle	Outdoor Unit		RZVFQ50AV16	RZVFQ71AV16	RZVFQ90AV16	RZVFQ100AV16	RZVFQ125AY16	RZVFQ140AY1
	Wireless(Optional)	Model No.		1	BRC9	1A152	'	
Remote Control	Wileless(obilolial)	model No.			BRC7 <i>N</i>	632F-6		
	Wired(Optional)				BRC	1E63		
Decorative Panel	Model Name				BYCQ125EAF	6 (Non Sensi)		
	Rated Cooling Capacity	kW	5.3	7.1	9	10.5	12.5	14
	Min~Max Capacity	kW	1.8~5.3	2.2~7.1	4.5~10.1	5.0~10.5	5.7~14.0	6.2~15.5
	Rated Power Input	Watt	1420	2350	2820	3430	4600	5480
	ISEER	Wh/Wh	3.99	3.99	3.99	3.66	3.66	3.66
Performance	Annual Power Consumption	kWh	1022.39	1378.89	1745.56	2221.32	2652.48	2971.47
	BEE Star Rating	Star			3-9	itar		
	Operating Range	IDU (DB)°C			19-	~35		
	Operating range	ODU (DB)°C			19-	~50		
	Power Supply	V/Hz/ph		230V/50	OHz/1ph		400V/5	OHz/3ph
	Refrigerant				R-	32		
	Casing Size	HxWxD (mm)	256x8	40x840		298x8	40x840	
	Casing Color				Galvanized	Steel Coated		
	Air Flow Rate (Hi)	cfm (H/HM/ M/ML/L)	812/741/6	53/565/476	1218/1095/	972/848/707	1288/1165/1	025/883/742
	Fan Speed	Nos				5	I.	
	Sound Pressure Level	dBA (H/HM/ M/ML/L)	39/37/3	34/32/30	47/43.5/4	0/37/34.5	48/45/42	2/38/34.5
Indoor Unit	Unit Weight	kg		22			25	
	Liquid Piping Dia.	mm	6.35	6.35		9.	.52	
	Gas Piping Dia.	mm	12.7	15.8		15	i.88	
	Max Total Pipe Length	mtr.	2	20	30	30	30	30
	Chargeless Pipe Length	mtr.	1	10	10	10	10	10
	Standard Pipe Length	mtr.	7	'.5	7	.5	7	.5
	Max. Level Difference	mtr.	1	15	20	20	20	20
	Drain	mm	Dia 26	(Hole)	Dia 26	(Hole)	Dia 26	(Hole)
(Fresh White)	Size	HxWxD (mm)			50x95	0x950	I	
Panel	Weight	kg			5	.5		
	ODU Shape				Side Di	scharge		
	ODU Qty.	Nos.				1		
	Casing Size	HxWxD (mm)	595x8	45x300	695x9	30x350	990x9	40x320
	Sound Pressure Level	dBA	Į.	52	52	52	55/57	55/57
Outdoor Unit	Compressor	Type/Qty-Nos.			Swing Cor	npressor/1		
	НЕ Туре				FTHX Te			
	Precharge & Service Valve				Υ	es		
	Installation Kit					lo		
	Weight(Approx)	kg	32	40	48/44	48/44	68/62	68/62

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power.

# TECHNICAL SPECIFICATIONS 3 STAR INVERTER 3x3 CASSETTE AC (FCFQ-SERIES WITH "KATAI" TECHNOLOGY)



Nominal Capacity		TR	1.5	2	2.5	3	3.5	4	
	Indoor Unit		FCFQ50AV16	FCFQ71AV16	FCFQ90AV16	FCFQ100AV16	FCFQ125AV16	FCFQ140AV16	
Model Name	Outdoor Unit		RZFQ50AV16	RZFQ71AV16	RZFQ90AV16	RZFQ100AV16	RZFQ125AY16	RZFQ140AY16	
					BRC9	1A152			
Remote Control	Wireless(Optional)	Model No.			BRC7N	1632F-6			
	Wired(Optional)				BRC	1E63			
Decorative Panel	Model Name				BYCQ125EAF	6 (Non Sensi)			
	Rated Cooling Capacity	kW	5.3	7.1	9	10.5	12.5	14	
	Min~Max Capacity	kW	1.8~5.3	2.2~7.1	4.5~10.1	5.0~10.5	5.7~14.0	6.2~14.0/6.2~15.5	
	Rated Power Input	kW	1420	2350	2820	3430	4600/4450	5480/5250	
	ISEER	Wh/Wh	3.99	3.99	3.99	3.66	3.66/3.65	3.66/3.65	
Performance	Annual Power Consumption	kWh	1022.39	1378.89	1745.56	2221.32	2652.48	2971.47	
	BEE Star Rating	Star			3-	Star	<u> </u>		
		IDU (DB)°C			19-	~35			
	Operating Range	ODU (DB)°C			19-	~50			
	Power Supply V/Hz/p			230V/50	OHz/1ph		400V/5	50Hz/3ph	
	Refrigerant				R	-32	I		
	Casing Size HxWxD (		256x8	40x840	298x840x840				
	Casing Color				Galvanized	Steel Coated			
	Air Flow Rate (Hi) cfm (H/HM/ M/ML/L)		812/741/653/565/476		1218/1095/972/848/707		1288/1165/	1025/883/742	
	Fan Speed	Nos			l	5	<u> </u>		
	Sound Pressure Level	dBA (H/HM/ M/ML/L)	39/37/3	34/32/30	47/43.5/4	10/37/34.5	48/45/4	12/38/34.5	
Indoor Unit	Unit Weight	kg	2	22		2	25		
	Liquid Piping Dia.	mm	6.35	6.35		9.	52		
	Gas Piping Dia.	mm	12.7	15.8		15	.88		
	Max Total Pipe Length	mtr.	2	20	30/50 30/50		30/50 30/50		
	Chargeless Pipe Length	mtr.	1	10	10 10		10	10	
	Standard Pipe Length	mtr.	7	'.5	7	'.5		7.5	
	Max. Level Difference	mtr.	1	15	20/30	20/30	20/30	20/30	
	Drain	mm	Dia 26	(Hole)	Dia 26	(Hole)	Dia 2	6 (Hole)	
(Fresh White)	Size	HxWxD (mm)			50x95	50x950			
Panel	Weight	kg			5	.5			
	ODU Shape				Side D	ischarge			
	ODU Qty.	Nos.				1			
	Casing Size	HxWxD (mm)	595x8	45x300	695x9	30x350	990x	940x320	
	Sound Pressure Level	dBA	5	52	52	52	55/57	55/57	
Outdoor Unit	Compressor	Type/Qty-Nos.			Swing Co	mpressor/1			
	НЕ Туре				KATAIT	echnology			
	Precharge & Service Valve				Y	es			
	Installation Kit				1	lo			
	Weight(Approx)	kg	32	40	48/44	48/44	68/62	68/62	

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power.

### TECHNICAL SPECIFICATIONS 2 STAR 3x3 CASSETTE AC (FCQF-SERIES FIXED SPEED)



Nominal Capacity			TR	1.5	2.0	2.5	3.0	3.5	4.0				
Model Name	Indoor Unit			FCQF18ARV16	FCQF24ARV16	FCQF30ARV16	FCQF36ARV16	FCQF42ARV16	FCQF48ARV16				
model Maille	Outdoor Unit			RGVF18ASV16	RGVF24ASV16	RGVF30ASV16	RGVF36ASV16	RGVF42BSY16	RGVF48BSY16				
	Wireless	Optional				ARC9	1A151						
Remote	Wired	Optional				3P654629-	1(BRC1F91)						
Panel Code	Model Number				BYCQ48EAF6								
Star Rating				2	2	2	2	2	2				
			Indoor Unit	1 Phase, 230 V, 50 Hz	1 Phase, 230 V, 50 Hz								
Power Supply			Outdoor Unit	1 Phase, 230 V, 50 Hz	3 Phase, 230 V, 50 Hz	3 Phase, 230 V, 50 Hz							
Cooling Capacity -Rated			kW	5.30	7.03	8.79	10.51	12.31	13.36				
Power Consumption	Cooling-Rated		Watt	1452	1926	2410	3140	3910	4200				
Annual Power Consumption	Cooling-Rated		kWh	1124	1490.93	1865.6	2428.37	3024.44	NA				
ISEER			Wh/Wh	3.65	3.65	3.65	3.35	3.15	3.26				
	to the pro- // manufacture of		m³/min	23/21/18.5/16/13.5	23/21/18.5/16/13.5	34.5/31/27.5/24/20	34.5/31/27.5/24/20	36.5/33/29/25/21	36.5/33/29/25/21				
	Air Flow Rate (H/HM/M/ML/L)	All How Rule (HythnymymLyL)		812/742/653/565/477	812/742/653/565/477	1218/1095/971/848/706	1218/1095/971/848/706	1288/1165/1024/882/742	1288/1165/1024/882/742				
	Sound Level (H/L)		dBA	37/34.5/32/29.5/27.5	37/34.5/32/29.5/27.5	45/41.5/38/35/32.5	45/41.5/38/35/32.5	45/41.5/38/35/32.5	46/43/40/36/32.5				
Indoor Unit	Dimensions Unit (HxWxD)		mm	256x840x840	256x840x840	298x840x840	298x840x840	298x840x840	298x840x840				
	Dimensions Panel (HxWxD)		mm	50x950x950	50x950x950	50x950x950	50x950x950	50x950x950	50x950x950				
	Machine Weight		kg	22	22	25	25	25	25				
	Panel Weight		kg	5.5	5.5	5.5	5.5	5.5	5.5				
	Compressor	Туре		Rotary	Rotary	Rotary	Rotary	Scroll	Scroll				
	Compressor	Motor Output	kW	1.3	1.3	1.6	1.6	1.6	2.4				
	Refrigerant Name			R-32	R-32	R-32	R-32	R-32	R-32				
Outdoor Unit	Sound Level	Cooling	dBA	56	56	58	58	58	60				
	Dimensions (HxWxD)		mm	595x845x300	595x845x300	990x940x320	990x940x320	990x940x320	990x940x320				
	Machine Weight		kg	40	46.5	68	71	74	74				
	Certified Operation Range		°CDB	19 to 48	19 to 48								
Piping Connections	Liquid (Flare)		mm	Ф6.35	Ф6.35	Ф9.5	Ф9.5	Ф9.5	Ф9.5				
1 iping connections	Gas (Flare)		mm	Ф12.7	Ф15.9	Ф15.9	Ф15.9	Ф15.9	Ф15.9				
Max. Interunit Piping Length			m	20	20	20	20	30	30				
Max. Installation Level Difference			m	10	10	10	10	15	15				

- 1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; Outdoor temp. 35°CDB. Equiv. refrigeration piping, 7.5m (horizontal).
- 2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.
- 3. Star rating is applicable for single phase units upto a rated cooling capacity of 10,465 Watts as defined by Bureau of Energy Efficiency, Ministry of Power.
- 4. Star Rating is now applicable under Voluntary phase for Three phase units above a rated capacity of 10,465 watts as defined by Bureau of Energy Efficiency, Ministry of Power .

# TECHNICAL SPECIFICATIONS INVERTER DUCTABLE AC (FDMF-SERIES) DUCT CONNECTION MIDDLE AND HIGH STATIC PRESSURE INVERTER TYPE (COOLING ONLY)



Model Name		Indoor Unit		FDMF50BRV16	FDMF71BRV16	FDMF90BRV16	FDMF100BRV16
model Name		Outdoor Unit		RZMF50BRV16	RZMF71BRV16	RZMF90BRV16	RZMF100BRV16
Power Supply	·			1 Phase, 220-240 V, 50 Hz			
Tonnage Range				1.5 TR	2 TR	2.5 TR	2.8 TR
Cooling Capacity-Rated (mi	ooling Capacity-Rated (min~max)		kW	5.2 (2.3-5.6)	7.1 (3.2-8.0)	9.0 (4.5-10.1)	10.5 (5.0-11.2)
Power Consumption	Cooling-Rated		kW	1.6	2.15	2.7	3.33
COP			Wh/Wh	3.25	3.30	3.33	3.15
	A: EL D. (U/M/I)		m³/min	18/15/12.5	23/19.5/16	32/27/22.5	32/27/22.5
	Air Flow Rate (H/M/L)		dm	635/530/441	812/689/565	1130/935/795	1130/935/795
Indoor Unit	Sound Level (H/L)		dBA	33/29/26	38/36/34	38/34/32	38/34/32
	Dimensions (HxWxD)		mm	300x1000x700	300x1000x700	300x1400x700	300x1400x700
	Machine Weight		kg	34	34	43	43
	Compressor			Hermetically Sealed Swing Type	Hermetically Sealed Swing Type	Hermetically Sealed Swing Type	Hermetically Sealed Swing Type
		Motor Output	kW	1.3	1.3	1.6	1.6
	Refrigerant			R-32	R-32	R-32	R-32
Outdoor Unit	Refrigerant Charge		kg	1.09(Charged For 15m)	1.3(Charged For 15m)	2.8(Charged For 30m)	2.8(Charged For 30m)
	Sound Level	Cooling	dBA	48	50	51	51
	Dimensions (HxWxD)		mm	595x845x300	595x845x300	990x940x320	990x940x320
	Machine Weight		kg	36.5	40	57	57
	Certified Operation Range		°CDB	19 to 48	19 to 48	19 to 48	19 to 48
	Liquid (Flare)		mm	09.5	Ø9.5	09.5	Ø9.5
Piping Connections	Gas (Flare)		mm	Ø15.9	Ø15.9	Ø15.9	Ø15.9
Tiping Connections	Drain Drain		mm	VP25 (I.D Ø25, O.D Ø32)			
Max. Interunit Piping Leng	th		m	Ref Piping Max Length -30	Ref Piping Max Length -30	50 (Equivalent length 70)	50 (Equivalent length 70)
Max. Installation Level Diff	erence		m	20	20	30	30

# DUCT CONNECTION MIDDLE AND HIGH STATIC PRESSURE INVERTER TYPE (COOLING ONLY)



Model Name	Indoor Unit FDMF125BRV16		FDMF140BRV16	FDMF125BRV16	FDMF140BRV16		
Model Nume		Outdoor Unit		RZMF125BRV16	RZMF140BRV16	RZMF125BRY16	RZMF140BRY16
Power Supply				1 Phase, 220-240 V, 50 Hz	1 Phase, 220-240 V, 50 Hz	IDU-1 Phase/ODU 3 Phase, 380-415 V, 50 Hz	IDU-1 Phase/ODU 3 Phase, 380-415 V, 50 Hz
Tonnage Range				3.5 TR	4 TR	3.5 TR	4 TR
Cooling Capacity-Rated (min-	~max)		kW	12.5(5.7-14.0)	14.0 (6.2-15.4)	12.5(5.7-14.0)	14.0 (6.2-15.4)
Power Consumption	Cooling-Rated		kW	4.7	6.1	4.4	5.7
COP			Wh/Wh	2.66	2.3	2.84	2.46
	Air Flow Rate (H/M/L)		m³/min	40/34/28	40/34/28	40/34/28	40/34/28
	AIT Flow Kale (H/M/L)		dm	1412/1200/989	1412/1200/989	1412/1200/989	1412/1200/989
Indoor Unit	Sound Level (H/L) dBA		dBA	42/39/35	42/39/35	42/39/35	42/39/35
	Dimensions (HxWxD) mm		mm	300x1400x700	300x1400x700	300x1400x700	300x1400x700
	Machine Weight		kg	45	45	45	45
	Compressor			Hermetically Sealed Swing Type	Hermetically Sealed Swing Type	Hermetically Sealed Swing Type	Hermetically Sealed Swing Type
		Motor Output	kW	2.4	2.4	2.4	2.4
	Refrigerant			R-32	R-32	R-32	R-32
Outdoor Unit	Refrigerant Charge		kg	3.1 (Charged For 30m)	3.1 (Charged For 30m)	3.1 (Charged For 30m)	3.1 (Charged For 30m)
	Sound Level	Cooling	dBA	55	55	55	55
	Dimensions (HxWxD)		mm	990x940x320	990x940x320	990x940x320	990x940x320
	Machine Weight		kg	69	69	69	69
	Certified Operation Range		°CDB	19 to 48	19 to 48	19 to 48	19 to 48
	Liquid (Flare)		mm	09.5	Ø9.5	Ø9.5	09.5
Piping Connections	Gas (Flare)		mm	Ø15.9	Ø15.9	Ø15.9	Ø15.9
phily confections	Drain		mm	VP25 (I.D Ø25, O.D Ø32)	VP25 (I.D Ø25, O.D Ø32)	VP25 (I.D Ø25, O.D Ø32)	VP25 (I.D Ø25, O.D Ø32)
Max. Interunit Piping Length			m	50 (Equivalent length 70)	50 (Equivalent length 70)	50 (Equivalent length 70)	50 (Equivalent length 70)
Max. Installation Level Differe	ence		m	30	30	30	30

Note: Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19°CWB; Outdoor temp. 35°CDB. Rated heating capacities are based on the following conditions: Indoor temp., 20°CDB; Outdoor temp., 7°CDB, 6°CWB. All unit are being tested and comply to ISO 5151 (Non-ducted unit)

### TECHNICAL SPECIFICATIONS INVERTER DUCTABLE AC (FDMFQ-SERIES)

**(INVERTER)** R-32

n IIN	Indoor Unit		FDMFQ50AV16	FDMFQ71AV16	FDMFQ90AV16	FDMFQ100AV16	FDMFQ125AV16	FDMFQ140AV16			
Model Name	Outdoor Unit		RZMFQ50AV16	RZMFQ71AV16	RZMFQ90AV16	RZMFQ100AV16	RZMFQ125AY16	RZMFQ140AY16			
	Nominal Capacity	TR	1.5	2	2.5	3	3.5	4			
	Rated Cooling Capacity	kW	5.3	7.1	9	10.5	12.5	14			
	Min~Max Capacity	kW	1.7~5.3	2.1~7.1	4.5~10.5	5.0~10.5	5.7~14.0	6.2~14.0			
	Rated Power Input	Watt	1600	2350	2900	3800	4600	5480			
Performance	COP	Wh/Wh	3.3	3.02	3.1	2.76	NA	NA			
	Operating Range	IDU (DB)°C			19-	~35					
	Operating Kange	ODU (DB)°C	19~50								
	Power supply	V/Hz/ph		230V/50	OHz/1ph		400V/5	OHz/3ph			
	Refrigerant				R-32						
	Casing Size	HxWxD (mm)	300x10	000x700	300x1400x700		400x700				
	Casing Color				Galvanized Steel Coated						
	Air Flow Rate (Hi)	dm/(H/M/L)	635/530/441	812/688/565	1100/950/790		400/12	200/980			
	External Static Pressure	Pa			5	50					
	Fan Speed	No				3					
	Sound Pressure Level		35/33/29	40/38/34	39/3	34/32	44/4	1/37			
Indoor Unit	Unit Weight	kg	:	34	4	13	4	15			
	Liquid Piping Dia.	mm	6.35	6.35	9.5		.52				
	Gas Piping Dia.	mm	12.7	15.8		15	5.88				
	Max Total Pipe Length	mtr.	2	20	30	30	30	30			
	Chargeless Pipe Length	mtr.	1	10	1	0	10				
	Standard Pipe Length	mtr.	7	7.5	7	.5	7	.5			
	Max. Level Difference	mtr.	İ	15	20	20	20	20			
	Drain	mm			Dia 25	(Hole)					
	Wireless (Optional)	Model No.			BRC4M	151W16					
Remote Control	- Throiss (opnoral)	Receiver Kit	BRC4M61-6								
	Wired (Optional)				BRC1E62/BRC1E63						
	ODU Shape				Side Di	ischarge					
	ODU Qty.	Nos.	Nos.								
	Casing Size	HxWxD (mm)	595x8	45x300	695x9	30x350	990x9	40x320			
	Sound Pressure Level	dBA		52	5	52	Į.	55			
Outdoor Unit	Compressor	Type/Qty-Nos.			Swing Con	npressor / 1					
	НЕ Туре		FTHX								
	Precharge & Service Valve				Υ	es					
	Installation Kit				N	lo					
	Weight(Approx)	kg	32	40	48	48	68	68			

Note: Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19°CWB; Outdoor temp. 35°CDB. Rated heating capacities are based on the following conditions: Indoor temp., 20°CDB; Outdoor temp., 7°CDB, 6°CWB. All unit are being tested and comply to ISO 5151 (Non-ducted unit)

### TECHNICAL SPECIFICATIONS FIXED SPEED DUCTABLE AC (FDBF/MF-SERIES)

CEILING CONCEALED TYPE (Cooling Only)

$\overline{}$	_	_	_	_		
n	ı		η	1	n	
m		٠.	5	i,	,	

			, •,,							
	Product Category	Unit		LSP Duct Series			MSP Du	ct Series		
	Nominal Capacity	TR	1.0	1.5	2.0	2.5	2.8	3.5	4.0	
	Rated Capacity	Watt	3516	5274	7032	8790	9845	12306	14064	
	Rated Power Input	Watt	1090	1740	2050	2710	3120	3950	4630	
Unit	EER/COP	w/w	3.23	3.03	3.43	3.24	3.16	3.12	3.04	
	BEE Star Applicable		NA	NA	NA	NA	NA	NA	NA	
	Operating Range	IDU (DB/WB)		19/14~35/24			19/14-	~35/24		
	Operating Kunge	ODU		19~48			19~	~48		
	Refrigerant			R-32		R-32				
	Model Name		FDBF12CRV16	FDBF18CRV16	FDBF24CRV16	FDMF30CRV16	FDMF36CRV16	FDMF42CRV16	FDMF48CRV16	
	Casing Size (HxWxD)	mm	250x8	80x605	250x1130x605		295x1430x665			
	Casing Color			Unpainted			Unpo	iinted		
	Power Supply	V/Hz/Ph		230V/50/1Ph		230V/	50/1Ph	415V/	50/3Ph	
Indoor Unit	Air Flow Rate	cfm/(H)	400	600	800	1000	1200	1400	1500	
	ESP	Pa		20		20	30	40	50	
	Fan Speed	No	3			3	3	3	3	
	Sound Pressure Level (Hi)	dBA	36	39	43	43	42	42	49	
	Remote Controller (With IDU)				Wired	d Туре				
	Unit Weight	kg	28	24	34	48	51	51	60	
	Model Name		RGF12CRV16	RGF18CRV16	RGF24CRV16	RGF30CRV16	RGF36CRV16	RGF42CRY16	RGF48CRY16	
	Casing Color				lvory	White				
	Casing Size (HxWxD)	mm	550x765x285	595x8	345x300	990x940x320				
	Power Supply	V/Hz/Ph		230V/50/1Ph		230V/	50/1Ph	415V/	50/3Ph	
	Max Total Pipe Length	mtr.		20		2	20	3	30	
	Max Vertical Pipe Length	mtr.		10		1	0	1	15	
	Std Pipe Length	mtr.		7.5			7.	5		
Outdoor Unit	Sound Pressure Level	dBA	51	54	56	58		63		
	Precharge & Service Valve	Yes/No		Yes			Y	es		
	Protection Device			Inbuilt Top Comp & Motor		Inbuilt Top (	omp & Motor	LP/HP/SF	PPR/UV/OV	
	Piping Size (mm)	Gas	12.7 15.9				15			
		Liquid	6.4				9.			
	Compressor Type	Туре		Rotary			tary		roll	
	Accumulator			Part of Compressor		Part of C	ompressor		lo .	
	HE Type/Coating	Туре		FTHX (Precoated)			FTHX (Pi			
	Weight (Approx)	kg	30	36	45	63	65	69	69	
	Installation Kit	Yes/No		No			N	0		

### TECHNICAL SPECIFICATIONS FIXED SPEED DUCTABLE AC HEATPUMP (FDMQN-SERIES)

CEILING CONCEALED TYPE (Heat Pump)



		17			
			100	125	140
Model Name		Indoor Unit	FDMQN100	FDMQN125	FDMQN140
		Outdoor Unit	RQ100DGXY16	RQ125DGXY16	RQ140DGXY16
Date of Condition Committee		Btu/h	39000	45000	55000
Rated Cooling Capacity		kW	11.43	13.19	16.12
Rated EER		w/w	2.82	2.87	3.01
Kuleu EEK		Btu/h	41000	47000	55000
Rated Heating Capacity	у	kW	12.02	13.77	16.12
Rated COP		w/w	3.25	3.41	3.41
	External Static Pressure (SH/H/M/L)	Pa	118/96/78/61	147/126/109/92	147/120/90/69
	Air Flow (SH/H/M/L)	dm	1280/1160/1050/920	1430/1320/1230/1130	1720/1550/1340/1170
Indoor Unit	Sound Pressure Level (SH/H/M/L)	dBA	52/49/47/45	54/53/52/51	54/52/50/46
	Height	mm	315	378	378
	Width	mm	1257	1299	1499
	Depth	mm	638	541	541
	Net Weight	kg	49	50	56
	Power Supply	V/Ph/Hz	380-415/3/50	380-415/3/50	380-415/3/50
	Sound Pressure Level	dBA	58	60	65
	Height	mm	852	852	852
Outdoor Unit	Width	mm	1030	1030	1030
Outdoor Ollii	Depth	mm	400	400	400
	Net Weight	kg	95	98	105
	Pipe Connection-Liquid	mm	9.52	9.52	9.52
	Pipe Connection-Gas	mm	15.88	15.88	19.05
Max. Allowable Length	1	m	45	45	35
Max. Allowable Elevati	ion	m	25	25	15

Note: Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19°CWB; Outdoor temp., 35°CDB. Rated heating capacities are based on the following conditions: Indoor temp., 20°CDB; Outdoor temp., 7°CDB, 6°CWB. All unit are being tested and comply to ISO 5151 (Non-ducted unit)

### TECHNICAL SPECIFICATIONS FIXED SPEED FLOOR STANDING AC (FVRN-SERIES COOLING ONLY)

FLOOR STANDING (Cooling Only)

R-410A

Model Name			Indoor Unit	FVRN71AXV16	FVRN100AXV16	FVRN125AXV16	FVRN140AXV16	
model Name			Outdoor Unit	RR71CGXY1A6	RR100DGXY16	RR125DGXY16	RR140DGXY16	
			Tonnage	2.4	3.3	3.8	4.6	
Nominal Cooling Capa	city		Btu/h	28500	40000	45000	55000	
			kW	8.35	11.72	13.19	16.12	
Nominal Total Input Po	ower (Cooling)		W	2750	4050	4750	5490	
Nominal Running Curr	rent (Cooling)		A	13	13 7.07 8.29			
Power Source			V/Ph/Hz		380-4	15/3/50		
Refrigerant Control (Ex	kpansion Device)				Outdoor Co	pillary Tube		
Refrigerant Type					R-4	10A		
		High		1035	1035	1035	1170	
	Air Flow	Medium	dm	945	945	935	1085	
	AIFFIOW	Low	am	845	845	835	985	
		Quiet		-	-	-	-	
		High		49	49	50	54	
Indoor Unit	Sound Pressure Level	Medium	dBA	47	47	48	53	
macor onn	Sound Pressure Level	Low	dBA	44	44	46	51	
		Quiet		-	-	-	-	
		Height	mm	1850	1850	1850	1850	
	Unit Dimension [Panel]	Width	mm	600	600	600	600	
		Depth	mm	350	350	350	350	
	Unit Weight [Panel]		kg	45	45	48	51	
		Height	mm	753	852	852	852	
	Unit Dimension	Width	mm	855	1030	1030	1030	
		Depth	mm	328	400	400	400	
Outdoor Unit	Unit Weight		kg	56	95	98	105	
		Туре			Flare	Valve		
	Pipe Connection	Liquid	mm		9	52		
		Gas	mm		15	.88	19.05	
Max Piping Length			m			15		
Max Piping Elevation			m			25		

### TECHNICAL SPECIFICATIONS FIXED SPEED FLOOR STANDING AC (FVQN-SERIES HEAT PUMP)

R-410A
--------

				100	125	140
Model Name		Indoor Unit Outdoor Unit		FVQN100AXV1	FVQN125AXV1	FVQN140AXV1
				RQ100DGXY1	RQ125DGXY1	RQ140DGXY1
Rated Cooling Capacity		Btu/h	40000	45000	55000	
		kW	11.72	13.19	16.12	
D			w/w		2.82	2.94
Rated EER		Btu/h	42000	46000	54500	
Rated Heating Capacity			kW	12.31	13.48	16
Rated COP			w/w	3.14	3.02	3.01
Indoor Unit	Power Supply		V/Ph/Hz	220-240/1/50		
	Air Flow		ďт	1035/945/845		1170/1085/985
	Sound Pressure Level		dBA	49/47/44	50/48/46	54/53/51
	Height		mm	1850		
	Width		mm	600		
	Depth		mm	350		
	Net Weight		kg	45	48	51
Outdoor Unit	Power Supply		V/Ph/Hz	380-415/3/50		
	Sound Pressure Level		dBA	58	60	65
	Height		mm		852	
	Width		mm		1030	
	Depth		mm		400	
	Net Weight		kg	95	98	105
	Pipe Connection - Liquid		mm		9.52	
	Pipe Connection - Gas		mm	15.88 19.05		19.05
Max. Allowable Length			m	45		40
Max. Allowable Elevation			m	25		20

Note: Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19°CWB; Outdoor temp. 35°CDB. Rated heating capacities are based on the following conditions: Indoor temp., 20°CDB; Outdoor temp., 7°CDB, 6°CWB. All unit are being tested and comply to ISO 5151 (Non-ducted unit)

1011 rollowing conditions: Indoor temp., 20 CDB; Outdoor temp., 7 CDB, 6 CWB. All unit are being tested and comply to ISO 3131 (Non-aucted unit)

### TECHNICAL SPECIFICATIONS FIXED SPEED DUCTABLE AC (FDMR)

R-410A

Model Name		Indoor Unit		FDMR36ERV16
		Outdoor Unit		RR36ERV16
N . 16 %		TD	Btu/h	36000
Nominal Capacity		TR	kW	10.54
Nominal Total Input Power			W	3750
Power Source		V/Ph/Hz	415/3/50	
Refrigerant Type		R-410A		
	Control		ration	Wired Control
		High	dm	1200
	Air Flow	Medium	dm	1040
		Low	dm	880
	External Static Pressure		Pa	30
	Sound Pressure Level		dBA	53
Indoor Unit		Height	mm	375
Indoor Only	Unit Dimension	Width	mm	780
		Depth	mm	560
		Height	mm	380
	Packing Dimension	Width	mm	945
		Depth	mm	570
	Unit Weight		kg	31
	Condensate Drain Size		mm	32
		Height	mm	700
	Unit Dimension	Width	mm	1025
		Depth	mm	410
		Height	mm	715
	Packing Dimension	Width	mm	1130
Outdoor Unit		Depth	mm	455
	Unit Weight		kg	66
		Туре		Brazing
	Pipe Connection	Liquid	mm	9.52
		Gas	mm	15.87
	Refrigerant Charge		kg	2.65

Note: Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19°CWB; Outdoor temp., 35°CDB. Rated heating capacities are based on the following conditions: Indoor temp., 20°CDB; Outdoor temp., 7°CDB, 6°CWB. All unit are being tested and comply to ISO 5151 (Non-ducted unit)

# DAIKIN AT A GLANCE

### 9 Facts we're the leader



\$29
Billion



100 Worldwide Production Bases

Over



50ld in Over

170

Countries



Founded in 1924
Created Global Air

**Conditioning History** 



### **Air Specialists**

From heating and cooling to refrigeration and freezing, Daikin has a team of air specialists standing united to help customers.



### **03 Core Technologies**

Daikin leads the air conditioning market in Heat Pump, Inverter and Refrigerant control.



Investment in Advance R&D Centre

\$300



Pursuit of the Optimal Solution

**R-32** 



# **Unlocking Human Potential People-Centred Management**

Daikin offers an environment and opportunities nurturing growth where people work with enthusiasm and purpose.