DAIKIN

WORLD'S LEADING AIR CONDITIONING COMPANY FROM JAPAN

Residential AC Catalogue - 2026

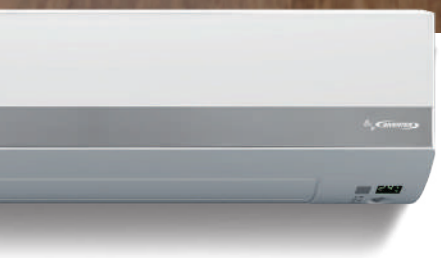

Comfort
Smart IoT with Mobile & Voice control

Air Quality
Patented Streamer Discharge Technology for Germ Free Air

Reliability
Patented DNNS Coating for Anti-Corrosion

Efficiency
Patented Swing Compressor for Power Saving

THE AIR SPECIALIST

Daikin has been at the forefront of innovation since 1924. Our products have a reputation for high quality, reliability, and technological innovation. This includes a wide range of products with advanced features such as Patented Streamer Discharge technology, Patented Swing Compressor technology, IoT-enabled technology, R-32 refrigerant, and many more. So, when it comes to air, trust the World's Leading Air-Conditioning Company, Daikin - The Air Specialist with more than 100 years of experience that ensures safe, healthy, and comfortable indoor environments.

We listen to our customers and deliver solutions that meet their changing needs. Our commitment to offer only quality products is the result of our in-depth research and innovation powered by 3 full line AC manufacturing units, 1 device & 2 compressor factories, 2 mechanical R&D centers, 1 AI & IoT center, 2 Air conditioning development center (ACDC) and 44* Daikin center of excellence. We provide air conditioning solutions that meet the cooling demands of any setting (0.8 Tr to 2700 Tr), ranging from Split Air Conditioners, Ducted Air Conditioners, VRV Air Conditioners to Chillers and Commercial Refrigeration.

Daikin has had the privilege of providing air conditioning services for several marquee installation projects across different sites in India.

*As on December 2025.

Statue of Unity Bharuch	International Hockey Stadium Odisha
Central Vista New Delhi	Airports (Across India)
Metros (Across India)	Radisson Blu Hotel Srinagar
M3M Smart World Apartment Gurugram	Vellore Institute of Technology (VIT)
Reliance Jio Institute Mumbai	TNR Shopping Mall Hyderabad

Stadium

Metro Stations

Skyscraper

Airports

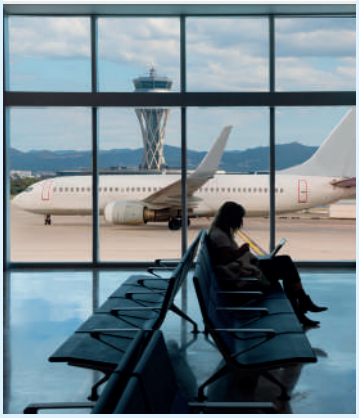

CONTENTS

03 What Daikin stands for

05 Daikin India's Journey of success

06 We innovate because we care

07 Innovating for the next

09 Taking control of the future with inverter technology

10 Befriending the environment

11 Innovating to lead

12 Patented Streamer Discharge technology

30 Inverter split Air conditioner features

52 Non-Inverter split Air conditioner features

57 Technical specifications

91 All reasons to bring Daikin home

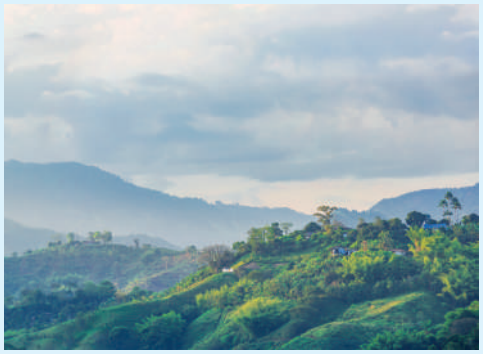

INVERTER Inverter Technology 09

R-32 Eco-friendly Green Refrigerant 10

Innovating to Lead 11

WHAT DAIKIN STANDS FOR

Daikin is a diverse multinational company active in air-conditioning, chemicals and oil hydraulics. With headquarters in Osaka, Japan, the Daikin family has over 1,03,544* members, working across 133 production units and a large customer base in over 173 countries worldwide. As the world's sole manufacturer that develops a long line of products, from refrigerants to air-conditioners, Daikin advocates comfortable living on the strength of advanced technologies.

Today, the world is a single global market, and Daikin continues to address new challenges, creating headways and achieving milestones.

*As per March 31, 2025 total number of employees are 1,03,544 (Non-consolidated: 7,866).

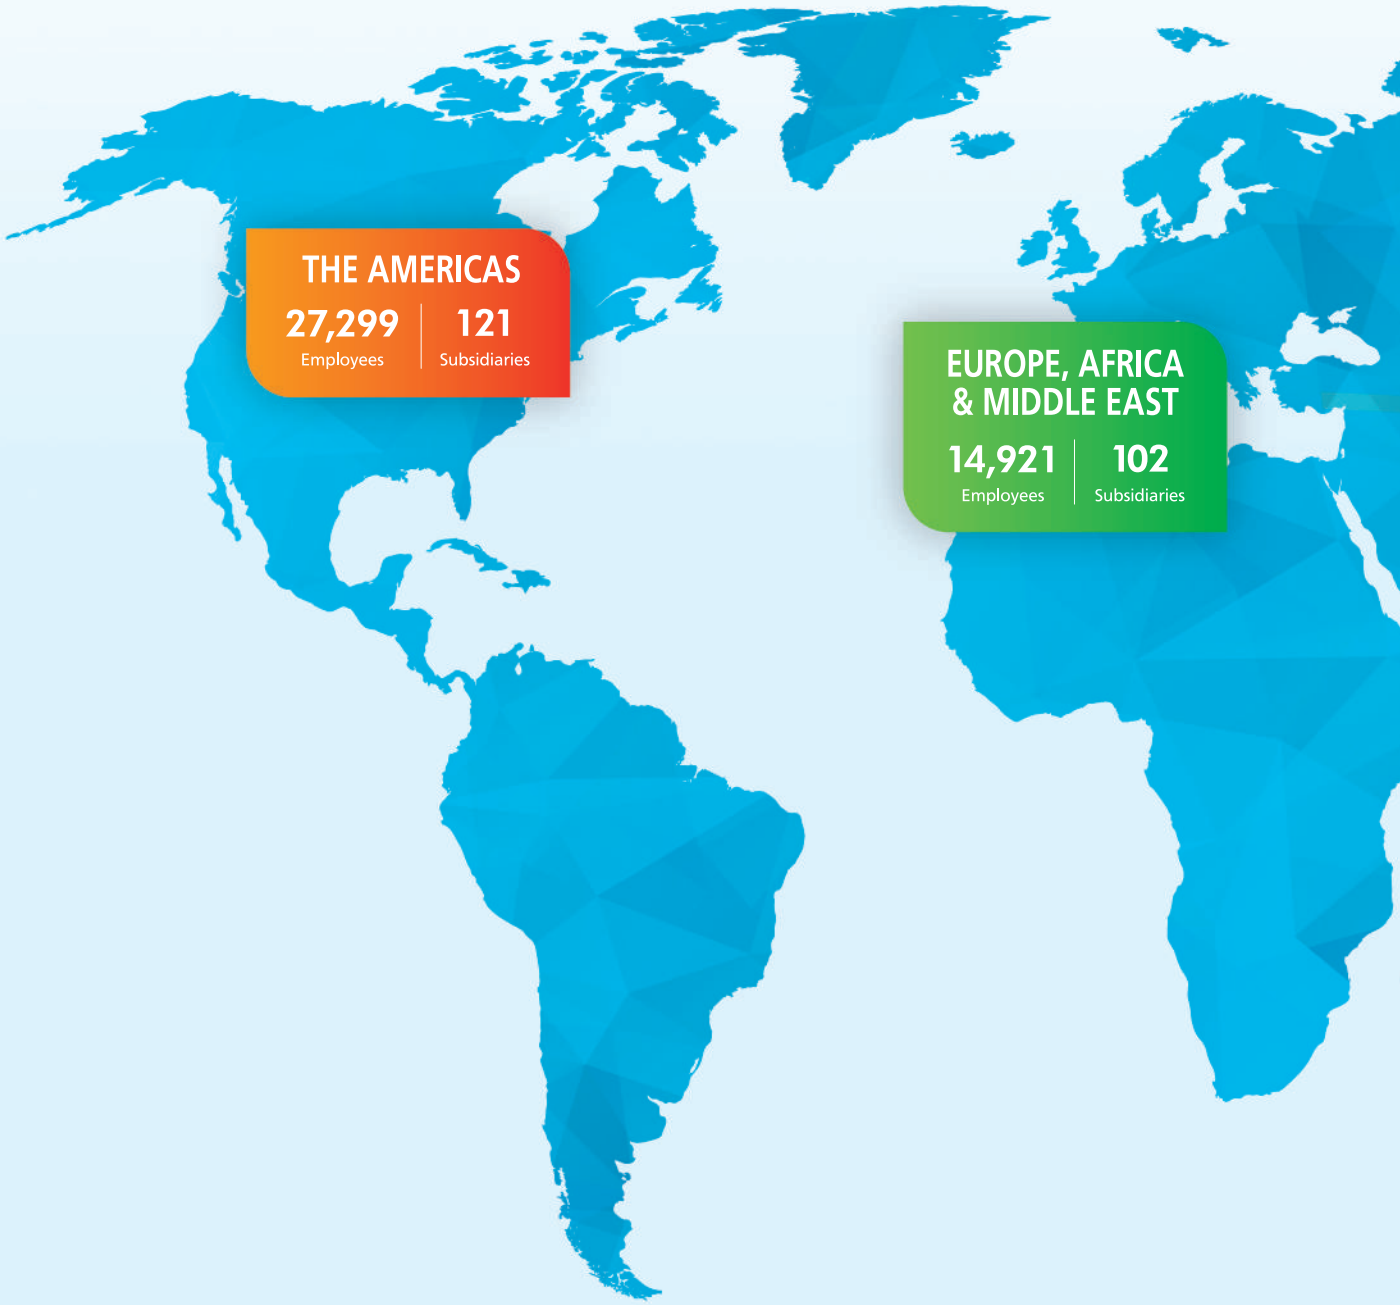

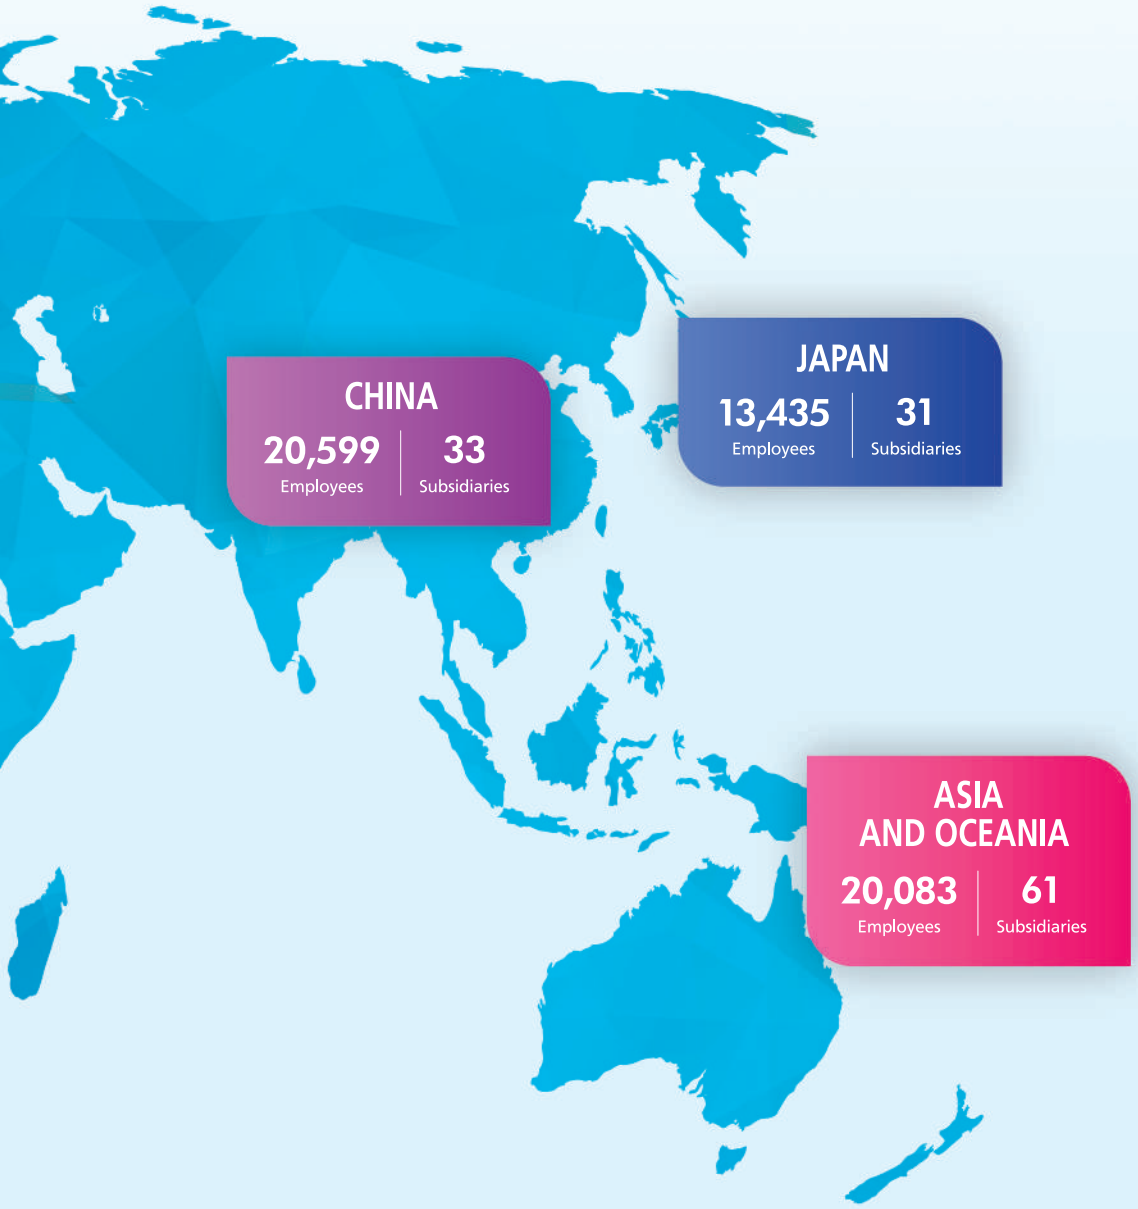
CHINA
20,599
Employees
33
Subsidiaries
JAPAN
13,435
Employees
31
Subsidiaries
ASIA
AND OCEANIA
20,083
Employees
61
Subsidiaries

DAIKIN INDIA'S JOURNEY OF SUCCESS

2000
Daikin enters the Indian market in a JV with Usha Shriram Group at 80:20 stakes respectively as Daikin Shriram Airconditioning.

2002
Daikin introduces VRV technology in India.

2004
Daikin India becomes a wholly owned subsidiary of Daikin Industries Ltd., Japan.

2007
Daikin India relocates HQ to Gurgaon and commences business of McQuay Chillers in India.

2008
Groundbreaking ceremony of Daikin India's manufacturing base at Neemrana, Rajasthan.

2009
Production commences at manufacturing plant in Neemrana, Rajasthan.

2010
Fresh round of ₹250 crore investment. Thus, taking it to a total of ₹743 crore.

2012
Production of High Wall Split air-conditioners with R-32 refrigerant commences.

2013
Fresh round of ₹330 crore investment.

2015
MoU signed with Rajasthan Govt. for ₹600 crore investment, ₹60 crore investment for Research and Development Centre.

2016
- Research and development centre opens at Neemrana, Rajasthan.

2017
- Second production facility opens at Neemrana, Rajasthan.
- NECA Award

2021
- Daikin India acquires Citizen Industries.
- Setup of 3rd manufacturing plant in Sri City (AP)

2022
Winners of:
- Global Cooling Prize
- Good Design Award for single way cassette
- NECA Award

2023
- Inaugurated Sri City Factory manufacturing Room AC and Compressors
- Daikin India acquires Virgo Technologies boosting Applied Business including Control Solutions

2024
- DAIPL signs MoU for 30+ acres in Sri City for future growth

2025
- Daikin India Joint Venture with Rechi to setup a new compressor facility.
- Inaugurated 2nd R&D centre at Neemrana, Rajasthan.
- Daikin India wins NECA award for the 3rd Time.

We *innovate* because we CARE

- We are elated to receive The National Energy Conservation Award 2025 for Appliance of The Year in Air-conditioning category by the Govt. of India.
- This award is a testament to our continuous research to reduce energy consumption and refrigerant impact.
- We continuously strive to improve energy efficiency technology with low GWP refrigerant alternatives to make the planet better and greener.

3 Times WINNER 2017,2022 & 2025

*FTKM50 wins appliance of the year award under AC category, National Energy Conservation Award- 2025.

INNOVATING FOR THE NEXT

ENGINE OF GROWTH - MANUFACTURING PLANT

Daikin's manufacturing plant at Neemrana, Rajasthan & Andhra Pradesh aim to create products that will add comfort to the lives of people. It is supported by a network of production bases throughout the world and showcases the application of advanced technology and equipment. Our comprehensive quality control system features centrally computerised management of quality and production data to facilitate high-quality production within scheduled time.

Factory 1 - Neemrana, Rajasthan

Factory 2 - Neemrana, Rajasthan

Factory 3 - Sri City (Andhra Pradesh)

Compressor & Device manufacturing facility

TRAINING FACILITY

ACDC Centre, Neemrana, Rajasthan

ACDC Centre, Sri City (Andhra Pradesh)

Disclaimer - Visuals used are for representation purpose only.

Mechanical R&D Centre 1 - Neemrana, Rajasthan

Mechanical R&D Centre 2 - Neemrana, Rajasthan

RESEARCH & DEVELOPMENT FACILITY

IoT Centre

27+ Lab facilities

- Psychometric lab
- Multi-chamber lab
- Full Anechoic chamber for running sound test
- Product Reliability test lab, CFM test lab and Psychrometric lab

7 Test & other facilities

- Cyclic Corrosion test
- Salt Spray test
- Thermal Shock test
- Vibration test
- Environmental test
- Drop test
- Concept room
- Mock-up area
- Device test room (electronic parts test room)

Assembly line at Daikin Factory

TAKING CONTROL OF THE FUTURE WITH INVERTER TECHNOLOGY

SCAN TO WATCH THE VIDEO

WHAT IS INVERTER TECHNOLOGY AND HOW IS IT DIFFERENT FROM NON-INVERTER TECHNOLOGY?

INVERTER

An inverter is a device for converting frequency. The technology is used in many home appliances and it controls electric voltage, current and frequency. Inverter air-conditioners vary their cooling/heating capacity by adjusting the frequency of their compressors.

WHAT ARE THE BENEFITS OF INVERTER AIR-CONDITIONERS?

	Powerful Inverter air-conditioners operate at maximum capacity as soon as they start up. As a result, the set temperature can be reached more quickly.
	Energy saving After the indoor temperature approaches the set temperature, the inverter control adjusts to low capacity operation to maintain this temperature. This makes inverter models more efficient in energy saving than non-inverter models, which repeatedly start or stop their compressors to maintain the room temperature.
	Comfortable Inverter air-conditioners finely adjust capacity according to changes in the air-conditioning load and the difference between the indoor temperature and set temperature reduces. This gives higher comfort level than the non-inverter air-conditioners.

BEFRIENDING THE ENVIRONMENT

R-32

SCAN TO WATCH THE VIDEO

Air surrounds us at every moment of our lives. It sustains us—and the planet we call home. At Daikin, caring for the future of air means caring for the future of the Earth. That responsibility drives everything we do.
To reduce environmental impact, we have completely phased out R-22 and adopted R-32, a next-generation refrigerant with significantly lower global warming potential. R-32 is more energy-efficient, ozone-friendly, and supports responsible cooling for a warming world.

Going beyond our products, Daikin has also opened global access to patents for R-32–based equipment, encouraging industries worldwide to move towards greener solutions. Because choosing the right refrigerant is a crucial step in protecting the ozone layer and building a more sustainable future.

Our all Residential Air Conditioner models manufactured in India use the next-generation refrigerant, R-32.

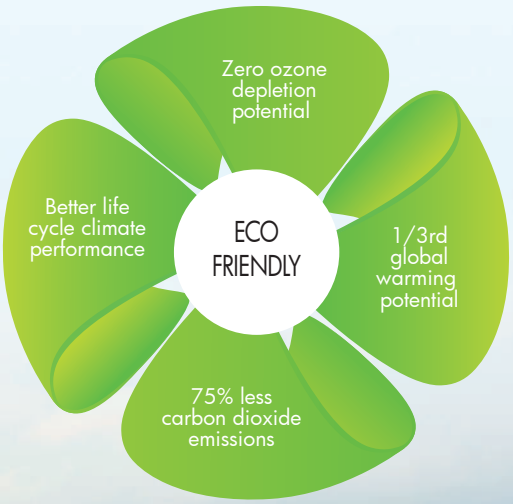

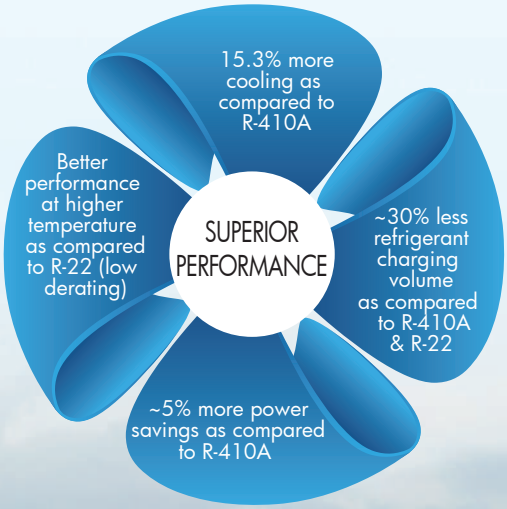

INNOVATING TO LEAD

Daikin's constant quest to lead is a philosophy that has been with the company since its inception. Every product that carries the Daikin seal of approval automatically gives the user an unmatched experience.

- Patented Streamer Discharge technology
- Highest ISEER
- Tru Inverter
- Patented DNNS Coating
- Anti-Corrosion Treatment
- Getting Smarter with IoT
- Hepta Sense
- Multi-Layer Fire Safety
- Auto On-Off by Intelligent Eye
- High Ambient Operation: 55°C
- Dew Clean Technology
- Triple Display
- 3 Stage Air Filtration
- Powerful Air Throw
- Filter Clean Indicator

*For selected models

PATENTED STREAMER DISCHARGE TECHNOLOGY

SCAN TO WATCH THE VIDEO

GET YOUR AIR 'IMMUNIZED'

Daikin's streamer discharge inactivates 99.9% of the novel coronavirus (sars-cov-2)*.

"Streamer discharge" is a type of plasma discharge which generates high speed electrons that combine with oxygen and nitrogen in the air and turn into active species with strong oxidative decomposition power and thereby eliminates allergens such as mould, mites (droppings and dead mites), pollen and hazardous chemical substances such as formaldehyde. Compared to standard plasma discharge (glow discharge), its speed of oxidative decomposition is over 1000 times greater with the same electrical power. The decomposition power is comparable to thermal energy of about 100,000°C.#

MECHANISM OF DECOMPOSITION BY STREAMER

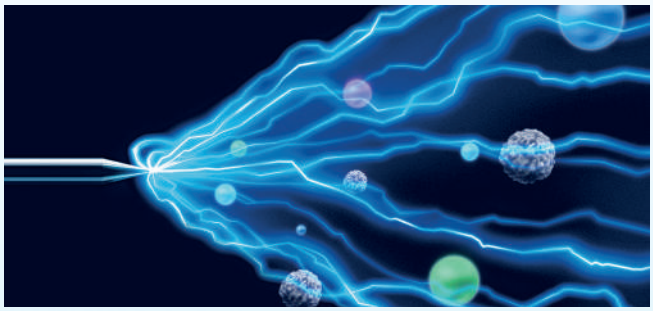

Streamer emits high-speed electrons.

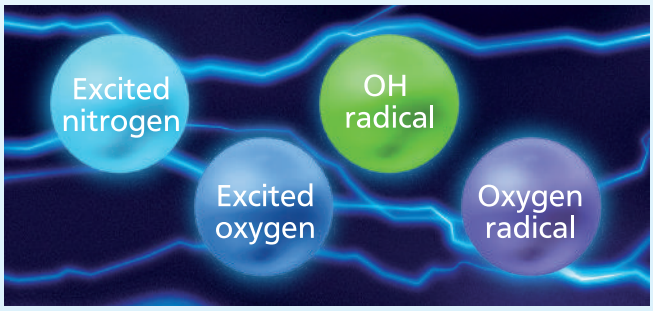

The electrons collide and combine with nitrogen and oxygen in the air to form four kinds of decomposing elements with decomposition power.

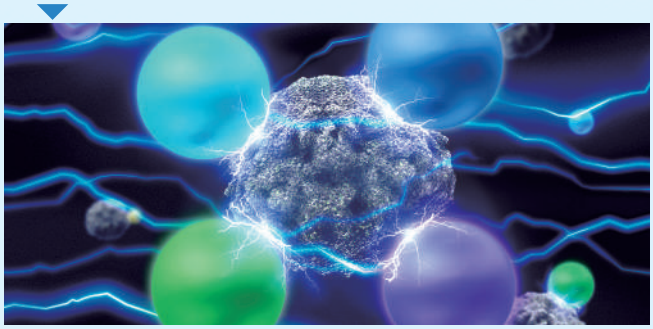

The decomposing elements provide decomposition power.

- Testing organization: Okayama University of Science
- Test subject: Novel coronavirus (CoV-2)
- Test result: 99.9% or more inactivation in 3 hours
- Test Method: Irradiating the streamer inside an acrylic box of about 31L
- Report date: 8th July 2020

Note:

*a. This result was obtained by using a small streamer discharge device for testing in lab conditions. The effects of products equipped with small streamer technology or results in actual use environments may differ.

*b. It does not prove the effect against all viruses and bacteria.

#Comparison of oxidative decomposition. This does not mean temperature will become high.

For more information visit: https://www.daikinindia.com/streamer-technology-to-inactivate-coronaviruses.

HIGHEST ISEER

ISEER
6.60*
RATING

ROLE

Daikin's Integrated Power Module Printed Circuit Board and Patented Swing Compressor Technology are a unique engineering design where the PCB (Controllers) is designed in such a way that it optimizes the cooling effect & also result in higher efficiency. Based on this engineering design, we are able to achieve higher ISEER of 6.60 which is 18% more than current 5 star ISEER 5.6 requirements.

FUNCTIONALITY

With Daikin's highest ISEER models, you get a product with a rating of 6.60* ISEER, which is best in the 5 star category and is extremely energy efficient. As per BEE standard, the qualifying criteria for 5 star rating AC is of 5.6 ISEER.
It ensures that you get the highest performance in the 5 star category.

BENEFITS

	It saves power; ideal for long usage.
18% MORE ISEER	18% more energy efficiency as compared to 5 star AC with ISEER 5.6.
	It helps in saving more electricity.
55°C	Cools even at 55°C.

*Model FTKF35XV16MAA with ISEER of 6.60.

DAIKIN ADVANTAGE

DAIKIN 5 STAR ACs	v/s	NORMAL 5 STAR ACs
6.60* ISEER Rating		5.6 ISEER Rating

TRU INVERTER

TRU INVERTER

ROLE

Daikin inverter air conditioners use Variable Frequency Drive (VFD) and patented Swing Compressor Technology for variable speed operation. With a wider rotational frequency range, they deliver faster cooling, efficient heating, and superior energy savings.

FUNCTIONALITY

Daikin Inverter ACs with Patented Swing Compressors operate on nearly 50 frequencies, double that of conventional inverters. This makes them true. "TRU Inverter ACs" with smoother and more efficient performance.

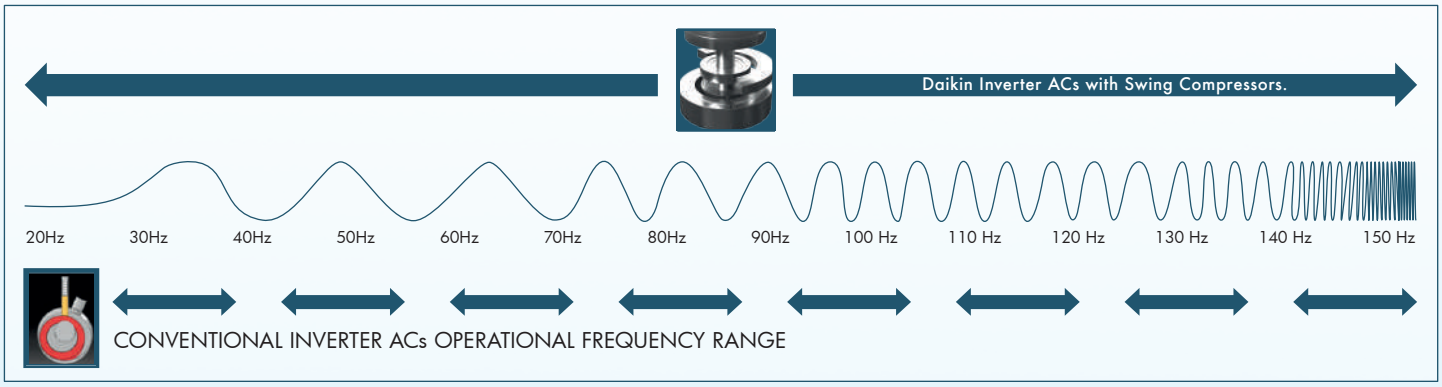

DAIKIN TRU INVERTER ACS WITH SWING COMPRESSORS

Daikin's Tru Inverter ACs with Swing Compressor ensure consistent room temperature by adjusting compressor speed across a wide frequency range.

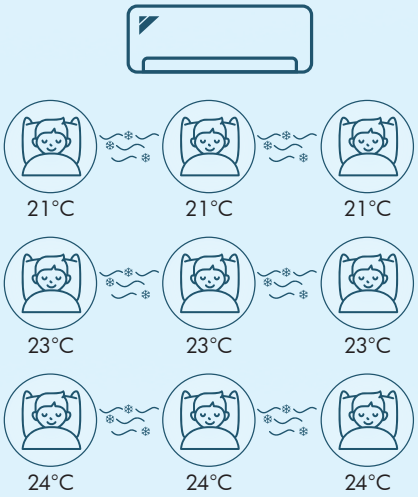

CONVENTIONAL INVERTER ACS

Conventional inverter ACs have limited frequency adjustments, causing temperature fluctuations and uneven cooling.

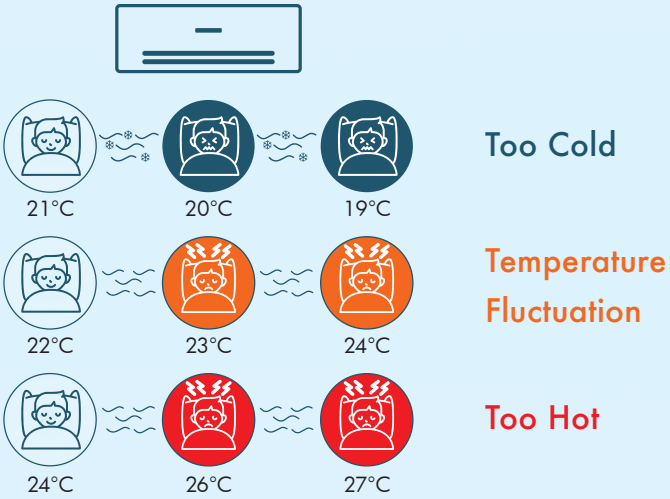

BENEFITS

- Faster Cooling/ Heating
- Uniform Temperature for Maximum Comfort
- Fully Automatic, No Manual Operation
- Saves Power and Ideal for Long Usage

*PATENTED DNNS COATING

SCAN TO WATCH THE VIDEO

ROLE

Every Daikin Room AC's Indoor Unit (U-bend side) is coated with advanced anti-corrosive coating active agent DNNS (Di-Nonyl Nephthalene Sulfonic Acid).

The coating activates upon chipping scratches due to environmental or chemical pollution, impact on copper pipes, tubes, or U-bends.

FUNCTIONALITY

The coating maintains surface tensions, forming a protective layer that acts as an intermediary between oil and resins. In case of scratches, the surrounding paint film moves to compensate, ensuring a seamless defense mechanism.

BENEFITS

COPPER	Longer life of copper coil and air conditioners due to lowering of corrosion impact.
	Durability of copper coil in the indoor unit extends the AC's lifetime by making the coil corrosion resistant.
	Makes the entire copper coil anti-corrosive, and heals the coil if it chips off due to various external reasons.
2X	DNNS Coating and Benzotriazole Oil's anti-corrosion treatment provides exceptional defense against copper pipe corrosion.

DAIKIN COIL

OTHER COIL

Pollution

Dust

Moisture

Benzotriazole Oil Anti-Corrosion Treatment along with DNNS Coating is the exceptional defence of Daikin ACs against corrosion of copper pipes

*Tested with 1000 PPM for 16Hr on 45°C. Patent No. JP6699777B2 (Patented in Japan by Daikin Industries Ltd.)

ANTI-CORROSION TREATMENT

SCAN TO WATCH THE VIDEO

ROLE

The Benzotriazole Oil prevents the heat exchanger from corrosion, thus ensuring that it lasts longer to deliver optimum cooling for long time. With this, the corrosion of copper is delayed by up to 2.8 times.

FUNCTIONALITY

In Anti-Corrosion Treatment Function, a special coating of Benzotriazole Oil is added to the copper coil to prevent corrosion. The treatment reduces the effect of nitric and acetic acid reaction on the copper coil of indoor & outdoor units. It is especially effective against the Indian climatic conditions – rainy season, high humid area, coastal area and industrial smokes and polluted areas.

BENEFITS

COPPER	Longer life of copper coil and air conditioners due to lowering of corrosion impact.
	Durability of copper coil in indoor & outdoor units extends the lifetime of air conditioners by making the indoor & outdoor coil corrosion-resistant.

GETTING SMARTER WITH IoT

SCAN TO WATCH THE VIDEO

ROLE

In recent times IoT has made strong entry into our homes, augmenting comfort & revolutionizing the way we use gadgets. It enables us to control our room air conditioner through our smartphone or simply through voice command.

FUNCTIONALITY

Daikin IoT enabled Smart AC connects with Google Home/Amazon Alexa via Wi-Fi and also to your smartphone via Daikin AC Manager 2.0 India app. This enables you to control the AC in a smarter way.

CONFIGURING DAIKIN IoT ENABLED SMART AIR CONDITIONER IS EASY

*Download "Daikin AC Manager 2.0 India" App from Google Play Store for Android or Apple Store for iOS.

Install the application.

Register your phone no. and login.

Switch on your Daikin's IoT enabled smart air AC.

Activate Wi-Fi in your AC.

Connect Daikin India AC Manager Application with your Daikin AC.

Now you can start operating your AC. Enjoy!

To integrate Daikin's IoT enabled smart AC with Google Home or Amazon Alexa:

- Activate your device (Google Home or Amazon Alexa).
- Log into your account.
- **Follow these steps:**

  Step 1
  In Alexa and Google home app enable skill Daikin AC Manager 2.0 India and login.

  Step 2
  Discover and link Daikin AC unit.

  Step 3
  Control AC via voice command.

*Scan to download Daikin AC Manager 2.0 India App.

For iOS User | For Android User

*AC Manager 2.0 app navigates to the web browser for maintenance & services.
Note: Available for JTKJ/FTKR/FTKN Series.

1. REMOTE-FREE CONTROL

With the Daikin Smartphone App, you can control temperature, operation modes, swing direction, Fan Speed, Power Chill, Coanda Mode, and Dew Clean without using the remote.

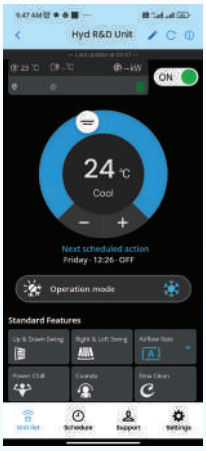

2. ADVANCED FEATURES

The app gives access to advanced functions like the Streamer for air purification, Intelligent Eye for energy saver, Auto On/Off. Available for the JTKJ/FTKR/FTKN Series (refer to the user manual for details). It also gives access to use outdoor quite operation.

3. ENERGY & TIME MANAGEMENT

Track your energy usage (daily, monthly, yearly) and estimate costs by inputting electricity rates. You can also set operation schedules (weekly or daily). (Refer to the user manual for details).

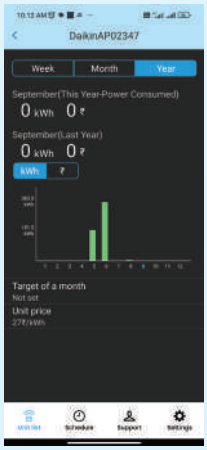

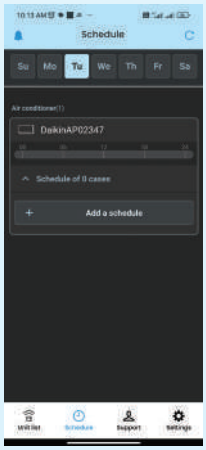

4. HELP & SUPPORT

*Access FAQs, demo videos, and book maintenance or service directly through the app. You can also contact support via call, text, email, or WhatsApp.

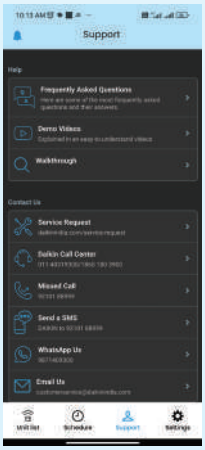

BENEFITS

	Users can control the AC with their voice in Hindi and English.
	No need to worry about misplacing the remote controller.
	Users have the option to cool down the room before entering through mobile app control.
	The App lets you control your AC from anywhere in the world.

NAME IT. SPEAK TO IT. CONTROL COMFORT EFFORTLESSLY.

ROLE

Experience a new way to enjoy comfort with smart air conditioning. Customize your AC by naming it and control it effortlessly with voice commands via Alexa or Google Assistant. From turning it on to adjusting the temperature and modes, enjoy a seamless and hands-free experience tailored to your comfort.

Feature	Action	Alexa Commands	Google Home
Power ON/OFF	Turn On	Alexa, Turn on "Unit Name"	Ok Google! Turn on "Unit Name"
	Turn Off	Alexa, Turn off "Unit Name"	Ok Google! Turn off "Unit Name"
Temperature Change	Set temperature to 23	Alexa, Set temperature to 23 in "Unit Name"	Ok Google! Set temperature to 23 in "Unit Name"
Operation Mode	Change mode to cool	Alexa, Set mode to cool in "Unit Name"	Ok Google! Change "Unit Name" to cool
Fan Speed	Set fan speed to low	Alexa, Set fan speed to low in "Unit Name"	Ok Google! Set fan speed to low in "Unit Name"
Up down Airflow direction	Turn On	Alexa, Turn on up down air in "Unit Name"	Ok Google! Turn on up down flap in "Unit Name"
	Turn Off	Alexa, Turn off up down air in "Unit Name"	Ok Google! Turn off up down flap in "Unit Name"
Left right Airflow direction	Turn On	Alexa, Turn on left right air in "Unit Name"	Ok Google! Turn on left right flap in "Unit Name"
	Turn Off	Alexa, Turn off left right air in "Unit Name"	Ok Google! Turn off left right flap in "Unit Name"
Coanda	Turn On	Alexa, Turn on coanda in "Unit Name"	Ok Google! Turn on coanda in "Unit Name"
	Turn Off	Alexa, Turn off coanda in "Unit Name"	Ok Google! Turn off coanda in "Unit Name"
Streamer	Turn On	Alexa, Turn on streamer in "Unit Name"	Ok Google! Turn on streamer in "Unit Name"
	Turn Off	Alexa, Turn off streamer in "Unit Name"	Ok Google! Turn off streamer in "Unit Name"
Intelligent eye - Auto ON/OFF	Turn On	Alexa, Turn on auto on/off in "Unit Name"	Ok Google! Turn on auto on/off in "Unit Name"
	Turn Off	Alexa, Turn off auto on/off in "Unit Name"	Ok Google! Turn off auto on/off in "Unit Name"
Intelligent eye - Energy Saver	Turn On	Alexa, Turn on energy saver in "Unit Name"	Ok Google! Turn on energy saver in "Unit Name"
	Turn Off	Alexa, Turn off energy saver in "Unit Name"	Ok Google! Turn off energy saver in "Unit Name"
Dew Clean	Turn On	Alexa, Turn on dew clean in "Unit Name"	Ok Google! Turn on dew clean in "Unit Name"
	Turn Off	Alexa, Turn off dew clean in "Unit Name"	Ok Google! Turn off dew clean in "Unit Name"
PowerChill/Powerful	Turn On	Alexa, Turn on power chill in "Unit Name"	Ok Google! Turn on power chill in "Unit Name"
	Turn Off	Alexa, Turn off power chill in "Unit Name"	Ok Google! Turn off power chill in "Unit Name"
Outdoor Unit Quiet	Turn On	Alexa, Turn on outdoor quiet in "Unit Name"	Ok Google! Turn on outdoor quiet in "Unit Name"
	Turn Off	Alexa, Turn off outdoor quiet in "Unit Name"	Ok Google! Turn off outdoor quiet in "Unit Name"

MULTI-LAYER FIRE SAFETY

ROLE

Daikin ACs operate seamlessly in challenging conditions like extreme temperatures and voltage fluctuations. Built with fire-resistant features, both the indoor and outdoor unit PCBs are encased in metal, preventing sparks from leading to potential fire hazards.

FUNCTIONALITY

In addition to meeting IS-302-1, IEC 60335-1, and IS 1391-2 standards, Daikin ACs are engineered with meticulous attention to detail, offering exceptional fire resistance. The metal casing around both the indoor and outdoor unit PCBs prevents any heat or fire from spreading due to malfunctioning.

BENEFITS

	Longer life of copper coil and air conditioners due to lowering of corrosion impact.
	Worry-free continuous operation
	Fully compliant with fire safety regulations



Metal Casing For PCBs

Separate earthing for PCBs

FR Grade Parts

1. FR GRADE PLASTIC

All the plastic parts are FR (Fire Resistance) grade UL94-5VA and UL94-V0. This make the plastic parts flame redundant and drip redundant.

2. METAL CASING FOR PCBS

Both the IDU and ODU PCBs are covered with metal casing, thus if there is any spark due to any malfunctioning, the heat or fire is prevented in advance.

3. SEPARATE EARTHING FOR PCBS

Separate earthing acts as a shield, absorbing stray electromagnetic fields and preventing crosstalk between signal traces. This improves electromagnetic compatibility and reduces noise, ensuring reliable PCB performance.

HEPTA SENSE

SCAN TO WATCH THE VIDEO

ROLE

The Hepta Sensors play a vital role by continuously sensing temperature change and working of critical components such as Compressor, PCB, Motors, or Heat Exchangers, thus providing convenience and increases durability.

FUNCTIONALITY

The 7 sensors located on the IDU and ODU protect the compressor, provides optimum cooling, increases safety, and ensures the compressor functions at the desired range and frequency.

BENEFITS

SENSOR	FUNCTION	BENEFIT
IDU HE Sensor	Measures the saturation temperature of evaporator	Protects compressor by not allowing flow of refrigerant into compressor when it is liquid
IDU Ambient Sensor	Constantly measures room temprature which adjusts compressor speed, maintaining optimum temperature.	Optimum Cooling by making sure AC operates at on desired cooling capacity
ODU HE Sensor	Measures the saturation temperature of condenser	Prevent compressor failure due to high pressure buildup in condenser side
ODU Ambient Sensor	Adjusts AC's cooling effect based on load variation by keeping track of outdoor ambient temperature.	Optimum Cooling by making sure AC operates on desired cooling capacity
OLP Sensor	Measure the top temperature of compressor	Act as second layer of safety and work if any of the other safety sensor stops or malfunction
Discharge Sensor	Constantly measures compressor head temperature to ensure its failure-free working.	Ensures healthy working of compressor, the most important part of an AC.
PCB Sensor	Measures temperature around PCB module	Prevent PCB failure due to high temperature and frequency

INDOOR UNIT SENSORS

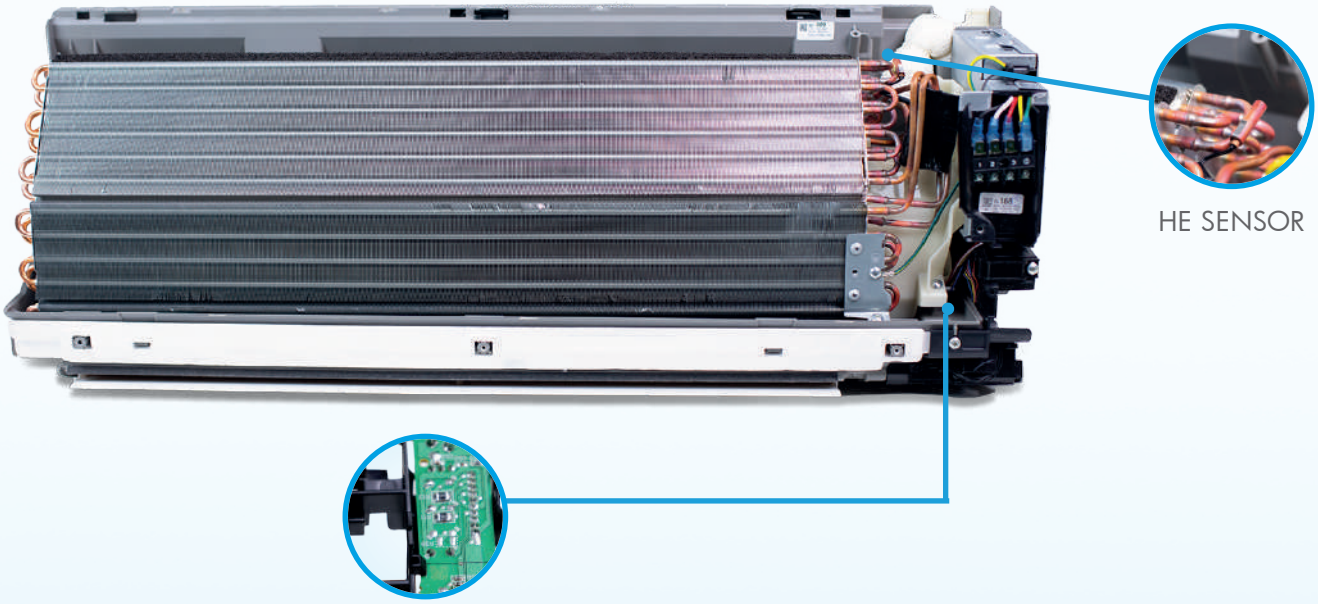

OUTDOOR UNIT SENSORS

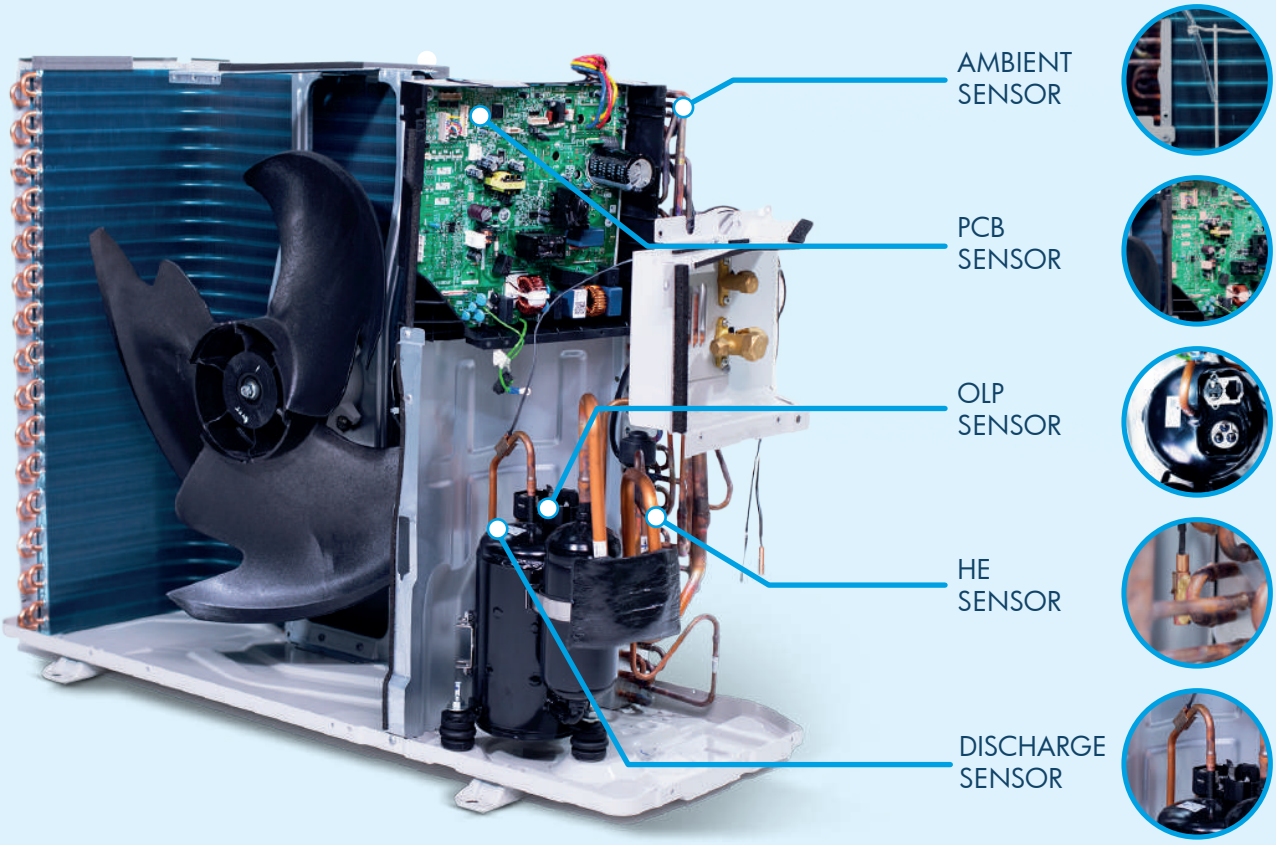

AUTO ON-OFF BY INTELLIGENT EYE

ROLE

Daikin's intelligent eye 2.0 is ever-watchful, consistently monitoring human presence within the room to automatically turn AC ON/OFF.

FUNCTIONALITY

If no presence is detected for 60 minutes, the AC automatically turns off and if human presence detected AC switches on automatically, saving energy without compromising comfort.

BENEFITS

	If no presence is detected for 60 min, AC will automatically turn off to save energy.
	No need to use the remote control with Daikin Auto On Off mode.
	Reduces wastage of cooling.

INTELLIGENT EYE OPERATION (AUTO ON-OFF)

WHEN SOMEONE IS IN THE ROOM

Normal Operation

The Air Conditioner is in normal operation while the sensor is detecting human movement.

WHEN NO ONE IS IN THE ROOM

Intelligent Eye 2.0 Mode

AC automatically turn off after 60 Min. if no human presence detected

SOMEONE IS BACK IN THE ROOM

Back to normal operation

The Air Conditioner will return to normal operation when the sensor detects human movement again.

Note: Available in WAIZU Series (JTKJ).

HIGH AMBIENT OPERATION: 55°C

55°C

ROLE

We see rising temperatures across various cities in India. Coupled with the urban effect, it is challenging for air conditioners to deliver superior cooling. Most of the air conditioners are designed to deliver cooling at 35°C. Daikin air conditioners are designed to perform at extreme ambient conditions as high as 55°C.

FUNCTIONALITY

The inverter air conditioner runs effectively even when the ambient temperature is on the extreme high end. With Patented Swing Compressor Technology and integrated power module smart controllers, it keeps cooling your room even at 55°C.

BENEFITS

	Ideal for dry and tropical regions of the country.
	Less influence of outside temperature on cooling.
	Lower deration effect.

*Available in all 5 star models.

*No derating till 46° C for 5 Star models.

DEW CLEAN TECHNOLOGY

SCAN TO WATCH THE VIDEO

ROLE

Dirt, which cannot be removed by the filter, accumulates on the heat exchanger. It becomes a breeding ground for bacteria and moulds and generates a foul odour. The Dew Clean Technology in Daikin ACs auto cleans the heat exchanger, helping get rid of bacteria, moulds and other unwanted particles.

FUNCTIONALITY

The Dew Clean Technology in air conditioners auto cleans the coil of Indoor unit heat exchanger.

In this function, condensated water volume is used to clean the indoor unit heat exchanger. After cleaning of indoor unit heat exchanger, the condensed water drains out the dust particles, bacteria and mould from the indoor unit coil. After completion, unit automatically switches to drying operation to dry the heat exchanger.

It is recommended to perform this function once in a month for better result.

BENEFITS

	Better cleaning of Indoor Unit Heat Exchanger ensures better airflow throughout the year.
	Consistent cooling performance of air conditioners.
	Ensures odour-free fresh air all the time.
	It suppresses mould formation and helps get rid of bacteria.

WORKING OF DEW CLEAN TECHNOLOGY

ABOUT 65 MINUTES → ABOUT 30 MINUTES → = TOTAL TIME 95 MINUTES APPROX.



Dew clean Function Start (in Cooling Mode)

STEP-1



Dry Mode

STEP-2

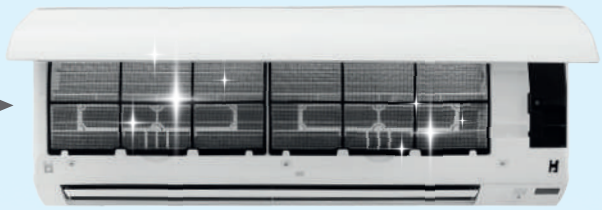

Factory Fresh Indoor Unit

HOW DOES IT OPERATE ?

You can operate Dew Clean Technology function by simply pressing the dedicated button on remote control.

TRIPLE DISPLAY

SCAN
TO WATCH
THE VIDEO

ROLE

The Triple Display Function shows percentage estimation of the power consumed. It is done on a real-time basis by our air conditioner unit. It helps the user to track and check the power consumed at that particular time. In this function we can also see the set temperature and room temperature of air conditioner along with error code.

FUNCTIONALITY

Each press of the display button on remote will enable the user to see estimated power consumption percentage on a real time basis, indoor temperature display and set temperature display respectively. This function allows users to see and monitor the approx. power saving and also to maintain the comfortable room temperature as per their requirement.

BENEFITS

50%	With this feature, the consumer can monitor the estimated power consumption percentage of the AC at any given point in time, on a real time basis.
	It monitors the running capacity of the AC unit. For example, if a 1.5 TR machine's power consumption display is showing 50%, it means that it is consuming approx. half of the power of the given unit, which reflects the monetary benefit on electrical saving for you.
	Daikin Inverter Technology ensures that your AC runs at optimum capacity.
	With this feature, the consumer can see indoor temperature and set temperature along with error code.

Note - Daikin Inverter Technology ensures your AC runs at optimum capacity.

*Value given for FTKF50 model.
The value may go down or up depending on actual room condition.
#Visuals used are for Representation purpose only.

FILTER CLEAN INDICATOR

ROLE

To notify users when the AC filter requires cleaning, helping maintain optimal performance and indoor air quality.

FUNCTIONALITY

The Filter Clean (FC) indicator conveniently reminds the user when it's time to clean the air filter, helping maintain optimum cooling performance, energy efficiency, and longer unit life. This feature can be easily turned ON or OFF as per user preference.

BENEFITS

	Reminds to clean clogged filters.
	Ensures better indoor air quality.
	Maintains efficient cooling and airflow.
	Supports in timely upkeep.

3 STAGE AIR FILTRATION

SCAN TO WATCH THE VIDEO

ROLE

The 3 Stage Air Filtration process captures micro dust particles and eliminates pollutants & airborne pathogens such as viruses, bacteria, mould, and fungi to make the indoor air clean, safe, and fresh.

FUNCTIONALITY

The 3 Stage Air Filtration process includes Pre Filter/Dust Filter and combination of PM1.0/PM2.5 filter together with special filters as metioned below.

It kills and deactivates microbes with its anti-viral properties and eliminates mould/fungi/odour for clean, fresh & pure air inside your room.

BENEFITS

	Extremely useful as it removes the minutest of pollutants.
	Protection from bacteria and viral antigens.
	Captures micro dust particles and offers hassle-free cleaning.

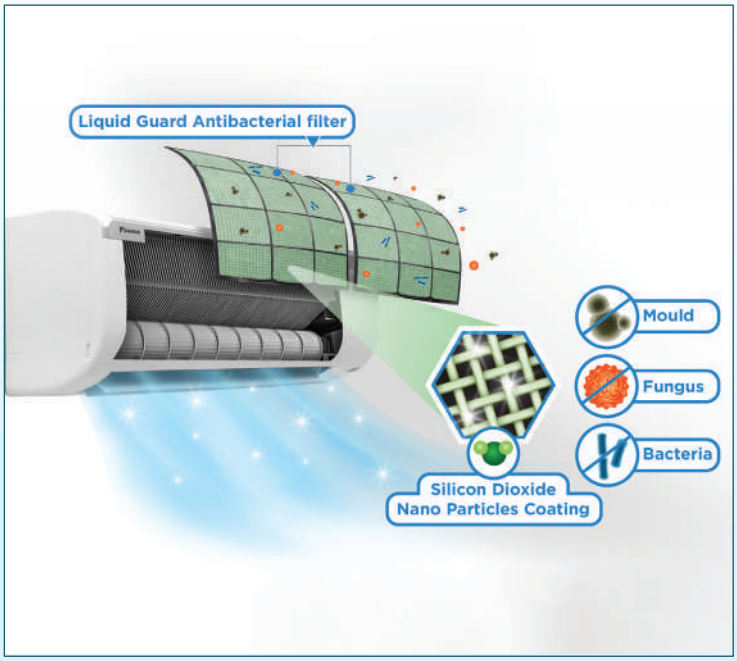

SPECIAL FILTERS

PM 2.5 Filter	Helps to improve air quality by trapping particles size ~2.5 microns
PM 1.0 Filter	Helps to improve air quality by trapping particles size ~1.0 microns
3 Layer Filter	Improve indoor air quality by reducing VOCs, Allergens and other airborne contaminants
Co_2 Filter	Traps odours through a process called adsorption
Apataito Filter	Deodorizing filter helps break down odours such as those from cigarettes and pets
Active Carbon Filter	Helps to reduce VOCs and odour

*Actual image may vary. Filter's benefits and claims as per test results by authorised laboratory, for more details kindly visit our website www.daikinindia.com

POWERFUL AIR THROW



22 Meters*
Airflow

CROSS FLOW EVAPORATOR FANS

With the Cross Flow Evaporator Fans, Daikin Air Conditioners ensure uniform cooling and a powerful air-flow that allows one to receive the cool air up to 22 meters*(72 Feet) away from the unit.

The unique Cross Flow Evaporator Fans and Power Airflow Dual Flaps help in cooling down all sorts of spaces, big and small. Moreover, they help to ensure uniform cooling and deliver peace of mind.

*Above given value is for 5 Star 5kW models.
Value may vary from model to model.

AIR THROW
72 FEET/ 22 METERS

INVERTER SPLIT AIR CONDITIONER FEATURES

10 YEARS WARRANTY ON COMPRESSOR	Long term assurance
5 YEARS WARRANTY ON PCB	Additional peace of mind
PATENTED SWING COMPRESSOR	Energy & money savings
STABILIZER INSIDE	No worry on voltage fluctuation
POWER-AIRFLOW DUAL FLAPS	Even Airflow distribution across all corners
COANDA AIRFLOW	Even airflow distribution to every corner of the room
PATENTED DNNS COATING	Enhanced durability
MULTI-LAYER FIRE SAFETY	Safety-Focused, Compliant and Worry-Free Operations
TRU INVERTER	Maximum user comfort with automated operations.
HEPTA SENSE	Reliable & safe operations.

JTKJ 5★

WAIZU SERIES

INVERTER R-32

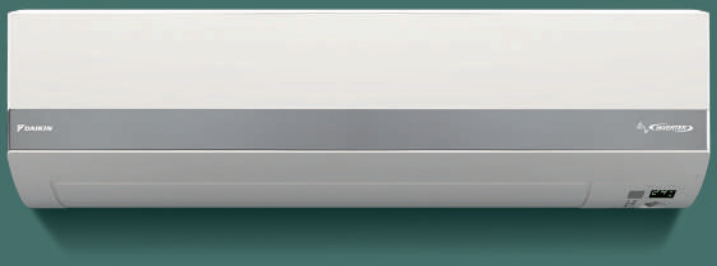

KEY FEATURES

Available in Cooling (kW): 3.5, 5.28, 6.0

Patented Streamer Discharge Technology
For germ free pure air

Intelligent Eye
Auto On-Off and Energy Saver by Intelligent Eye

Cools upto 55°C
Comfortable cooling at extreme conditions

Mobile App Control
Control from any corner of the world through mobile App

Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Voice Control with Smart Speaker
Voice Controlled via Amazon Alexa & Google Home

Filter Clean Indicator
Ensures timely filter upkeep

Dew Clean Technology
For better airflow & consistent cooling

PRODUCT DETAILS

Model Name	IDU	JTKJ35XV16VAA	JTKJ53XV16MAA	JTKJ60XV16MAA
	ODU	RKJ35XV16VAA	RKJ53XV16MAA	RKJ60XV16MAA
Rated Cooling Capacity	kW	3.5	5.28	6.0
ISEER Rating	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	716.97	814.17
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

SPECIAL FILTERS

PM 1.0 Filter
Helps to improve air quality

*Note: Air Throw given for 5.28 kW & above capacity models only.
Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKF 5★

HIGHEST ISEER SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0

ISEER 6.60* RATING
Highest ISEER 6.60*
18% more energy efficiency compared to 5 Star AC with ISEER 5.6

Good Sleep off Timer
For comfort during sleep

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

***Triple Display**
For monitoring and control

Dew Clean Technology
For better airflow & consistent cooling

3D Airflow
For uniform cooling

Stabilizer Inside
For smooth operation during fluctuations

Filter Clean Indicator
Ensures timely filter upkeep

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

PRODUCT DETAILS

Model Name	IDU	FTKF35XV16MAA	FTKF50XV16MAA	FTKF60XV16LAA
	ODU	RKF35XV16MAA	RKF50XV16MAA	RKF60XV16LAA
Rated Cooling Capacity	kW	3.52	5.0	6.0
ISEER Rating	Wh/Wh	6.60	6.30	6.00
Rated Annual Power Consumption	kWh	413.07	614.76	774.15
IDU Colour		Premium White	Premium White	Premium White

SPECIAL FILTERS



3 Layer Filter
Triple Filtration Process

PM 1.0 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models.
*Model FTKF35XV16MAA with ISEER of 6.60.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKR 5★

WI-FI SERIES

INVERTER R-32

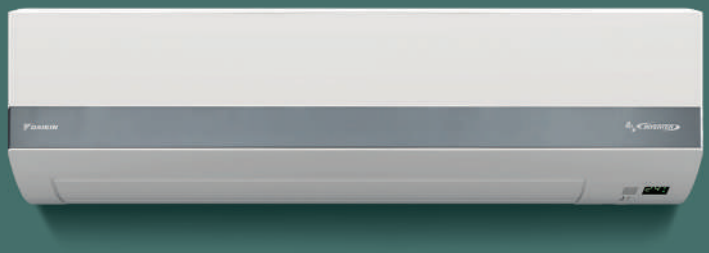

KEY FEATURES

Available in Cooling (kW): 3.5, 5.0, 6.0

Mobile App Control
Control from any corner of the world through mobile App

***Triple Display**
For monitoring and control

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

Voice Control with Smart Speaker
Voice Controlled via Amazon Alexa & Google Home

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Filter Clean Indicator
Ensures timely filter upkeep

Dew Clean Technology
For better airflow & consistent cooling

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKR35XV16VAA	FTKR50XV16MKA	FTKR60XV16MAA
	ODU	RKR35XV16VAA	RKR50XV16MKA	RKR60XV16MAA
Rated Cooling Capacity	kW	3.5	5.00	6.0
ISEER Rating	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	814.17
IDU Colour		White with Gray Décor Strip	White with Gray Décor Strip	White with Gray Décor Strip

SPECIAL FILTERS

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.
Ambient temperature mentioned for all 5 star models.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKM 5★

PREMIUM SERIES

INVERTER R-32

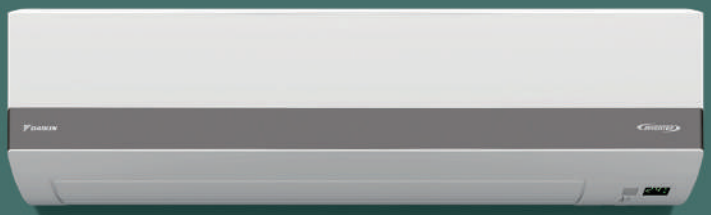

KEY FEATURES

Available in Cooling (kW): 3.50, 5.0, 5.28, 6.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

*Triple Display
For monitoring and control

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Winner of National Energy Conservation Award 2025, for FTKM50

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKM35XV16VAA	FTKM50XV16MKA	FTKM53XV16MAA	FTKM60XV16MAA
	ODU	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
ISEER Rating	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

SPECIAL FILTERS



Active Carbon Filter
Helps to remove VOCs and odour

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

ATKM 5★

PREMIUM SERIES

INVERTER R-32

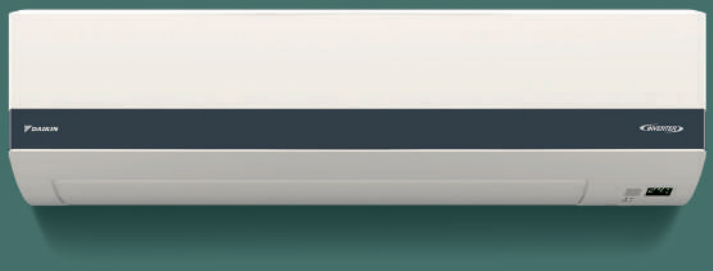

KEY FEATURES

Available in Cooling (kW): 3.50, 5.0, 5.28, 6.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

Triple Display
For monitoring and control

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Good Sleep off Timer
For comfort during sleep

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	ATKM35XV16VAA	ATKM50XV16MKA	ATKM53XV16MAA	ATKM60XV16MAA
	ODU	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
ISEER Rating	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
IDU Colour		White with Dark Blue Décor Strip	White with Dark Blue Décor Strip	White with Dark Blue Décor Strip	White with Dark Blue Décor Strip

SPECIAL FILTERS



Apataito Filter
Helps to remove airborne particles and odour

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

MTKM 5★

PREMIUM SERIES

INVERTER R-32

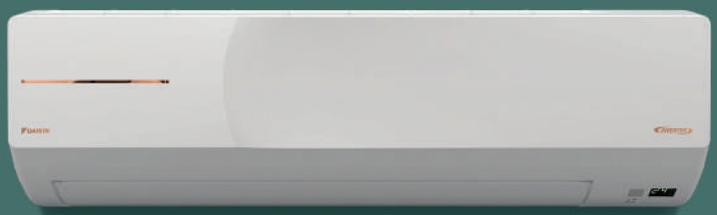

KEY FEATURES

Available in Cooling (kW): 3.5, 5.0, 5.28, 6.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

*Triple Display
For monitoring and control

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Smell Proof Operation
Removes unpleasant odors

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	MTKM35XV16VAA	MTKM50XV16MKA	MTKM53XV16MAA	MTKM60XV16MAA
	ODU	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
ISEER Rating	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
IDU Colour		White with Rose Gold Décor Strip	White with Rose Gold Décor Strip	White with Rose Gold Décor Strip	White with Rose Gold Décor Strip

SPECIAL FILTERS



Vitamin C Filter

Filters contains vitamin C (Ascorbic Acid that remove the harmful chemicals and toxins)

PM 2.5 Filter

Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTKM 5★

PREMIUM SERIES

INVERTER R-32

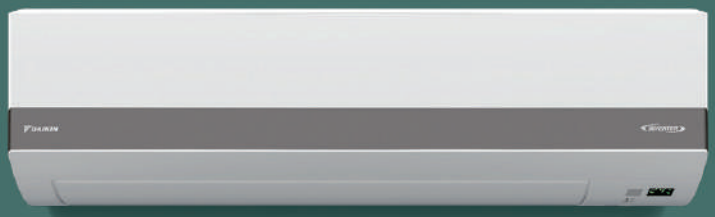

KEY FEATURES

Available in Cooling (kW): 3.50, 5.0, 5.28, 6.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

Good Sleep off Timer
For comfort during sleep

Triple Display
For monitoring and control

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTKM35XV16VAA	GTKM50XV16MKA	GTKM53XV16MAA	GTKM60XV16MAA
	ODU	RKMG35XV16VAA	RKMG50XV16MKA	RKMG53XV16MAA	RKMG60XV16MAA
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.00
ISEER Rating	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKU 5★

STANDARD SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.50, 4.22, 5.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

Good Sleep off Timer
For comfort during sleep

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

***Triple Display**
For monitoring and control

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKU35XV16VAA	FTKU42XV16UKA	FTKU50XV16MKA
	ODU	RKU35XV16VAA	RKU42XV16UKA	RKU50XV16MKA
Rated Cooling Capacity	kW	3.50	4.22	5.00
ISEER Rating	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	573.05	678.92
IDU Colour		White with Rose Gold Décor Strip	White with Rose Gold Décor Strip	White with Rose Gold Décor Strip

SPECIAL FILTERS

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.
Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTKU 5★

STANDARD SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.50, 4.22, 5.0

ISEER 5.70 RATING
ISEER 5.70
Saves money by higher ISEER Value 5.70

Dew Clean Technology
For better airflow & consistent cooling

55°C
Cools upto 55°C
Comfortable cooling at extreme conditions

Good Sleep off Timer
For comfort during sleep

22 Meters Airflow
Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

Triple Display
For monitoring and control

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Filter Clean Indicator
Ensures timely filter upkeep

SELF
Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTKU35XV16VAA	GTKU42XV16UKA	GTKU50XV16MKA
	ODU	RKUG35XV16VAA	RKUG42XV16UKA	RKUG50XV16MKA
Rated Cooling Capacity	kW	3.50	4.22	5.00
ISEER Rating	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	573.05	678.92
IDU Colour		White with Rose Gold Décor Strip	White with Rose Gold Décor Strip	White with Rose Gold Décor Strip

*Note: Air Throw given for 5.0 kW & above capacity models only. Ambient temperature mentioned for all 5 star models

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTXF 4☆

HOT & COLD SERIES

INVERTER R-32

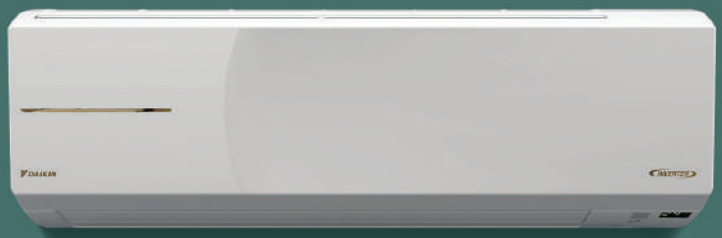

KEY FEATURES

Available in Heating (kW): 5.5
Available in Cooling (kW): 5.0

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

Power Full
Immediate relief from hot & cold temperature

***Triple Display**
For monitoring and control

Air Throw 16 Mtr (52 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Heating & Cooling Function Operation -15°C to 54°C
Heating and cooling for year around comfort

Filter Clean Indicator
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTXF50XV16VAA
	ODU	RXF50XV16VAA
Rated Cooling Capacity	kW	5.0 / 5.5
ISEER Rating	Wh/Wh	5.20
Rated Annual Power Consumption	kWh	743.95
IDU Colour		White with Gold Décor Strip

SPECIAL FILTERS

CO_2 Filter and Cetachin
Traps odours through adsorption

PM 1.0 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTHT 3☆

HOT & COLD SERIES

INVERTER R-32

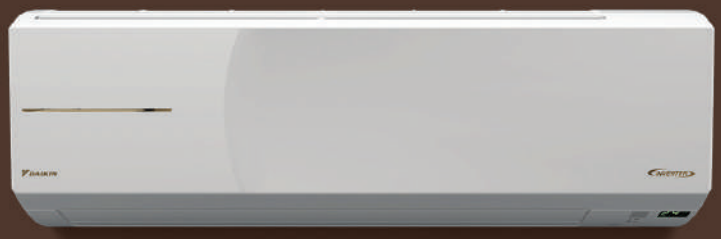

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0, 7.03
Available in Heating (kW): 3.52, 5.0, 6.0, 7.03

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Power Full
Immediate relief from hot & cold temperature

Air Throw 22 Mtr (72 Ft)*
22 Meters Airflow
Uniform and faster cooling

3D Airflow
For uniform cooling

Heating & Cooling Function Operation -10°C to 54°C
Heating and cooling for year around comfort

Filter Clean
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTHT35XV16WAA	FTHT50XV16VAA	FTHT60XV16UAA	FTHT71XV16MAA
	ODU	RHT35XV16WAA	RHT50XV16VAA	RHT60XV16UAA	RHT71XV16MAA
Rated Cooling Capacity	kW	3.52 / 3.52	5.0 / 5.0	6.0 / 6.0	7.03 / 7.03
ISEER Rating	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.02	880.10	1055.07	1238.03
IDU Colour		White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip

SPECIAL FILTERS



CO_2 Filter and Cetachin
Traps odours through adsorption

PM 1.0 Filter
Helps to improve air quality

*Note: Air Throw given for 7.03 kW.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTHT 3★

HOT & COLD SERIES

INVERTER R-32

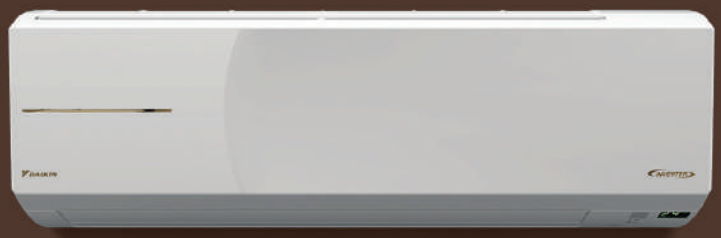

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0, 7.03
Available in Heating (kW): 3.52, 5.0, 6.0, 7.03

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

Triple Display
For monitoring and control

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Air Throw 22 Mtr (72 Ft)*
22 Meters Airflow
Uniform and faster cooling

Power Full
Immediate relief from hot & cold temperature

Heating & Cooling Function Operation -10°C to 54°C
Auto Heating and cooling for year around comfort

Filter Clean Indicator
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTHT35XV16WAA	GTHT50XV16VAA	GTHT60XV16UAA	GTHT71XV16MAA
	ODU	RHTG35XV16WAA	RHTG50XV16VAA	RHTG60XV16UAA	RHTG71XV16MAA
Rated Cooling Capacity	kW	3.52 / 3.52	5.0 / 5.0	6.0 / 6.0	7.03 / 7.03
ISEER Rating	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.02	880.1	1055.07	1238.03
IDU Colour		White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip

*Note: Air Throw given for 7.03 kW.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKN3☆

WI-FI SERIES

INVERTER R-32

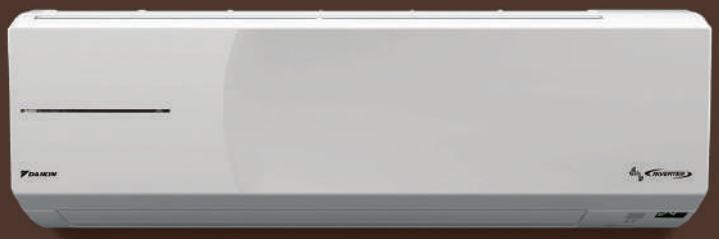

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0

Mobile App Control
Control from any corner of the world through mobile App

Dew Clean Technology
For better airflow & consistent cooling

Cools upto 52°C
Comfortable cooling at extreme conditions

Voice Control with Smart Speaker
Voice Controlled via Amazon Alexa & Google Home

Air Throw 16 Mtr (52 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Filter Clean Indicator
Ensures timely filter upkeep

***Triple Display**
For monitoring and control

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKN35XV16WAA	FTKN50XV16VKA
	ODU	RKL35XV16WAA	RKL50XV16VKA
Rated Cooling Capacity	kW	3.52	5.0
ISEER Rating	Wh/Wh	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.10
IDU Colour		White with Black Décor Strip	White with Black Décor Strip

SPECIAL FILTERS

PM 1.0 Filter
Helps to improve air quality



Apataito Filter
Helps to remove airborne particles and odour

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKL 3★

PREMIUM SERIES

INVERTER R-32

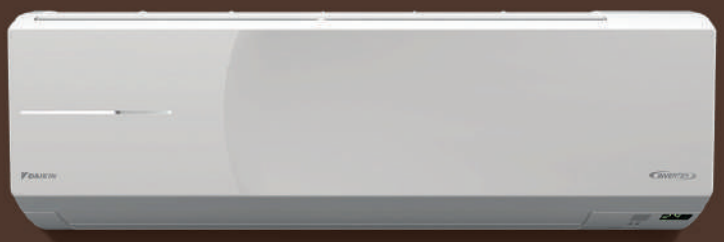

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Dry Mode Function
Enhance comfort by reducing excessive humidity

Air Throw 16 Mtr (52 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Power Chill
Immediate relief from hot temperature

Filter Clean
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKL35XV16WAA	FTKL50XV16VKA/VAA/UAA	FTKL60XV16VAA
	ODU	RKL35XV16WAA	RKL50XV16VKA/VAA/UAA	RKL60XV16VAA
Rated Cooling Capacity	kW	3.52	5.0	6.0
ISEER Rating	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1	1055.07
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

SPECIAL FILTERS



Active Carbon Filter
Helps to remove VOCs and odour

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKL 3★

PREMIUM SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 7.03, 9.15

Cools upto 52°C
Comfortable cooling at extreme conditions

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Dry Mode Function
Enhance comfort by reducing excessive humidity

Air Throw 25 Mtr (82 Ft)*
Uniform and faster cooling

3D Airflow
For uniform cooling

Power Chill
Immediate relief from hot temperature

Filter Clean
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKL71XV16MAA	FTKL90XV16LAA
	ODU	RKL71XV16MAA	RKL90XV16LAA
Rated Cooling Capacity	kW	7.03	9.15
ISEER Rating	Wh/Wh	4.40	4.80
Rated Annual Power Consumption	kWh	1238.03	1476.47
IDU Colour		Premium White	Premium White

SPECIAL FILTERS



Active Carbon Filter
Helps to remove VOCs and odour

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 9.15 kW model only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTKL 3☆

PREMIUM SERIES

INVERTER R-32

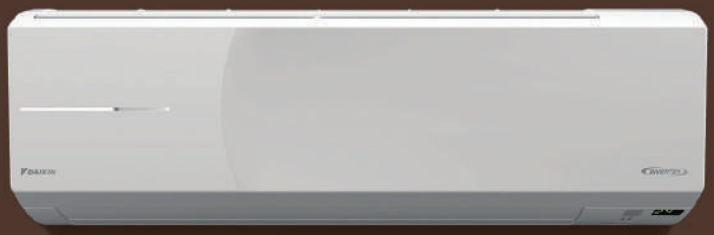

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0, 7.03

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Dry Mode Function
Enhance comfort by reducing excessive humidity

Air Throw 22 Mtr (72 Ft)*
22 Meters Airflow
Uniform and faster cooling

Power Chill
Immediate relief from hot temperature

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Filter Clean
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTKL35XV16WAA	GTKL50XV16VKA/VAA/UAA	GTKL60XV16VAA	GTKL71XV16MAA
	ODU	RKLG35XV16WAA	RKLG50XV16VKA/VAA/UAA	RKLG60XV16VAA	RKLG71XV16MAA
Rated Cooling Capacity	kW	3.52	5.0	6.0	7.03
ISEER Rating	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.10	1055.07	1238.03
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

*Note: Air Throw given for 7.03 kW. Product image for 7.03 kW model is different.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

ATKL 3★
PREMIUM SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0

Good Sleep off Timer For comfort during sleep	**Dew Clean Technology** For better airflow & consistent cooling	***Triple Display** For monitoring and control
Dry Mode Function Enhance comfort by reducing excessive humidity	**Air Throw 16 Mtr (52 Ft)*** Uniform and faster cooling	**3D Airflow** For uniform cooling
Power Chill Immediate relief from hot temperature	**Filter Clean** Ensures timely filter upkeep	**Self Diagnosis** For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	ATKL35XV16WAA	ATKL50XV16VKA/VAA/UAA	ATKL60XV16VAA
	ODU	RKL35XV16WAA	RKL50XV16VKA/VAA/UAA	RKL60XV16VAA
Rated Cooling Capacity	kW	3.52	5.0	6.0
ISEER Rating	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.10	1055.07
IDU Colour		Premium White	Premium White	Premium White

SPECIAL FILTERS

PM 2.5 Filter
Helps to improve air quality



Apataito Filter
Helps to remove airborne particles and odour

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

MTKL 3☆

PREMIUM SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Dry Mode Function
Enhance comfort by reducing excessive humidity

Air Throw 16 Mtr (52 Ft)*
16 Meters Airflow
Uniform and faster cooling

3D Airflow
For uniform cooling

Power Chill
Immediate relief from hot temperature

Filter Clean Indicator
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	MTKL35XV16WAA	MTKL50XV16VKA/VAA/UAA
	ODU	RKL35XV16WAA	RKL50XV16VAA/UAA
Rated Cooling Capacity	kW	3.52	5.0
ISEER Rating	Wh/Wh	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.10
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip

SPECIAL FILTERS



Vitamin C Filter
Filters contains Vitamin C (Ascorbic Acid) that remove the harmful chemicals and toxins

PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

FTKC 3★

STANDARD SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.52, 4.8, 5.0

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

***Triple Display**
For monitoring and control

Dry Mode Function
Enhance comfort by reducing excessive humidity

Power Chill
Immediate relief from hot temperature

Econo Mode
Reduces energy consumption

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Filter Clean
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	FTKC35XV16WAA/WDA	FTKC48XV16VKA/VNA/VLA	FTKC50XV16VKA/VNA/VLA/UKA
	ODU	RKC35XV16WAA/WDA	RKC48XV16VKA/VNA/VLA	RKC50XV16VKA/VNA/VLA/UKA
Rated Cooling Capacity	kW	3.52	4.8	5.0
ISEER Rating	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	845.02	880.10
IDU Colour		Premium White	Premium White	Premium White

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTKC 3☆
STANDARD SERIES

INVERTER R-32

KEY FEATURES

Available in Cooling (kW): 3.52, 4.8, 5.0

Good Sleep off Timer For comfort during sleep	**Dew Clean Technology** For better airflow & consistent cooling	***Triple Display** For monitoring and control
Dry Mode Function Enhance comfort by reducing excessive humidity	**Power Chill** Immediate relief from hot temperature	**Econo Mode** Reduces energy consumption
Inner Grooved Pipe Oscillatory Refrigerant motion for better heat dissipation	**Filter Clean Indicator** Ensures timely filter upkeep	**Self Diagnosis** For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTKC35XV16WAA/WDA	GTKC48XV16VKA/VNA/VLA	GTKC50XV16VKA/VNA/VLA/UKA
	ODU	RKCG35XV16WAA/WDA	RKCG48XV16VKA/VNA/VLA	RKCG50XV16VKA/VNA/VLA/UKA
Rated Cooling Capacity	kW	3.52	4.8	5.0
ISEER Rating	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	845.02	880.10
IDU Colour		Premium White	Premium White	Premium White

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

NON-INVERTER SPLIT AIR CONDITIONER FEATURES

5 YEARS WARRANTY ON COMPRESSOR	Long term assurance
POWER-AIRFLOW DUAL FLAPS	Even Airflow distribution across all corners
1 YEARS COMPREHENSIVE WARRANTY ON MACHINE	Additional peace of mind
PATENTED DNNS COATING	COPPER Enhanced durability
STABILIZER FREE	Low cost maintenance
SMELL PROOF OPERATION	No odours, just comfort
ECONO MODE	Reduces energy consumption
COANDA AIRFLOW	Even airflow distribution to every corner of the room

FTQ 2☆
STANDARD SERIES

R-32

KEY FEATURES

Available in Cooling (kW): 2.8, 2.93, 3.35, 5.05

Smell Proof Operation
IDU heat exchanger cooled by fan for fresh air supply all time

Air Throw 16 Mtr (52 Ft)*
16 Meters Airflow
Uniform and faster cooling

Cools upto 50°C
Immediate relief from hot temperature

Dry Mode Function
Enhance comfort by reducing excessive humidity

Good Sleep Off Timer
For comfort during sleep

Econo Mode
ECONO
Reduces energy consumption

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

PRODUCT DETAILS

Model Name	IDU	FTQ28XV16WBA/WBB	FTQ30XV16VBA/VBB	FTQ35XV16WBA/WBB	FTQ50XV16VCA/VCB/UCA/UCB/VDA/VBD/UDA/UDB
	ODU	RQ28XV16WBA	RQ30XV16VBA	RQ35XV16WBA	RQ50XV16VCA/UCA/VDA/UDA
Rated Cooling Capacity	kW	2.8	2.93	3.35	5.05
ISEER Rating	Wh/Wh	3.90	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	555.81	582.13	664.96	1002.47
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

SPECIAL FILTERS



PM 2.5 Filter
Helps to improve air quality

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

GTQ2☆

STANDARD SERIES

R-32

KEY FEATURES

Available in Cooling (kW): 2.8, 2.93, 3.35, 5.05

Smell Proof Operation
IDU heat exchanger cooled by fan for fresh air supply all time

Air Throw 16 Mtr (52 Ft)*
16 Meters Airflow
Uniform and faster cooling

Cools upto 50°C
Immediate relief from hot temperature

Dry Mode Function
Enhance comfort by reducing excessive humidity

Good Sleep Off Timer
For comfort during sleep

Econo Mode
ECONO
Reduces energy consumption

Inner Grooved Pipe
Oscillatory Refrigrant motion for better heat dissipation

PRODUCT DETAILS

Model Name	IDU	GTQ28XV16WBA/WBB	GTQ30XV16VBA/VBB	GTQ35XV16WBA/WBB	GTQ50XV16VCA/VCB/UCA/UCB/VDA/VDB/UDA/UDB
	ODU	RQG28XV16WBA	RQG30XV16VBA	RQG35XV16WBA	RQG50XV16VCA/UCA/VDA/UDA
Rated Cooling Capacity	kW	2.8	2.93	3.35	5.05
ISEER Rating	Wh/Wh	3.90	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	555.81	582.13	664.96	1002.47
IDU Colour		White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip	White with Silver Décor Strip

*Note: Air Throw given for 5.0 kW & above capacity models only.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (JTKJ)

Model name	Indoor unit (IDU)	JTKJ35XV16VAA	JTKJ53XV16MAA	JTKJ60XV16MAA
	Outdoor unit (ODU)	RKJ35XV16VAA	RKJ53XV16MAA	RKJ60XV16MAA
Star Rating*		5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.5	5.28	6.0
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~6.0	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	716.97	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	713 / 20.2	752 / 21.3
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.93	6.54
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	✓	✓	✓
	Intelligent Eye (Energy Saver and Auto ON/OFF)	✓	✓	✓
	Smart phone app control (Wi-Fi)	✓	✓	✓
	Voice Control (Amazon Alexa and Google Home)	✓	✓	✓
	3D Air Flow	✓	✓	✓
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM1.0	PM1.0	PM1.0
	Special filter 2	X	X	X
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 892 x 231	325 x 1065 x 280	325 x 1065 x 280
	ODU	550 x 675 x 284	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKF)

Model name	Indoor unit (IDU)	FTKF35XV16MAA	FTKF50XV16MAA	FTKF60XV16LAA
	Outdoor unit (ODU)	RKF35XV16MAA	RKF50XV16MAA	RKF60XV16LAA
Star Rating*		5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	6.0
Cooling Capacity (Min. ~ Max)	kW	1.5~5.0	2.0~6.0	2.4~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	6.60	6.30	6.00
Rated Annual Power Consumption	kWh	413.07	614.76	774.15
Air Flow Rate (Cooling /Heating)	CFM / CMM	607 / 17.2	671 / 19.0	886.4 / 23.0
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	30	31	37
Operating Current (Cooling/Heating)	A	3.17	4.91	5.92
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	X	X	X
	Intelligent Eye (Energy Saver and Auto ON/OFF)	X	X	X
	Smart phone app control (Wi-Fi)	X	X	X
	Voice Control (Amazon Alexa and Google Home)	X	X	X
	3D Air Flow	✓	✓	✓
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM1.0	PM1.0	PM1.0
	Special filter 2	3 Layer Filter	3 Layer Filter	3 Layer Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	25/20	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	325 x 1060 x 278	325 x 1060 x 278	325 x 1220 x 278
	ODU	595 x 845 x 300	695 x 930 x 350	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKR)

Model name	Indoor unit (IDU)	FTKR35XV16VAA	FTKR50XV16MKA	FTKR60XV16MAA
	Outdoor unit (ODU)	RKR35XV16VAA	RKR50XV16MKA	RKR60XV16MAA
Star Rating*		5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.5	5.00	6.0
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~5.9	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	685/19.4	752 / 21.3
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.51	6.54
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	✓	✓	✓
	Voice Control (Amazon Alexa and Google Home)	✓	✓	✓
	3D Air Flow	✓	✓	✓
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	X	X	X
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 892 x 231	325 x 1065 x 280	325 x 1065 x 280
	ODU	550 x 675 x 284	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKM)

Model name	Indoor unit (IDU)	FTKM35XV16VAA	FTKM50XV16MKA	FTKM53XV16MAA	FTKM60XV16MAA
	Outdoor unit (ODU)	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Star Rating*		5 Star	5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~5.90	1.58~6.0	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	685 / 19.4	713 / 20.2	752 / 21.3
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.51	5.93	6.54
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5	PM2.5
	Special filter 2	Active Carbon	Active Carbon	Active Carbon	Active Carbon
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 892 x 231	325 x 1065 x 280	325 x 1065 x 280	325 x 1065 x 280
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (ATKM)

Model name	Indoor unit (IDU)	ATKM35XV16VAA	ATKM50XV16MKA	ATKM53XV16MAA	ATKM60XV16MAA
	Outdoor unit (ODU)	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Star Rating*		5 Star	5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~5.90	1.58~6.0	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	685 / 19.4	713 / 20.2	752 / 21.3
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.51	5.93	6.54
	Patented Swing Compressor	✓	✓	✓	✓
Key USPs	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5	PM2.5
	Special filter 2	Apataito Filter	Apataito Filter	Apataito Filter	Apataito Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 892 x 231	325 x 1065 x 280	325 x 1065 x 280	325 x 1065 x 280
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (MTKM)

Model name	Indoor unit (IDU)	MTKM35XV16VAA	MTKM50XV16MKA	MTKM53XV16MAA	MTKM60XV16MAA
	Outdoor unit (ODU)	RKM35XV16VAA	RKM50XV16MKA	RKM53XV16MAA	RKM60XV16MAA
Star Rating*		5 Star	5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.0
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~5.90	1.58~6.0	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	685 / 19.4	713 / 20.2	752 / 21.3
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.51	5.93	6.54
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5	PM2.5
	Special filter 2	Vitamin C Filter	Vitamin C Filter	Vitamin C Filter	Vitamin C Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239	325 x 1060 x 284	325 x 1060 x 284	325 x 1060 x 284
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKM)

Model name	Indoor unit (IDU)	GTKM35XV16VAA	GTKM50XV16MKA	GTKM53XV16MAA	GTKM60XV16MAA
	Outdoor unit (ODU)	RKMG35XV16VAA	RKMG50XV16MKA	RKMG53XV16MAA	RKMG60XV16MAA
Star Rating*		5 Star	5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.50	5.00	5.28	6.00
Cooling Capacity (Min. ~ Max)	kW	1.00~4.3	1.58~5.90	1.58~6.0	2.0~7.0
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	678.92	716.97	814.17
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	685 / 19.4	713 / 20.2	752 / 21.3
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31	31
Operating Current (Cooling/Heating)	A	3.80	5.51	5.93	6.54
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	x	x	x	x
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	x	x	x	x
	Special filter 2	x	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 892 x 231	325 x 1065 x 280	325 x 1065 x 280	325 x 1065 x 280
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKU)

Model name	Indoor unit (IDU)	FTKU35XV16VAA	FTKU42XV16UKA	FTKU50XV16MKA
	Outdoor unit (ODU)	RKU35XV16VAA	RKU42XV16UKA	RKU50XV16MKA
Star Rating*		5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.50	4.22	5.00
Cooling Capacity (Min. ~ Max)	kW	1.0~4.3	1.5~5.5	1.58~5.90
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	573.05	678.92
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	494 / 14	685 / 19.4
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31
Operating Current (Cooling/Heating)	A	3.80	4.51	5.51
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	X	X	X
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239	298x 885 x 239	325x 1060 x 284
	ODU	550x675x284	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKU)

Model name	Indoor unit (IDU)	GTKU35XV16VAA	GTKU42XV16UKA	GTKU50XV16MKA
	Outdoor unit (ODU)	RKUG35XV16VAA	RKUG42XV16UKA	RKUG50XV16MKA
Star Rating*		5 Star	5 Star	5 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.50	4.22	5.00
Cooling Capacity (Min. ~ Max)	kW	1.0~4.3	1.5~5.5	1.58~5.90
100% Cooling Capacity Temperature	°C	46°C	46°C	46°C
Rated ISEER	Wh/Wh	5.70	5.70	5.70
Rated Annual Power Consumption	kWh	475.37	573.05	678.92
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	494 / 14	685 / 19.4
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	10°C~55°C	10°C~55°C	10°C~55°C
Minimum IDU Sound Level	(dBA)	31	31	31
Operating Current (Cooling/Heating)	A	3.80	4.51	5.51
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	X	X	X
	Special filter 2	X	X	X
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239	298 x 885 x 239	325 x 1060 x 284
	ODU	550x675x284	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTXF)

Model name	Indoor unit (IDU)	FTXF50XV16VAA
	Outdoor unit (ODU)	RXF50XV16VAA
Star Rating*		4 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓
Rated Cooling Capacity	kW	5.0
Rated Heating Capacity	kW	5.5
Cooling Capacity (Min. ~ Max)	kW	1.5~5.75
Heating Capacity (Min. ~ Max)	kW	1.3~6.6
100% Cooling Capacity Temperature	°C	46°C
Rated ISEER	Wh/Wh	5.20
Rated Annual Power Consumption	kWh	743.95
Air Flow Rate (Cooling /Heating)	CFM / CMM	572.1 / 14.9
Voltage Range	V	130~285
Ambient Temperature Range	Cooling(Min~Max)	-10°C~54°C
	Heating(Min~Max)	-15°C~24°C
Minimum IDU Sound Level	(dBA)	32
Operating Current (Cooling/Heating)	A	5.63 / 5.77
Key USPs	Patented Swing Compressor	✓
	Patented Streamer Discharge	X
	Intelligent Eye (Energy Saver and Auto ON/OFF)	X
	Smart phone app control (Wi-Fi)	X
	Voice Control (Amazon Alexa and Google Home)	X
	3D Air Flow	✓
	Triple Display	✓
	Power Airflow Dual Flaps	✓
	Power Chill	Power full
	Econo Mode	✓
	Remote Backlit	✓
	Dew Clean	✓
	Hepta Sense	✓
	Self Diagnosis	✓
	Stabilizer Inside	✓
	Filter Clean Indicator	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓
	Smell Proof Operation	✓
	Special filter 1	PM1.0
	Special filter 2	CO_2 Filter & Cetachin
Anti corrosion	Patented DNNS Coating	✓
	BTA Oil Treatment	✓
	Blue Fin Coating for ODU	✓
Safety	Multi Layer Fire Safety	✓
Controls	Display Off Function	✓
	IDU LED Brightness Control	✓
	Child Lock	✓
Piping length	(Max Length/Max Height) m	30/16
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239
	ODU	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTHT)

Model name	Indoor unit (IDU)	FTHT35XV16WAA	FTHT50XV16VAA	FTHT60XV16UAA	FTHT71XV16MAA
	Outdoor unit (ODU)	RHT35XV16WAA	RHT50XV16VAA	RHT60XV16UAA	RHT71XV16MAA
Star Rating*		3 Star	3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	6.0	7.03
Rated Heating Capacity	kW	3.52	5.0	6.0	7.03
Cooling Capacity (Min. ~ Max)	kW	1.00~3.79	1.4~5.3	1.75~6.5	1.4~7.2
Heating Capacity (Min. ~ Max)	kW	1.2~3.79	1.6~5.3	1.3~6.2	2.0~7.1
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.02	880.1	1055.07	1238.03
Air Flow Rate (Cooling /Heating)	CFM / CMM	(392/11.1) (420/11.9)	(526/14.9) (572/16.2)	(540/15.3) (586/16.6)	(742/21) (777/22)
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~54°C	16°C~54°C	16°C~54°C	16°C~54°C
	Heating(Min~Max)	-10°C~24°C	-10°C~24°C	-10°C~24°C	-10°C~24°C
Minimum IDU Sound Level	(dBA)	27	32	32	34
Operating Current (Cooling/Heating)	A	5.03 / 4.26	7.17 /6.54	8.29 / 8.29	10.01 / 8.87
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	Power full	Power full	Power full	Power full
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM1.0	PM1.0	PM1.0	PM1.0
	Special filter 2	CO_2 Filter & Cetachin	CO_2 Filter & Cetachin	CO_2 Filter & Cetachin	CO_2 Filter & Cetachin
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	25/20	30/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 239	298 x 885 x 239	298 x 885 x 239	325 x 1060 x 284
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTHT)

Model name	Indoor unit (IDU)	GTHT35XV16WAA	GTHT50XV16VAA	GTHT60XV16UAA	GTHT71XV16MAA
	Outdoor unit (ODU)	RHTG35XV16WAA	RHTG50XV16VAA	RHTG60XV16UAA	RHTG71XV16MAA
Star Rating*		3 Star	3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	6.0	7.03
Rated Heating Capacity	kW	3.52	5.0	6.0	7.03
Cooling Capacity (Min. ~ Max)	kW	1.00 ~ 3.79	1.4~5.3	1.75~6.5	1.4~7.2
Heating Capacity (Min. ~ Max)	kW	1.2~3.79	1.6~5.3	1.3~6.2	2.0~7.1
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.02	880.1	1055.07	1238.03
Air Flow Rate (Cooling /Heating)	CFM / CMM	(392/11.1) (420/11.9)	(526/14.9) (572/16.2)	(540/15.3) (586/16.6)	(742/21) (777/22)
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~54°C	16°C~54°C	16°C~54°C	16°C~54°C
	Heating(Min~Max)	-10°C~24°C	-10°C~24°C	-10°C~24°C	-10°C~24°C
Minimum IDU Sound Level	(dBA)	27	32	32	34
Operating Current (Cooling/Heating)	A	5.03 / 4.26	7.17 /6.54	8.29 / 8.29	10.01 / 8.87
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	x	x	x	x
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	Power full	Power full	Power full	Power full
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	x	x	x	x
	Special filter 2	x	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	25/20	30/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 239	298 x 885 x 239	298 x 885 x 239	325 x 1060 x 284
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKN)

Model name	Indoor unit (IDU)	FTKN35XV16WAA	FTKN50XV16VKA
	Outdoor unit (ODU)	RKL35XV16WAA	RKL50XV16VKA
Star Rating*		3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓
Rated Cooling Capacity	kW	3.52	5.0
Cooling Capacity (Min. ~ Max)	kW	1.0~3.79	1.40~5.30
100% Cooling Capacity Temperature	°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	551 / 15.6
Voltage Range	V	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	27	32
Operating Current (Cooling/Heating)	A	4.95	7.17
Key USPs	Patented Swing Compressor	✓	✓
	Patented Streamer Discharge	X	X
	Intelligent Eye (Energy Saver and Auto ON/OFF)	X	X
	Smart phone app control (Wi-Fi)	✓	✓
	Voice Control (Amazon Alexa and Google Home)	✓	✓
	3D Air Flow	✓	✓
	Triple Display	✓	✓
	Power Airflow Dual Flaps	✓	✓
	Power Chill	✓	✓
	Econo Mode	✓	✓
	Remote Backlit	✓	✓
	Dew Clean	✓	✓
	Hepta Sense	✓	✓
	Self Diagnosis	✓	✓
	Stabilizer Inside	✓	✓
	Filter Clean Indicator	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓
	Smell Proof Operation	✓	✓
	Special filter 1	PM1.0	PM1.0
	Special filter 2	Apataito Filter	Apataito Filter
Anti corrosion	Patented DNNS Coating	✓	✓
	BTA Oil Treatment	✓	✓
	Blue Fin Coating for ODU	✓	✓
Safety	Multi Layer Fire Safety	✓	✓
Controls	Display Off Function	✓	✓
	IDU LED Brightness Control	✓	✓
	Child Lock	✓	✓
Piping length	(Max Length/Max Height) m	15/12	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 239	298 x 885 x 239
	ODU	550 x 675 x 284	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKL)

Model name	Indoor unit (IDU)	FTKL35XV16WAA	FTKL50XV16VKA	FTKL50XV16VAA	FTKL50XV16UAA
	Outdoor unit (ODU)	RKL35XV16WAA	RKL50XV16VKA	RKL50XV16VAA	RKL50XV16UAA
Star Rating*		3 Star	3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.0~3.79	1.40~5.30	1.40~5.30	1.75~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	551 / 15.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	27	32	32	32
Operating Current (Cooling/Heating)	A	4.95	7.17	7.17	7.17
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5	PM2.5
	Special filter 2	Active Carbon Filter	Active Carbon Filter	Active Carbon Filter	Active Carbon Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ9.5 & φ6.4 (3/8" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 239	298 x 885 x 239	298 x 885 x 239	298 x 885 x 239
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKL)

Model name	Indoor unit (IDU)	FTKL60XV16VAA	FTKL71XV16MAA	FTKL90XV16LAA
	Outdoor unit (ODU)	RKL60XV16VAA	RKL71XV16MAA	RKL90XV16LAA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	6.0	7.03	9.15
Cooling Capacity (Min. ~ Max)	kW	1.75~6.30	1.4~7.5	2.4~9.5
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.80
Rated Annual Power Consumption	kWh	1055.07	1238.03	1476.47
Air Flow Rate (Cooling /Heating)	CFM / CMM	597 / 16.9	742 / 21	812 / 23
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	37
Operating Current (Cooling/Heating)	A	8.29	10.01	11.8
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	✓	✓	✓
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	Active Carbon Filter	Active Carbon Filter	Active Carbon Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	25/20	30/20	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 9.5 (1/2" &3/8")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239	325 x 1060 x 278	325 x 1220 x 278
	ODU	595 x 845 x 300	595 x 845 x 300	695 x 930 x 350

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKL)

Model name	Indoor unit (IDU)	GTKL35XV16WAA	GTKL50XV16VKA	GTKL50XV16VAA
	Outdoor unit (ODU)	RKLG35XV16WAA	RKLG50XV16VKA	RKLG50XV16VAA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.0~3.79	1.40~5.30	1.40~5.30
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	27	32	32
Operating Current (Cooling/Heating)	A	4.95	7.17	7.17
	Patented Swing Compressor	✓	✓	✓
Key USPs	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 239	298 x 885 x 239	298 x 885 x 239
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKL)

Model name	Indoor unit (IDU)	GTKL50XV16UAA	GTKL60XV16VAA	GTKL71XV16MAA
	Outdoor unit (ODU)	RKLG50XV16UAA	RKLG60XV16VAA	RKLG71XV16MAA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	5.0	6.0	7.03
Cooling Capacity (Min. ~ Max)	kW	1.75~5.3	1.75~6.30	1.4~7.5
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	880.1	1055.07	1238.03
Air Flow Rate (Cooling /Heating)	CFM / CMM	551 / 15.6	597 / 16.9	742 / 21
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	32
Operating Current (Cooling/Heating)	A	7.17	8.29	10.01
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	25/20	30/20
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 239	298 x 885 x 239	325 x 1060 x 278
	ODU	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (ATKL)

Model name	Indoor unit (IDU)	ATKL35XV16WAA	ATKL50XV16VKA	ATKL50XV16VAA
	Outdoor unit (ODU)	RKL35XV16WAA	RKL50XV16VKA	RKL50XV16VAA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.00~3.79	1.40~5.30	1.40~5.30
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	27	32	32
Operating Current (Cooling/Heating)	A	4.95	7.17	7.17
Key USPs	Patented Swing Compressor	✓	✓	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	✓	✓	✓
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	✓	✓	✓
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	Apataito Filter	Apataito Filter	Apataito Filter
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ9.5 & φ6.4 (3/8" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 821 x 235	298 x 906 x 235	298 x 906 x 235
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (ATKL)

Model name	Indoor unit (IDU)	ATKL50XV16UAA	ATKL60XV16VAA
	Outdoor unit (ODU)	RKL50XV16UAA	RKL60XV16VAA
Star Rating*		3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓
Rated Cooling Capacity	kW	5.0	6.0
Cooling Capacity (Min. ~ Max)	kW	1.75~5.3	1.75~6.30
100% Cooling Capacity Temperature	°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40
Rated Annual Power Consumption	kWh	880.1	1055.07
Air Flow Rate (Cooling /Heating)	CFM / CMM	551 / 15.6	597 / 16.9
Voltage Range	V	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	32	32
Operating Current (Cooling/Heating)	A	7.17	8.29
Key USPs	Patented Swing Compressor	✓	✓
	Patented Streamer Discharge	X	X
	Intelligent Eye (Energy Saver and Auto ON/OFF)	X	X
	Smart phone app control (Wi-Fi)	X	X
	Voice Control (Amazon Alexa and Google Home)	X	X
	3D Air Flow	✓	✓
	Triple Display	✓	✓
	Power Airflow Dual Flaps	✓	✓
	Power Chill	✓	✓
	Econo Mode	✓	✓
	Remote Backlit	✓	✓
	Dew Clean	✓	✓
	Hepta Sense	✓	✓
	Self Diagnosis	✓	✓
	Stabilizer Inside	✓	✓
	Filter Clean Indicator	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓
	Smell Proof Operation	✓	✓
	Special filter 1	PM2.5	PM2.5
	Special filter 2	Apataito Filter	Apataito Filter
Anti corrosion	Patented DNNS Coating	✓	✓
	BTA Oil Treatment	✓	✓
	Blue Fin Coating for ODU	✓	✓
Safety	Multi Layer Fire Safety	✓	✓
Controls	Display Off Function	✓	✓
	IDU LED Brightness Control	✓	✓
	Child Lock	✓	✓
Piping length	(Max Length/Max Height) m	20/16	25/20
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 906 x 235	298 x 906 x 235
	ODU	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (MTKL)

Model name	Indoor unit (IDU)	MTKL35XV16WAA	MTKL50XV16VKA	MTKL50XV16VAA	MTKL50XV16UAA
	Outdoor unit (ODU)	RKL35XV16WAA	RKL50XV16VKA	RKL50XV16VAA	RKL50XV16UAA
Star Rating*		3 Star	3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓	✓
Rated Cooling Capacity	kW	3.52	5.0	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.00~3.79	1.40~5.30	1.40~5.30	1.75~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	880.1	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	551 / 15.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	16°C~52°C	16°C~52°C	16°C~52°C	16°C~52°C
Minimum IDU Sound Level	(dBA)	27	32	32	32
Operating Current (Cooling/Heating)	A	4.95	7.17	7.17	7.17
Key USPs	Patented Swing Compressor	✓	✓	✓	✓
	Patented Streamer Discharge	x	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x	x
	3D Air Flow	✓	✓	✓	✓
	Triple Display	✓	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓	✓
	Power Chill	✓	✓	✓	✓
	Econo Mode	✓	✓	✓	✓
	Remote Backlit	✓	✓	✓	✓
	Dew Clean	✓	✓	✓	✓
	Hepta Sense	✓	✓	✓	✓
	Self Diagnosis	✓	✓	✓	✓
	Stabilizer Inside	✓	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓	✓
	Smell Proof Operation	✓	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5	PM2.5
	Special filter 2	Vitamic C	Vitamic C	Vitamic C	Vitamic C
Anti corrosion	Patented DNNS Coating	✓	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓	✓
Controls	Display Off Function	✓	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓	✓
	Child Lock	✓	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 229	298 x 885 x 229	298 x 885 x 229	298 x 885 x 229
	ODU	550 x 675 x 284	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKC)

Model name	Indoor unit (IDU)	FTKC35XV16WAA	FTKC35XV16WDA	FTKC48XV16VKA
	Outdoor unit (ODU)	RKC35XV16WAA	RKC35XV16WDA	RKC48XV16VKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.52	3.52	4.8
Cooling Capacity (Min. ~ Max)	kW	1.0~3.79	1.3~3.79	1.50~5.2
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	619.31	845.02
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	445 / 12.6	547 / 15.5
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	27	27	32
Operating Current (Cooling/Heating)	A	4.95	4.95	6.95
Key USPs	Patented Swing Compressor	Swing	x	Swing
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	15/12	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 229	298 x 800 x 229	298 x 885 x 229
	ODU	550 x 675 x 284	550 x 675 x 284	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKC)

Model name	Indoor unit (IDU)	FTKC48XV16VNA	FTKC48XV16VLA	FTKC50XV16VKA
	Outdoor unit (ODU)	RKC48XV16VNA	RKC48XV16VLA	RKC50XV16VKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	4.8	4.8	5.0
Cooling Capacity (Min. ~ Max)	kW	1.9~5.2	1.9~5.2	1.5~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	845.02	845.02	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	547 / 15.5	547 / 15.5	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	32
Operating Current (Cooling/Heating)	A	6.95	6.95	7.17
Key USPs	Patented Swing Compressor	x	x	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298 x 885 x 229	298 x 885 x 229
	ODU	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTKC)

Model name	Indoor unit (IDU)	FTKC50XV16VNA	FTKC50XV16VLA	FTKC50XV16UKA
	Outdoor unit (ODU)	RKC50XV16VNA	RKC50XV16VLA	RKC50XV16UKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	5.0	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.9~5.3	1.9~5.3	1.5~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	880.1	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	551 / 15.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	32
Operating Current (Cooling/Heating)	A	7.17	7.17	7.17
Key USPs	Patented Swing Compressor	x	x	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298 x 885 x 229	298 x 885 x 229
	ODU	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKC)

Model name	Indoor unit (IDU)	GTKC35XV16WAA	GTKC35XV16WDA	GTKC48XV16VKA
	Outdoor unit (ODU)	RKCG35XV16WAA	RKCG35XV16WDA	RKCG48XV16VKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	3.52	3.52	4.8
Cooling Capacity (Min. ~ Max)	kW	1.0~3.79	1.3~3.79	1.50~5.2
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.31	619.31	845.02
Air Flow Rate (Cooling /Heating)	CFM / CMM	445 / 12.6	445 / 12.6	547 / 15.5
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	27	27	32
Operating Current (Cooling/Heating)	A	4.95	4.95	6.95
Key USPs	Patented Swing Compressor	Swing	x	Swing
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	15/12	15/12	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 229	298 x 800 x 229	298 x 885 x 229
	ODU	550 x 675 x 284	550 x 675 x 284	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKC)

Model name	Indoor unit (IDU)	GTKC48XV16VNA	GTKC48XV16VLA	GTKC50XV16VKA
	Outdoor unit (ODU)	RKCG48XV16VNA	RKCG48XV16VLA	RKCG50XV16VKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	4.8	4.8	5.0
Cooling Capacity (Min. ~ Max)	kW	1.9~5.2	1.9~5.2	1.5~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	845.02	845.02	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	547 / 15.5	547 / 15.5	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	32
Operating Current (Cooling/Heating)	A	6.95	6.95	7.17
Key USPs	Patented Swing Compressor	x	x	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298 x 885 x 229	298 x 885 x 229
	ODU	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTKC)

Model name	Indoor unit (IDU)	GTKC50XV16VNA	GTKC50XV16VLA	GTKC50XV16UKA
	Outdoor unit (ODU)	RKCG50XV16VNA	RKCG50XV16VLA	RKCG50XV16UKA
Star Rating*		3 Star	3 Star	3 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	5.0	5.0	5.0
Cooling Capacity (Min. ~ Max)	kW	1.9~5.3	1.9~5.3	1.5~5.3
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	880.1	880.1	880.1
Air Flow Rate (Cooling /Heating)	CFM / CMM	551 / 15.6	551 / 15.6	551 / 15.6
Voltage Range	V	130~285	130~285	130~285
Ambient Temperature Range	Cooling(Min~Max)	20°C~52°C	20°C~52°C	20°C~52°C
Minimum IDU Sound Level	(dBA)	32	32	32
Operating Current (Cooling/Heating)	A	7.17	7.17	7.17
Key USPs	Patented Swing Compressor	x	x	✓
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	✓	✓	✓
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	✓	✓	✓
	Hepta Sense	✓	✓	✓
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	✓	✓	✓
	Filter Clean Indicator	✓	✓	✓
Air Purification	Prefilter With Anti Bacterial Coating	✓	✓	✓
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	✓	✓	✓
	IDU LED Brightness Control	✓	✓	✓
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/16	20/16	20/16
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298 x 885 x 229	298 x 885 x 229
	ODU	595 x 845 x 300	595 x 845 x 300	595 x 845 x 300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTQ)

Model name	Indoor unit (IDU)	FTQ28XV16WBA/WBB	FTQ30XV16VBA/VBB	FTQ35XV16WBA/WBB
	Outdoor unit (ODU)	RQ28XV16WBA	RQ30XV16VBA	RQ35XV16WBA
Star Rating*		2 Star	2 Star	2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	2.8	2.93	3.35
Cooling Capacity (Min. ~ Max)	kW	x	x	x
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	555.81	582.13	664.96
Air Flow Rate (Cooling /Heating)	CFM / CMM	420 / 11.9	487 / 13.8	420 / 11.9
Voltage Range	V	160~264	160~264	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C	19.4°C~50°C	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	32	35	32
Operating Current (Cooling/Heating)	A	3.22	3.37	3.85
Key USPs	Patented Swing Compressor	x	x	x
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	x	x	x
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	x	x	x
	Hepta Sense	x	x	x
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	Stabilizer Free	Stabilizer Free	Stabilizer Free
	Filter Clean Indicator	x	x	x
Air Purification	Prefilter With Anti Bacterial Coating	x	x	x
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	x	x	x
	IDU LED Brightness Control	x	x	x
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/10	20/10	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 9.5 & φ 6.4 (3/8" &1/4")	φ 9.5 & φ 6.4 (3/8" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 229	298 x 885 x 229	298 x 800 x 229
	ODU	550 x 675 x 284	550 x 675 x 284	550 x 675 x 284

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTQ)

Model name	Indoor unit (IDU)	FTQ50XV16VCA/VCB	FTQ50XV16UCA/UCB	FTQ50XV16VDA/VDB
	Outdoor unit (ODU)	RQ50XV16VCA	RQ50XV16UCA	RQ50XV16VDA
Star Rating*		2 Star	2 Star	2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	5.05	5.05	5.05
Cooling Capacity (Min. ~ Max)	kW	x	x	x
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	1002.47	1002.47	1002.47
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	523 / 14.8	523 / 14.8
Voltage Range	V	160~264	160~264	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C	19.4°C~50°C	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	38	38	38
Operating Current (Cooling/Heating)	A	5.8	5.8	5.8
Key USPs	Patented Swing Compressor	x	x	x
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	x	x	x
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	x	x	x
	Hepta Sense	x	x	x
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	Stabilizer Free	Stabilizer Free	Stabilizer Free
	Filter Clean Indicator	x	x	x
Air Purification	Prefilter With Anti Bacterial Coating	x	x	x
	Smell Proof Operation	✓	✓	✓
	Special filter 1	PM2.5	PM2.5	PM2.5
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	x	x	x
	IDU LED Brightness Control	x	x	x
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/10	20/10	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298x 885 x229	298x885x229
	ODU	595 x845 x300	595x 845 x300	595x845x300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (FTQ)

Model name	Indoor unit (IDU)	FTQ50XV16UDA/UDB
	Outdoor unit (ODU)	RQ50XV16UDA
Star Rating*		2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓
Rated Cooling Capacity	kW	5.05
Cooling Capacity (Min. ~ Max)	kW	x
100% Cooling Capacity Temperature	°C	43°C
Rated ISEER	Wh/Wh	3.90
Rated Annual Power Consumption	kWh	1002.47
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8
Voltage Range	V	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	38
Operating Current (Cooling/Heating)	A	5.8
Key USPs	Patented Swing Compressor	x
	Patented Streamer Discharge	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x
	Smart phone app control (Wi-Fi)	x
	Voice Control (Amazon Alexa and Google Home)	x
	3D Air Flow	x
	Triple Display	x
	Power Airflow Dual Flaps	✓
	Power Chill	✓
	Econo Mode	✓
	Remote Backlit	x
	Dew Clean	x
	Hepta Sense	x
	Self Diagnosis	✓
	Stabilizer Inside	Stabilizer Free
	Filter Clean Indicator	x
Air Purification	Prefilter With Anti Bacterial Coating	x
	Smell Proof Operation	✓
	Special filter 1	PM2.5
	Special filter 2	x
Anti corrosion	Patented DNNS Coating	✓
	BTA Oil Treatment	✓
	Blue Fin Coating for ODU	✓
Safety	Multi Layer Fire Safety	✓
Controls	Display Off Function	x
	IDU LED Brightness Control	x
	Child Lock	✓
Piping length	(Max Length/Max Height) m	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229
	ODU	595x845 x300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTQ)

Model name	Indoor unit (IDU)	GTQ28XV16WBA/WBB	GTQ30XV16VBA/VBB	GTQ35XV16WBA/WBB
	Outdoor unit (ODU)	RQG28XV16WBA	RQG30XV16VBA	RQG35XV16WBA
Star Rating*		2 Star	2 Star	2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	2.8	2.93	3.35
Cooling Capacity (Min. ~ Max)	kW	x	x	x
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	555.81	582.13	664.96
Air Flow Rate (Cooling /Heating)	CFM / CMM	420 / 11.9	487 / 13.8	420 / 11.9
Voltage Range	V	160~264	160~264	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C	19.4°C~50°C	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	32	35	32
Operating Current (Cooling/Heating)	A	3.22	3.37	3.85
Key USPs	Patented Swing Compressor	x	x	x
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	x	x	x
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	x	x	x
	Hepta Sense	x	x	x
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	Stabilizer Free	Stabilizer Free	Stabilizer Free
	Filter Clean Indicator	x	x	x
Air Purification	Prefilter With Anti Bacterial Coating	x	x	x
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	x	x	x
	IDU LED Brightness Control	x	x	x
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/10	20/10	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ9.5 & φ6.4 (3/8" &1/4")	φ9.5 & φ6.4 (3/8" &1/4")	φ9.5 & φ6.4 (3/8" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 800 x 229	298 x 885 x 229	298 x 800 x 229
	ODU	550 x 675 x 284	550 x 675 x 284	550 x 675 x 284

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTQ)

Model name	Indoor unit (IDU)	GTQ50XV16VCA/VCB	GTQ50XV16UCA/UCB	GTQ50XV16VDA/VDB
	Outdoor unit (ODU)	RQG50XV16VCA	RQG50XV16UCA	RQG50XV16VDA
Star Rating*		2 Star	2 Star	2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓	✓	✓
Rated Cooling Capacity	kW	5.05	5.05	5.05
Cooling Capacity (Min. ~ Max)	kW	x	x	x
100% Cooling Capacity Temperature	°C	43°C	43°C	43°C
Rated ISEER	Wh/Wh	3.90	3.90	3.90
Rated Annual Power Consumption	kWh	1002.47	1002.47	1002.47
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8	523 / 14.8	523 / 14.8
Voltage Range	V	160~264	160~264	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C	19.4°C~50°C	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	38	38	38
Operating Current (Cooling/Heating)	A	5.8	5.8	5.8
Key USPs	Patented Swing Compressor	x	x	x
	Patented Streamer Discharge	x	x	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x	x	x
	Smart phone app control (Wi-Fi)	x	x	x
	Voice Control (Amazon Alexa and Google Home)	x	x	x
	3D Air Flow	x	x	x
	Triple Display	x	x	x
	Power Airflow Dual Flaps	✓	✓	✓
	Power Chill	✓	✓	✓
	Econo Mode	✓	✓	✓
	Remote Backlit	x	x	x
	Dew Clean	x	x	x
	Hepta Sense	x	x	x
	Self Diagnosis	✓	✓	✓
	Stabilizer Inside	Stabilizer Free	Stabilizer Free	Stabilizer Free
	Filter Clean Indicator	x	x	x
Air Purification	Prefilter With Anti Bacterial Coating	x	x	x
	Smell Proof Operation	✓	✓	✓
	Special filter 1	x	x	x
	Special filter 2	x	x	x
Anti corrosion	Patented DNNS Coating	✓	✓	✓
	BTA Oil Treatment	✓	✓	✓
	Blue Fin Coating for ODU	✓	✓	✓
Safety	Multi Layer Fire Safety	✓	✓	✓
Controls	Display Off Function	x	x	x
	IDU LED Brightness Control	x	x	x
	Child Lock	✓	✓	✓
Piping length	(Max Length/Max Height) m	20/10	20/10	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")	φ12.7 & φ6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229	298x 885 x229	298x885x229
	ODU	595 x845 x300	595x 845 x300	595x845x300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

TECHNICAL SPECIFICATION (GTQ)

Model name	Indoor unit (IDU)	GTQ50XV16UDA/UDB
	Outdoor unit (ODU)	RQG50XV16UDA
Star Rating*		2 Star
Rated Power supply (Phase/Frequency/Voltage)	(220-240V)1 φ 50Hz 230V	✓
Rated Cooling Capacity	kW	5.05
Cooling Capacity (Min. ~ Max)	kW	x
100% Cooling Capacity Temperature	°C	43°C
Rated ISEER	Wh/Wh	3.90
Rated Annual Power Consumption	kWh	1002.47
Air Flow Rate (Cooling /Heating)	CFM / CMM	523 / 14.8
Voltage Range	V	160~264
Ambient Temperature Range	Cooling(Min~Max)	19.4°C~50°C
Minimum IDU Sound Level	(dBA)	38
Operating Current (Cooling/Heating)	A	5.8
Key USPs	Patented Swing Compressor	x
	Patented Streamer Discharge	x
	Intelligent Eye (Energy Saver and Auto ON/OFF)	x
	Smart phone app control (Wi-Fi)	x
	Voice Control (Amazon Alexa and Google Home	x
	3D Air Flow	x
	Triple Display	x
	Power Airflow Dual Flaps	✓
	Power Chill	✓
	Econo Mode	✓
	Remote Backlit	x
	Dew Clean	x
	Hepta Sense	x
	Self Diagnosis	✓
	Stabilizer Inside	Stabilizer Free
	Filter Clean Indicator	x
Air Purification	Prefilter With Anti Bacterial Coating	x
	Smell Proof Operation	✓
	Special filter 1	x
	Special filter 2	x
Anti corrosion	Patented DNNS Coating	✓
	BTA Oil Treatment	✓
	Blue Fin Coating for ODU	✓
Safety	Multi Layer Fire Safety	✓
Controls	Display Off Function	x
	IDU LED Brightness Control	x
	Child Lock	✓
Piping length	(Max Length/Max Height) m	20/10
Piping Connection	Gas/Liquid mm(Inch)	φ 12.7 & φ 6.4 (1/2" &1/4")
Dimensions (HxWxD) mm	IDU	298 x 885 x 229
	ODU	595x845 x300

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

ALL REASONS TO BRING DAIKIN HOME

From innovations that set us apart to the inventions that change the lives of people, every Daikin product goes through rigorous testing to get our seal of approval. Every journey of a product from the assembly lines to the homes of people is a result of years of labour with an unwavering aim to improve the quality of life and make the planet better.

10 years warranty* on Compressor

Long term assurance

Provides tension-free comfort for a decade.

*Applicable for inverter models only.

5 years warranty* on PCB (Printed Circuit Board)

Long term assurance

Gives extra assurance on the maintenance cost.

*Applicable for inverter models only.

Dew Clean*# Technology

Cleans the indoor heat exchanger automatically

Ensures hygiene & maintains clog-free heat exchanger for a better airflow.

*Applicable models: All inverter series.
#This feature will not work in heating function.

Triple Display* (on Indoor unit)

Power consumption, set/room temperature & auto error code

Complete control and monitoring in the hands of consumer.

*Applicable models: All inverter series.

Hepta Sense*

Automated operations

The 7 Sensors on the IDU & ODU improve overall performance, provide convenience & increases the durability of the AC.

*Applicable for inverter models only.

Patented DNNS Coating*

Enhanced durability

The DNNS coating forms a protective layer on the copper coils and offers exceptional defence against corrosion.

*Available in all Split ACs series.

Multi-Layer Fire Safety

Safety-Focused and Worry-Free Operations

Take Care of your world with Daikin – The Air Specialist

C Comfort — For your diverse air conditioning needs, we provide a wide range of ACs in various capacities.

A Air Quality — From Patented Streamer Technology to 3 stage filtration, Daikin ACs provides quality air for your health & comfort.

R Reliability — Japanese technology meets Indian manufacturing for a reliable range of products to choose from.

E Energy Efficiency — Opt for energy-efficient products for a greener and cooler tomorrow.

Dry Function*



Automatic dehumidification

Enhanced comfort by reducing excessive humidity.

*Applicable models: All series except FTHT and FTXF.

Patented Streamer* Discharge Technology

Plasma discharge decomposes viruses1, bacteria1 and harmful gases1

Clean and healthy airflow.

1 – For details, visit: www.daikinindia.com/patented-streamer-discharge-technology
*Applicable models: JTKJ series.

High Ambient* Operation

55°C

Operation at high ambient temperatures up to 55°C#

Comfortable cooling even at extreme conditions.

#Applicable in 5 star series.

Mobile App* Control

Control from any corner of the world

Easy accessibility through mobile app.

*Applicable models: JTKJ/FTKR/FTKN series.

Voice Controlled* Air-conditioning

An AC that listens to your command

Voice controlled via Amazon Alexa/Google Home.

*Applicable models: JTKJ/FTKR/FTKN series.

3 Stage* Air Filtration

Germ free air

Captures micro dust particles and airborne pathogens to provide clean, safe and fresh air.

*Applicable for Inverter series only.

Good Sleep* Off Timer



Assured comfortable sleep

Set temperature increases by 0.5 C in 30 minutes interval.

*Applicable models: All series.

3D Airflow*

Uniform cooling at every corner

It ensures steady air circulation to deliver even cooling and unmatched comfort.

*Applicable models: All inverter series except G Series, FTKC and FKTU.

Intelligent Eye*

Adjusted cooling according to human presence

Saves energy when room is empty and auto on off the AC.

*Applicable models: JTKJ series.

Power Chill Operation*



Faster cooling than normal mode

Immediate relief from hot temperatures.

*Applicable models: All series except FTHT & FTXF series.

Auto Error Code* Display



Auto error detection in indoor unit display

AC issues identification that no longer requires technician expertise.

#E1: Visuals used are for representation purpose only.
*Applicable models: Inverter series.

Patented Swing* Inverter Compressor

Energy & money savings

Faster cooling with low operating sound.

*Available in selected models.

Tru Inverter*

Maximum user comfort

Constantly adjusts the compressor's speed for optimum cooling and assures energy savings.

Applicable in Inverter Series only.

ISEER 6.6* RATING Highest ISEER

Higher efficiency

18% more energy efficiency as compared to 5 Star AC with ISEER 5.6.

Applicable for FTKF35XV16MAA model.

Stablizer Inside* Operation

No worry on voltage fluctuation

Regulates voltage across a wide range of fluctuation (130V~285V). Smooth operations during voltage fluctuations.

*Applicable for inverter models only.

Coanda Airflow*

Even airflow distribution to every corner of the room

Optimises flap position of the indoor unit for radiant cooling.

*Applicable models: All series.

Anti-Corrosion Treatment*

Ensuring long life

With a special coating, it prevents the rusting of the copper coil.

*Applicable in selected models.

R-32 Green* Refrigerant

Zero ozone depletion

Better cooling in high ambient temperatures.

*Applicable for all series .

ECONO Econo Mode*

Reduces energy consumption

Optimises cooling capacity.

*Applicable models: All series.

Inner Grooved Pipe*



Oscillatory refrigerant motion

Better heat dissipation, strengthening AC's cooling performance.

*Applicable models: Selected series.

Stabilizer Free* Operation

Low cost maintenance

Wide operation range. (160V~264V)

*Applicable for non-inverter models only.

Outdoor Power Supply



Protection against fire accidents

To ensure safety.

*Applicable models: All series.

Filter Clean Indicator

Uninterrupted comfort

Ensures timely filter upkeep

*Applicable models: All inverter series.

DAIKIN AIRCONDITIONING INDIA PVT. LTD.
12th Floor, Building No. 9, Tower A, DLF Cyber City
DLF Phase III, Gurgaon 122002, Haryana, India
Tel: 0124-4555444, Fax: 0124-4555333

Sales & Service Offices:

Ahmedabad
Tel: 079-40013100

Bengaluru
Tel: 080-25722336/25722337

Bhubaneswar
Tel: 0674-2554677/76

Chandigarh
Tel: 0172-4947200/30

Chennai
Tel: 044-40807676

Cochin
Tel: 0484-2331615

Coimbatore
Tel: 7540093364

Delhi
Tel: 011-43834400/5500

Ghaziabad
Tel: 0120-4205851

Guwahati
Tel: 9147165421

Hyderabad
Tel: 040-49134283

Indore
Tel: 0731-4005864

Jaipur
Tel: 0141-2218905/906

Jammu
Tel: 8194990333

Karnal
Tel: 01844006855

Kolkata
Tel: 033-40608019/40659544

Lucknow
Tel: 0522-4309858/59/60

Ludhiana
Tel: 0161-5011122

Mumbai
Tel: 022-62321666

Patna
Tel: 8083222131/9147310520

Pune
Tel: 020-47248158

Raipur
Tel: 0771-4911225

Ranchi
Tel: 7008704566

Rajkot
Tel: 0281-2995059

Surat
Tel: 0261-4404365

Vijayawada
Tel: 0866-295222624

Visakhapatnam
Tel: 8008304466

Customer Contact Centre:

Say "Hi" at 987 140 9300
Customer Support no.: 1860 180 3900/011-40319300
Email: customerservice@daikinindia.com
Visit us at: www.daikinindia.com

Follow us on:
www.facebook.com/daikinindia
www.twitter.com/daikinindia
www.instagram.com/daikinindia
in.linkedin.com/company/daikin-airconditioning-india-pvt.-ltd.
www.youtube.com/user/DaikinACIndia

Disclaimer

As a continuing policy of product innovation at Daikin, the design and specifications are subject to change without prior notice. The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.

'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life.' For more details kindly visit our website www.daikinindia.com or contact our customer care centre at 011-40319300/1860 180 3900.

Know more about The Air Specialist

Scan to see Daikin AC Features

DAIPL-2026/26-1/RAMain-1A