



ADVANTAGE

X' TENSIVE
RANGE

X' TRA
POWER SAVINGS

X' CELLENT
TECHNOLOGY

X' TENDED
RELIABILITY

PRESENTING THE NEW
Heat Pump | Cooling Only



INDEX

SALIENT FEATURES	6
OUTDOOR UNIT LINE-UP	19
INDOOR UNIT LINE-UP	20
SPECIFICATIONS	46
OUTDOOR UNIT COMBINATIONS	66
OPTION LIST	68
CONTROL SYSTEMS	72
AIR TREATMENT EQUIPMENT LINE-UP	96



Equipped with Advanced Technology, that results in high energy efficiency. This technological innovation gives end user the advantage of better comfort and works further towards creating a sustainable environment.



DAIKIN

The world leader in air conditioning

At Daikin, we are a leading innovator and provider of advanced, high-quality air conditioning solutions for residential, commercial and industrial applications.

As world's leading air conditioning company, we are committed to deliver air conditioning solutions that enhance the quality of life all around the world.

Established in 1924, Daikin Industries Ltd., is a diverse multinational company, active in air conditioning, chemicals and oil hydraulics. With headquarters at Osaka, Japan, our Daikin family has more than 67,000 members, working across 80 production base and 208 consolidated subsidiaries worldwide.

As the world's sole manufacturer that develops a long line of products from refrigerants to air conditioners, we advocate comfortable living on the strength of advanced technologies.

We are present in USA, Europe and Russia, The Middle East, Africa, Asia, Oceania and Middle-South America. We aim to serve our customers in each of these markets by providing optimal air conditioning solutions.



EUROPE / MIDDLE EAST / AFRICA




CHINA



ASIA / OCEANIA



NORTH AMERICA / CENTRAL & SOUTH AMERICA

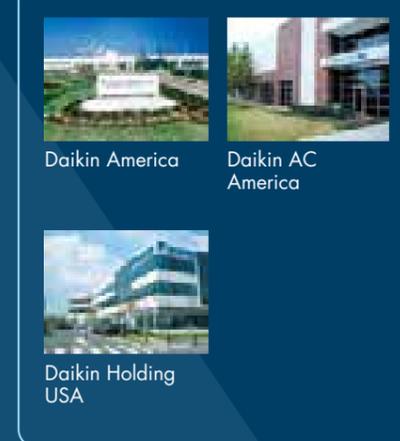

Exploring new R&D frontiers

At Daikin, we are creating value through innovative technologies. As a global industry front-runner, we are carrying out research and development on the world's most advanced air conditioning technology.

Our strong R&D edge has helped us create futuristic products that enrich people's lives. As symbolised by the VRV, Daikin has put forth a multitude of products and varied technology that have always been and continue to be, at the forefront of innovation.

To be able to offer such products and services that delight and astound our customers, we have constructed an advanced R&D architecture.



Environmental Technology Research Laboratory: Intensive Research on Environmentally Conscious, Energy Saving Air Conditioning Technology


Accelerating globalisation of our air conditioning business and varied needs of customers across geographies are increasing our research challenges. We have established a research laboratory devoted to the two fields of 'air conditioning' and 'the environment'. With our mission to promote energy savings in air conditioners, we are engaged in R&D on cutting-edge technologies. Our aim is to create futuristic products from fundamental research on motor inverters and other areas to support individual product development.

Going forward, we will elevate our technology edge to achieve further business expansion globally.




Formation of a three-division system of research, IT and development to support our superior products.

To create more advanced functions and new value, we have instituted specialised R&D divisions: the 'Environmental Technology Research Laboratory' and the 'Solution Product Development Centre'. In combination with the Product Development Group, each of the three divisions work in close co-operation to precisely ascertain the customers' needs and to enable commercialisation of products, incorporating advanced technology that take the lead over our competitors.

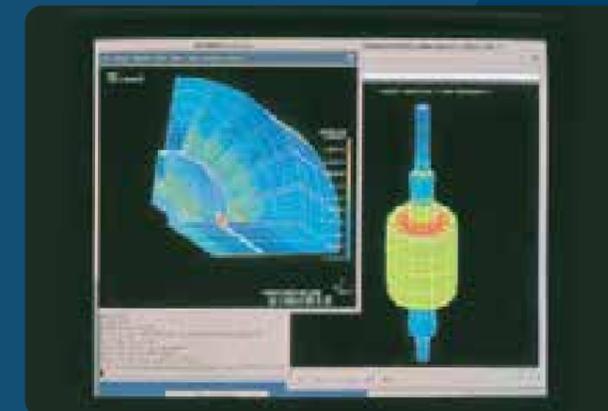

The Solutions Product Development Centre: Integrating Air Conditioners with IT

Keeping in mind the changes in business brought in by the computerisation and networking of society, we have integrated IT into our airconditioners, including communication technology, software technology and digital control. We are initiating R&D that will offer new system services - a comfortable environment with superior energy savings by networking air conditioners. Such a scenario will enable them to exchange information with service centres.

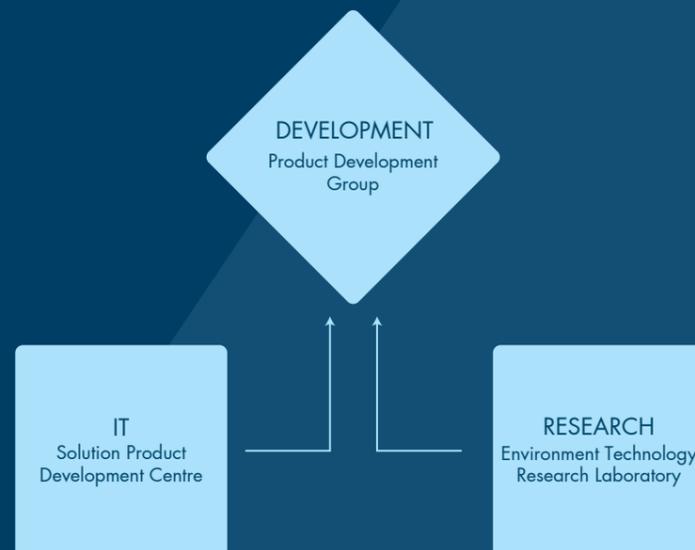

Technology & Innovation Centre, Japan:

Aiming for new value creation as a core base for technology development.



Research & Development Centre, India:

Reiterating to its commitment to Indian market, Daikin India R&D is dedicated to provide customised solutions to its customers.



World's most advanced **VRV X** air conditioning system with Innovative VRT technology.

First launched in Japan in 1982, the Daikin VRV system has been embraced by the world markets for over three decades. Now, we at Daikin introduce the next generation VRV X system to reinforce our industry leadership. The system offers an enhanced line-up to meet an ever widening variety of needs, while improving energy savings, comfort and ease of installation.

The VRV X is the most advanced air conditioning system in the world and is ideal for small and large spaces.

Energy saving technology for VRV X System

<p>X' TRA POWER SAVINGS</p> <p>Next Generation Compressor & VRT Smart Control</p>	<p>VRT-Variable Refrigerant Temperature in Indoor Unit (IDU) and Outdoor Unit (ODU)</p> <p>The new VRV X system now features VRT technology in IDU & ODU. VRT automatically adjusts refrigerant temperature to individual building load and climate requirement, thus further improving annual energy efficiency and maintaining comfort. With this technology, running costs are reduced.</p>
--	---

X' TENSIVE RANGE
Up to 60 HP

X' CELLENT TECHNOLOGY
4D Inverter System

X' TENDED RELIABILITY
Auto-Optimisation Refrigerant Charging

Standard Type

New series with compact and light weight design
6 HP-60 HP with 56 models line-up (For Heat Pump & Cooling Only)



VRV X	
Installation Space	0.95 m ²
Product Weight*	285 kg

*For cooling only model



Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	
Cooling Only/Heat Pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

New heights in energy efficiency during actual operation


The key to innovative energy savings is to increase efficiency during low-load operation.

Using data gathered from actual operation, Daikin discovered that air conditioning systems operate at a load factor of 50% or less for 70% of their annual operation period.

This inspired us to develop new technologies to enhance energy efficiency during low loads.

Utilising these technologies, Daikin's new VRV X series raise the standard for energy efficiency.

•Correlation between the load factor for the rated capacity and operation time
*According to a survey by Daikin (based on Air Conditioning Network Service System data)

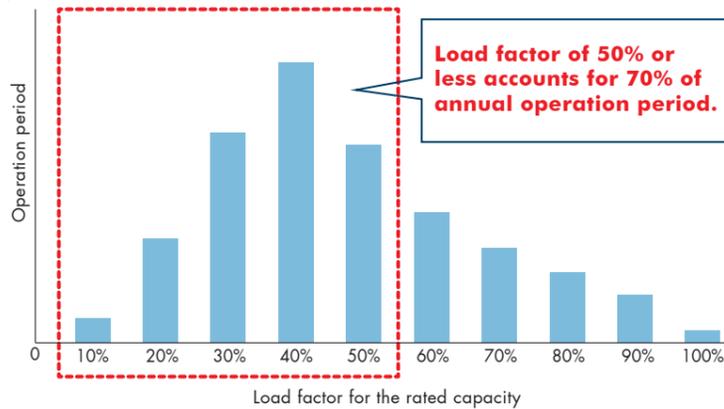


New Scroll Compressor*

Refrigerant leakage is minimised during low-load operation.

Operation loss due to refrigerant leakage is reduced by the proprietary back pressure control mechanism to ensure stable low-load operation.

Hardware technology


For More information 'Scan Me'

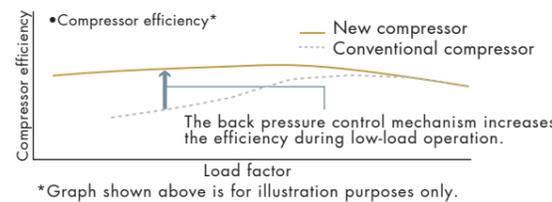

Back pressure control mechanism

Conventional mechanism


The movable scroll is pressed by the pressure difference between high and low pressures. The force pressing the movable scroll decreases during low-load operation, results in compression leakage from movable parts.

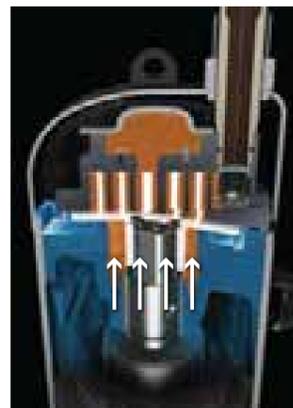


The force pressing the movable scroll decreases during low-load operation.

New intermediate pressure mechanism

The force pressing the movable scroll is optimised according to operating conditions. The behaviour of the movable scroll has been stabilised to increase efficiency during low-load operation.

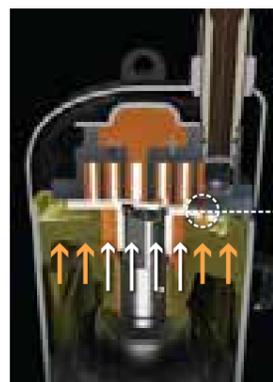

The intermediate pressure keeps pressing the movable scroll during low-load operation.

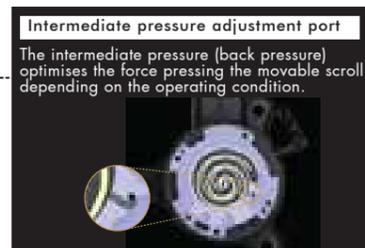

For More information 'Scan Me'

Energy saving

VRV+VRT+VAV

Uniting advanced software and hardware technologies for greater energy savings during actual operation.

VRT Smart Control (Fully Automatic Energy-saving Refrigerant Control)


Software technology

Optimally supply only for the needed capacity of indoor units


Daikin developed VRT smart control by combining air volume control (VAV: Variable Air Volume) for indoor units with conventional VRT control, which optimises compressor speed by calculating the required load for the entire system and optimal target refrigerant temperature based on data sent from each indoor unit. Coordination with the air volume control reduces compressor load and minimises operation loss based on detailed control. VRT smart control ensures energy savings and comfortable air conditioning to meet actual operating conditions.

- Overview of the control (system control flow)

Different automatic energy-saving refrigerant control applies depending on the indoor units connected.

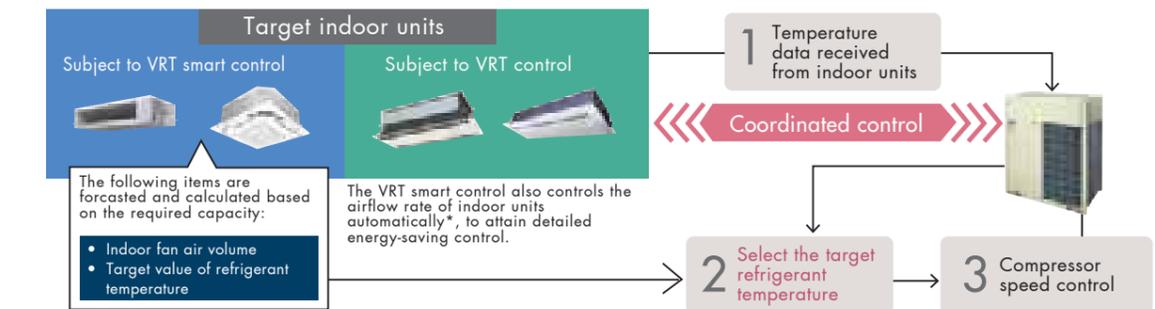

The smooth control (which keeps the compressor running) saves energy and ensures comfort during low-load operation.

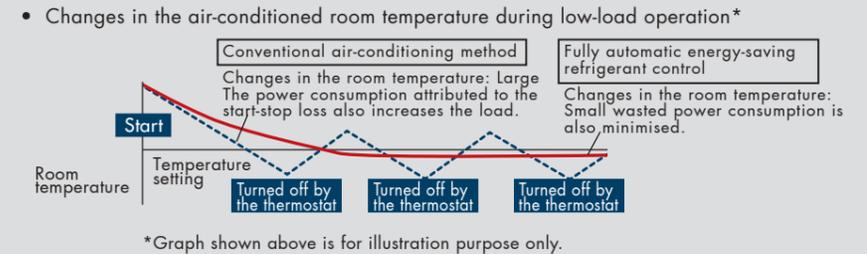


Note:

- For the classification of indoor units (VRT smart control and VRT control), refer to page 20.
- In case system is having both VRT Control and VRT Smart Control types of Indoor units, system will operate under VRT Control.
- If a system has air handling unit or outdoor-air processing type indoor units, VRT smart control and VRT control are disabled.

Higher efficiency is provided during rated operation.

COP at 100% operation load

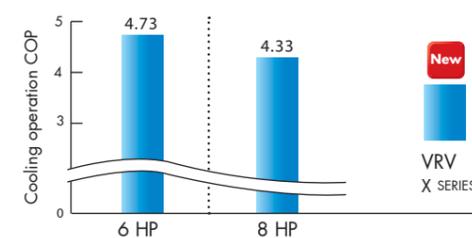

Cooling operation conditions: Indoor temp, of 27°CDB, 19°CWB and outdoor temp, of 35°CDB.

Advanced oil temperature control

Standby power consumption is reduced

The advanced oil temperature control reduces standby power consumption compared to conventional models. Standby power is needed for preheating refrigerator oil, which consumes substantial standby power and is reduced to save energy when the air conditioner is stopped.

State-of-the-art energy saving technology for VRV system


Customise your VRV system for optimal annual efficiency

The new VRV X system features VRT technology. VRT automatically adjusts refrigerant temperature to individual building and climate requirement, thus further improving annual energy efficiency and maintaining comfort.


With this excellent technology, running costs are reduced.

How is energy reduced?

During cooling, the refrigerant evaporating temperature (T_e) is raised to minimise the difference with the condensing temperature. During heating, the condensing temperature (T_c) is lowered to minimise the difference to the evaporating temperature. Compressors work less and this reduces power consumption.

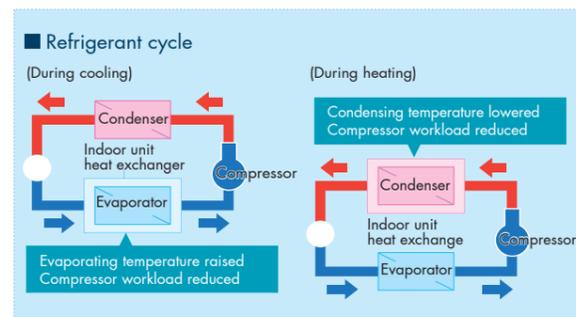


Typical changes in evaporating temperature and COP depending on changing indoor load

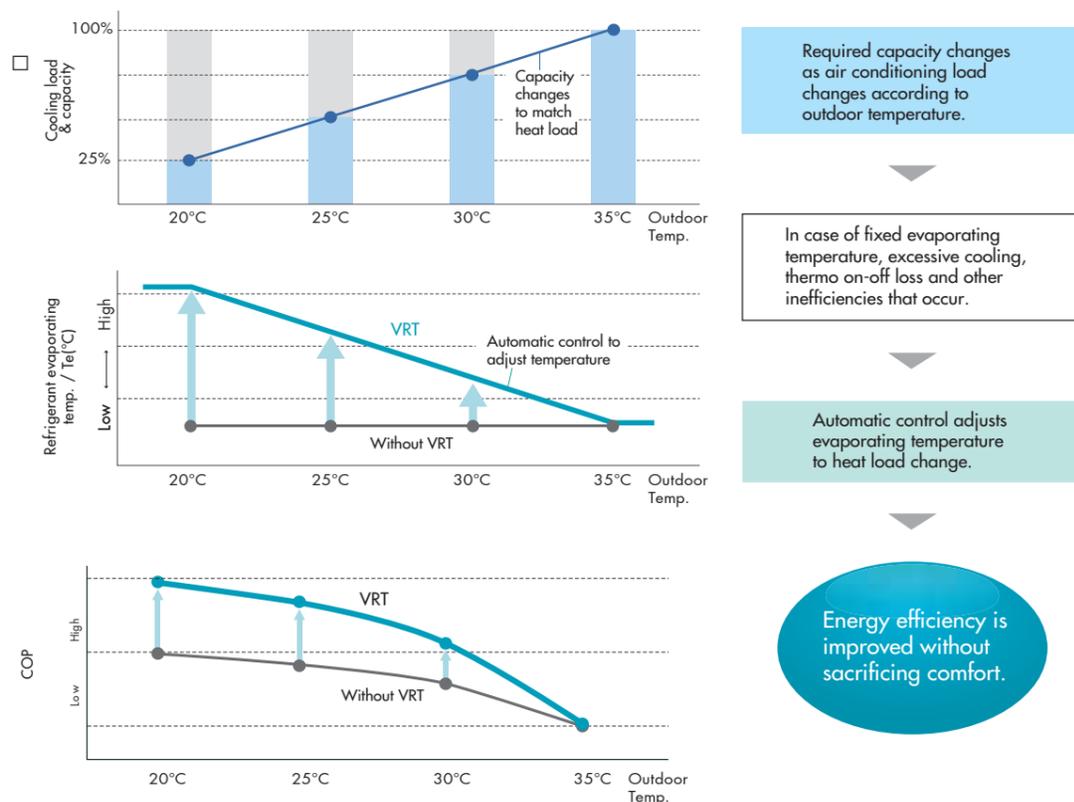

Fine control to match user preference available through mode selection


Basic mode is selected to maintain optimal comfort.

VRT is selected to save energy and prevent excessive cooling or heating.

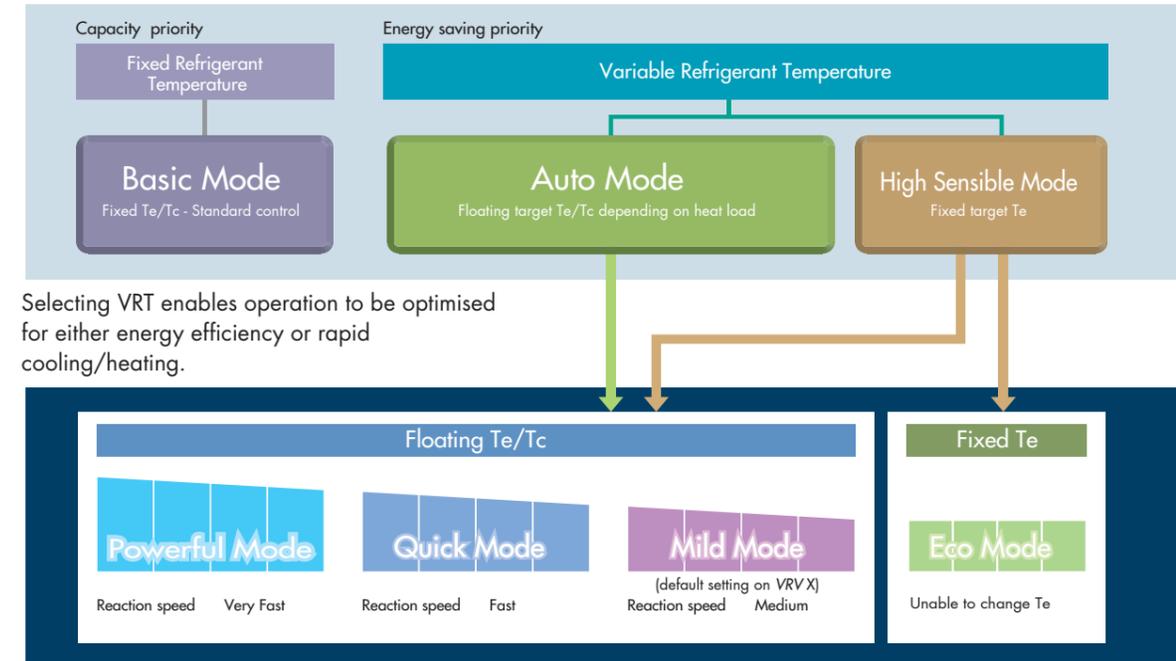

Selecting VRT enables operation to be optimised for either energy efficiency or rapid cooling/heating.


VRT offers quicker cool down to shorten uncomfortable pull down time.

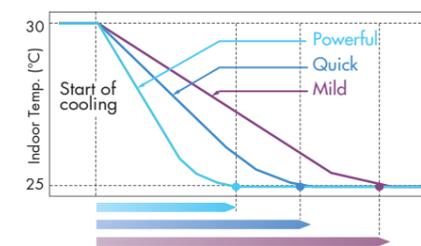

Powerful mode	The refrigerant temperature can go low in cooling (high in heating) than the set minimum (maximum in heating). Gives priority to very fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
Quick mode	Gives priority to fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
Mild mode	Gives priority to efficiency. The refrigerant temperature goes down (or up in heating) gradually, giving priority to the efficiency of the system instead of the reaction speed.


Recommended for use in these situations

Cooling only regions having differences in daily temperature.

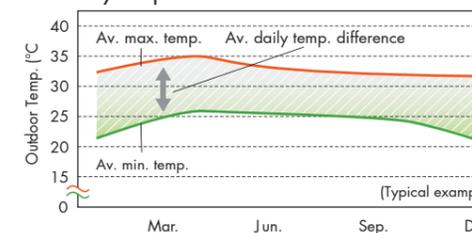

VRT is particularly effective at night when temperatures are low.

Cooling/heating regions having periods of mild outdoor temperatures.

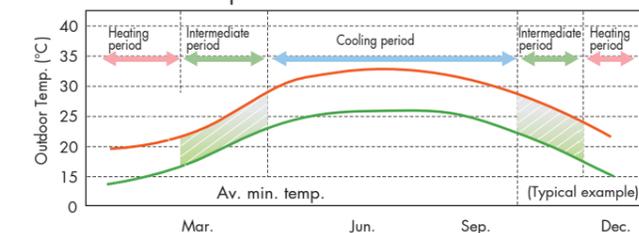


VRT is particularly effective during the intermediate periods.

● **Large capacity all DC inverter compressor in compact casing** ●


Large capacity inverter compressor using high tensile strength material, realise 12 HP compressor using 8 HP casing.

Compact & high efficiency concentrated winding motor

Distributed winding motor
(Current 8 HP compressor)

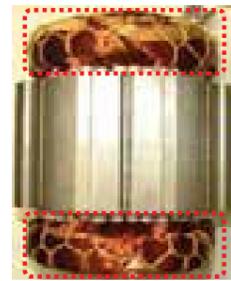

Concentrated winding motor
(New 12 HP compressor)

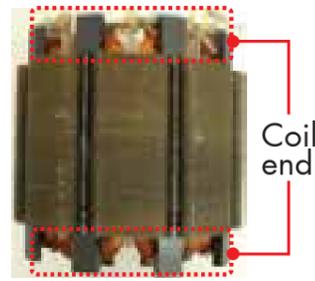


Coil end

Small size coil end using concentrated winding, reduces copper loss(winding resistance). Improves motor efficiency in low rpm range (improves intermediate efficiency).

● **Highly integrated heat exchanger** ●

Improves performance by increasing heat exchanger area while maintaining the same installation space.

Conventional



Fine Louvre Fin



Waffle Fin

Realises highly integrated heat exchanger performance by employing 3 rows and reduced fin pitch coil as well as reduction in airflow resistance by adopting small pipe size design.



20 HP

3 rows with small pipe design, increase heat transfer efficiency




● **4D Inverter Technology** ●

Improved reliability by introducing Daikin 3-phase capacitor-less 4D Inverter technology

4Ds mean...

- Direct Inverter
- Dynamic
- Drive
- High Energy Density

- Direct conversion circuit which eliminates the electrolytic capacitor and minimise the reactor size
- Dynamic waveform control that suppresses the resonance phenomenon generated by miniaturizing parts
- Drive technology
- High Density integration of parts on small printed circuit board

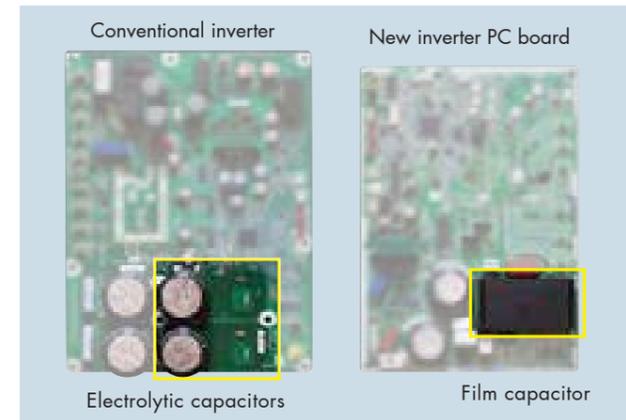

New Inverter PC Board

The control functions of inverter technology have been integrated on printed circuit boards. As well as improving reliability, this has reduced the number of parts and enabled downsizing.

- New waveform control improves tolerance of variations in power supply voltage. Even if the power supply has irregularities, rises in current are suppressed and operation continues.
- Durability of the inverter printed circuit board improved by changing the electrolytic capacitors for the compressor to film capacitors.


● **Excellent Performance** ●

Various advanced control main PC board

SMT* packaging technology

SMT packing technology adopted by the whole computer control panel improve the anti-clutter performance.

Protects your computer board from adverse effect of sandy and humid weather.

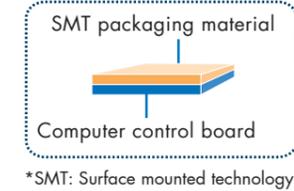


*SMT: Surface mounted technology



Improved inner design to increase smooth airflow

Downsizes electric component, relocates to dead space of bell mouth side to decrease airflow resistance.

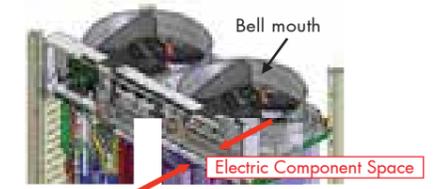

Excellent Performance



Refrigerant cooling technology, ensures stability of PCB temperature
Improves reliability at high ambient temperature

It is possible to cool the inverter power module stability even at high ambient temperature. This helps to keep air conditioning capacity and also ensures efficient and reliable operation.

Comfort

Lower operation sound

Improves heat exchanger efficiency, helps to reduce operation sound.

Large airflow, high static pressure and quiet technology.


Without increasing operation sound, advanced analytic technologies are utilised to optimise fan design, increase airflow rate and external static pressure.

	6 HP	8 HP	10 HP	12 HP
VRV X	56	56	57	59

Sound level(dB(A))


Quiet night-time operation function

Outdoor PCB automatically memorises the time when the peak outdoor temperature appears. It enables quiet operation mode after 8 h*1 and returns to normal mode after it keeps this on for 9 h*2.

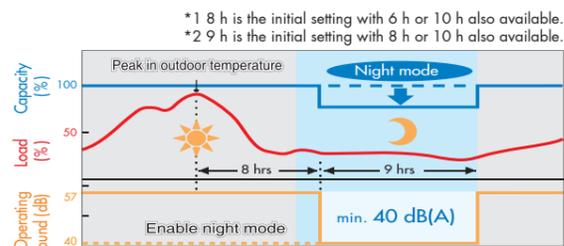


Notes:

- This function is available in field setting.
- The operating sound in quiet operation mode is the actual value measured by Daikin.
- The relationship of outdoor temperature (load) and time shown above is just an example.
- For 10 HP ODU.

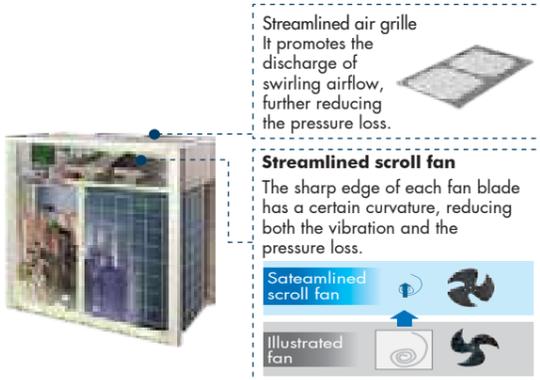

Ease of Maintenance

VRV X series provides a maintenance feature* which allows the shut down of indoor unit without shutting down the whole VRV system. This feature comes in handy during maintenance period as the remaining indoor units continue to operate.

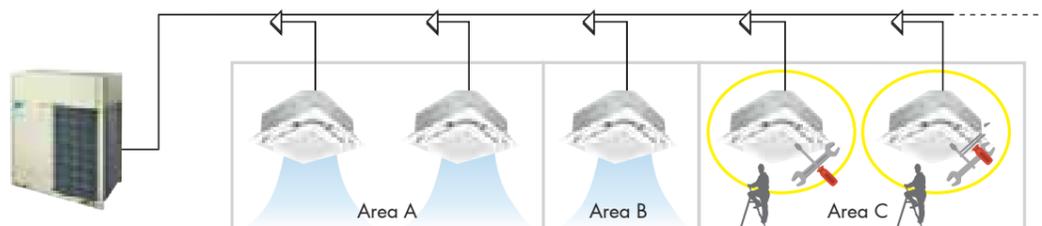

* Field setting is required.
 This feature does not apply to residential indoor unit connection.
 For more information, please contact Daikin sales office.




Automatic Refrigerant Charge Function

Contribute to optimised operation efficiency, higher quality and easier installation

Optimised operation efficiency

The automatic refrigerant charge function automatically determines the optimal amount of refrigerant to be charged.

This function prevents a capacity shortage or energy loss due to excessive or insufficient refrigerant.

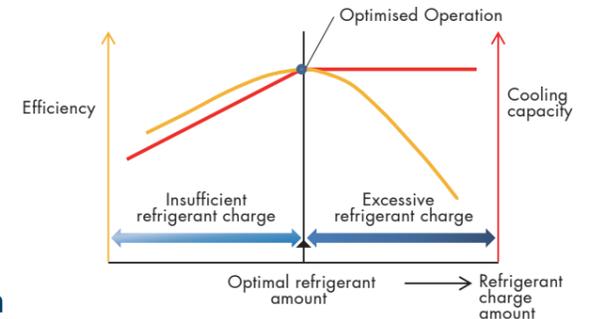

Higher quality and easier installation

The automatic refrigerant charge function automates the charging of the proper refrigerant amount and the closing of shut-off valves with just one press of the switch after pre-charging. Simplified installation eliminates excessive and insufficient refrigerant charge amounts due to calculation mistakes and this has led to higher installation quality.

Conventional

- 1 Calculate necessary refrigerant amount from design drawing
- 2 Recalculate refrigerant amount from final installation drawing
- 3 Charge refrigerant
- 4 Regularly check refrigerant weight on weighing scale
- 5 Complete by manually closing valves when proper weight is reached



1 Calculation of necessary refrigerant amount from design drawing

2 Pre-charge of refrigerant*

3 Start of automatic refrigerant charge operation

Automatic completion with optimal refrigerant amount

Monitoring refrigerant charging is not required

No recalculation of charge amounts due to minor design changes at site

*Pre-charge amount changes according to conditions, and there are cases when pre-charging is unnecessary.

Multiple Advanced Features Ensuring More Accurate Test Operation And Stable System

Efficient automatic test operation

Automatically checks the wirings between outdoor units and indoor units to confirm whether there is a defective wiring.

Confirms and corrects the actual piping length.

Automatically checks whether the stop valve in each outdoor unit is in normal status to ensure the smooth operation of air conditioning system.

Automatic check




Free Phase Technology

Phase reversal occurs in areas where power supply is frequent. At the time of power recovery, phase reversal may take place due to AC source and device may stop for PCB protection. By employing Free Phase technology, continued operation is achieved.

Simplified commissioning and after-sales service


Function of information display by luminous digital tube

VRV X system utilises the 7-segment luminous digital tubes to display system operation information, enabling the operational state to be visually displayed whilst facilitating simplified commissioning and after-sales service.

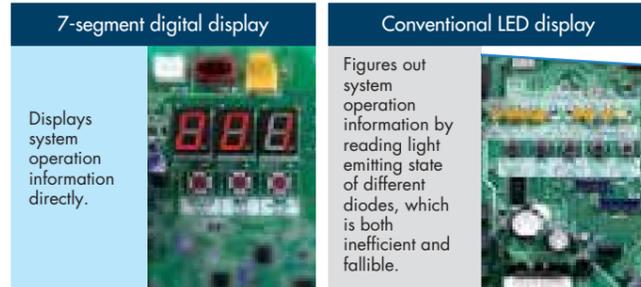

VRV configurator


- The VRV configurator is an advanced solution that allows for easy system configuration and commissioning.
- Less time is required on the roof configuring the outdoor unit.
- Multiple system at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts.
- Initial setting on the outdoor unit can be easily retrieved.

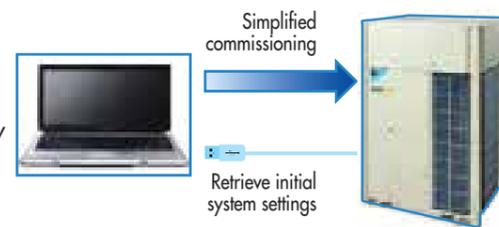

Outdoor unit sequencing technology

Automatic sequencing operation

During start-up, the Daikin VRV X unit sequencing operation will be automatically enabled to ensure balanced operation of each outdoor unit to improve longevity of equipment and stable operation.

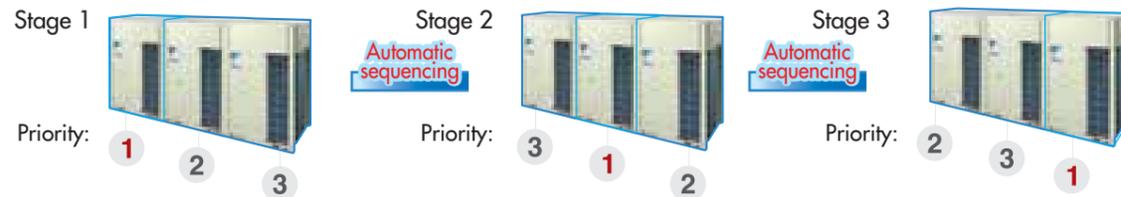


Double back-up operation functions responding resiliently to various unexpected situations

Double back-up operation functions

Daikin VRV X system boasts double back-up operation functions, which can secure the use of air conditioners in this area to the greatest extent by emergently enabling double back-up operation functions even if failure occurs in a set of air conditioning equipment. In the event of a failure, emergency operation can be enabled conveniently to allow the remaining system to operate in a limited fashion.

Compressor back-up Operation Function

If malfunction occurs in a compressor...
Emergency operation can be easily set and enabled by the outdoor unit (for a single outdoor unit system RXQ16-20ARY6 : for Cooling only model RXYQ14-20ARY6: for Heat Pump model).

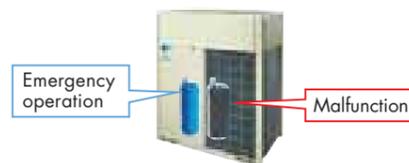

Unit back-up operation function


If malfunction occurs in an outdoor unit, emergency operation can be conveniently set and enabled by the remote controller for indoor unit (for systems composed of two or more outdoor units).



More options for installation location

Long piping length

The long piping length provides more design flexibility, which can match even large-sized buildings.

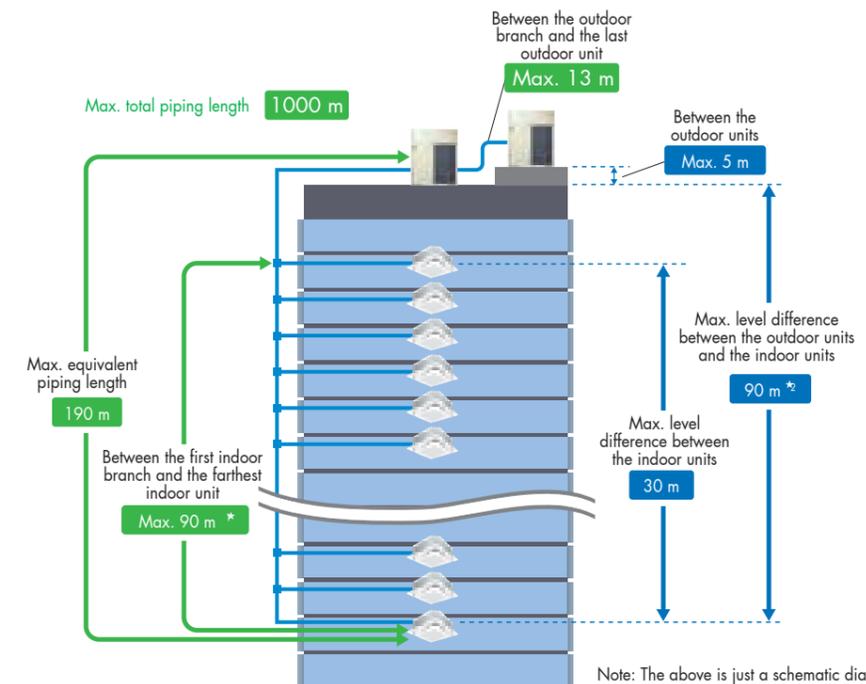

Note: The above is just a schematic diagram.

	Actual piping length (Equivalent)	165 m (190 m)
Maximum allowable piping length	Total piping length	1000 m
	Between the first indoor branch and the farthest indoor unit	90 m*1
	Between the outdoor branch and the last outdoor unit (Equivalent)	10 m (13 m)
Maximum allowable level difference	Between the outdoor units (Multiple use)	5 m
	Between the indoor units	30 m
	Between the outdoor units and the indoor units	90m*2

1. No special requirements up to 40 m. The maximum actual piping length can be 90 m, depending on conditions. Various conditions and requirements have to be met to allow utilisation of 90 m piping length.
2. When level differences are 50 m or more, the diameter of the main liquid piping size must be increased. If the outdoor unit is above the indoor unit, a dedicated setting on the outdoor unit is required.

Connection ratio

Connection capacity at maximum is 200%.

Connection ratio 50%–200%

$$\text{Connection ratio} = \frac{\text{Total capacity index of the indoor units}}{\text{Capacity index of the outdoor units}}$$

Conditions of VRV indoor unit connection capacity

Applicable VRV indoor units	FXDQ,	FXMQ-PB,	FXAQ, models	Other VRV indoor unit models*1
Single outdoor units	200%			200%
Double outdoor units				160%
Triple outdoor units				130%

*1 For the FXFQ25 and FXVQ models, maximum connection ratio is 130% for the entire range of outdoor units.
Note: If the operational capacity of indoor units is more than 130%, low airflow operation is enforced in all the indoor units.
*Refer to page 65 for outdoor unit combination details.



High external static pressure

VRV X outdoor unit has achieved high external static pressure up to 78.4 Pa, ensuring the efficient heat dissipation and stable operation of equipment in either hierarchical or intensive arrangement.

78.4 Pa

- More options in the opening/angle of louvre
- Outstanding heat dissipation effect in both hierarchical and intensive arrangement



Outdoor Units

The outdoor unit capacity is up to 60 HP in increment of 2 HP.

- VRV X outdoor unit offers a higher capacity of up to 60 HP, responding to the needs of large-sized buildings.
- The single outdoor unit has only 2 different shapes and dimensions, not only simplifying the design process, but also bringing the system flexibility to a new level.
- With the outdoor unit capacity increased in increment of 2 HP, customers' needs can be precisely met.

Standard Type

Single Outdoor Units

6, 8, 10, 12 HP



RX(Y)Q6ARY6
RX(Y)Q8ARY6
RX(Y)Q10ARY6
RX(Y)Q12ARY6

14, 16 HP



RX(Y)Q14ARY6
RX(Y)Q16ARY6

18, 20 HP



RX(Y)Q18ARY6
RX(Y)Q20ARY6

Double Outdoor Units

22, 24 HP



RX(Y)Q22ARY6
RX(Y)Q24ARY6

26, 28, 30 HP



RX(Y)Q26ARY6
RX(Y)Q28ARY6
RX(Y)Q30ARY6

Double Outdoor Units

32, 34, 36, 38, 40 HP



RX(Y)Q32ARY6
RX(Y)Q34ARY6
RX(Y)Q36ARY6
RX(Y)Q38ARY6
RX(Y)Q40ARY6

Triple Outdoor Units

42, 44, 46, 48, 50, 52 HP



RX(Y)Q42ARY6
RX(Y)Q44ARY6
RX(Y)Q46ARY6
RX(Y)Q48ARY6
RX(Y)Q50ARY6
RX(Y)Q52ARY6

54, 56, 58, 60 HP



RX(Y)Q54ARY6
RX(Y)Q56ARY6
RX(Y)Q58ARY6
RX(Y)Q60ARY6

Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Cooling Only/ Heat Pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Enhanced Range Of Choices

A variety of VRV indoor units is enabled in one system, opening the door to stylish and quiet indoor units.

VRV Indoor Units

16 types 77 models

Type	Model Name	Capacity Range Capacity Index	0.8 HP 20	1 HP 25	1.25 HP 31.25	1.6 HP 40	2 HP 50	2.5 HP 62.5	3 HP 71	3.2 HP 80	4 HP 100	5 HP 125	6 HP 140	7 HP 170	8 HP 200	10 HP 250	16 HP 400	20 HP 500	
Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)	New FXFSQ-ARV16 VRT Smart Control		●	●	●	●	●	●	●	●	●	●	●						
Ceiling Mounted Cassette (Compact Multi Flow)	VRT FXZQ-MVE		●	●	●	●	●												
Ceiling Mounted Cassette (Double Flow)	New FXCQ-AVM		●	●	●	●	●			●	●								
Ceiling Mounted Cassette Corner	VRT FXEQ-AV		●	●	●	●	●												
Slim Ceiling Mounted Duct	New FXDQ-PDV36 (with drain pump) VRT Smart Control	 (700 mm width type)	●	●	●														
	New FXDQ-NDV36 (with drain pump) VRT Smart Control	 (900/1,100 mm width type)	●	●	●	●	●	●											
Ceiling Mounted Duct	New FXMQ-PBV36 VRT Smart Control		●	●	●	●	●	●	●	●	●	●							
	VRT FXMQ-NVE													●	●	●			
Mid Static Ceiling Mounted Duct	New VRT FXMQ-ARV16					●	●	●		●	●								
Ceiling Suspended	VRT FXHQ-MAVE				●			●			●								
4-Way Flow Ceiling Suspended	VRT FXUQ-AVEB							●			●								
Wall Mounted	New VRT FXAQ-ARVE6 VRT Smart Control		●	●	●	●	●	●											
Floor Standing	VRT FXLQ-MAVE				●		●	●											
Concealed Floor Standing	VRT FXNQ-MAVE				●		●	●											
Floor Standing Duct	VRT FXVQ-NY1 (6)											●			●	●	●	●	
Clean Room Air Conditioner	New VRT FXBQ-PVE					●	●	●											
	VRT FXBPQ-PVE							●											

At Daikin, we offer a wide range of indoor units, including both VRV and residential models, responding to a variety of needs of our customers that require air conditioning solutions.

VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)

FXFSQ-ARV16

New



Presence of people and floor temperature can be detected to provide comfort and energy savings



Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ-MVE



Quiet, compact and designed for users comfort



Ceiling Mounted Cassette (Double Flow) Type

FXCQ-AVM

New



Add finishing touch to your ceiling, with enhancing function and design



Ceiling Mounted Cassette Corner Type

FXEQ-AVE



Slim design for flexible installation



Slim Ceiling Mounted Duct Type

FXDQ-PDV36



FXDQ-NDV36



Slim design, quietness and static pressure switching



Ceiling Mounted Duct Type

FXMQ-PBV36



FXMQ-ARV16



FXMQ-NVE

High/Mid external static pressure allows flexible installations



4-Way Flow Ceiling Suspended Type

FXUQ-AVEB



This slim and stylish indoor unit achieves optimum air distribution, and can be installed without the need for ceiling cavity.



Ceiling Suspended Type

FXHQ-MAVE



Slim body with quiet and wide airflow



Floor Standing Duct Type

FXVQ-NY16
(High static pressure type)



Large airflow type for large spaces.
Flexible interior design for each tenant.



Floor Standing Type

FXLQ-MAVE



Concealed Floor Standing Type

FXNQ-MAVE



Suitable for perimeter zone air conditioning



Wall Mounted Type

FXAQ-ARVE6

New



Stylish flat panel design
harmonised with your interior
décor



Clean Room Air Conditioner

New

FXBQ-PVE



FXBPQ-PVE

Suitable for hospitals and other clean spaces



VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)

FXFSQ25A / FXFSQ32A / FXFSQ40A /
FXFSQ50A / FXFSQ63A / FXFSQ80A /
FXFSQ100A / FXFSQ125A /
FXFSQ140A

New


VRT Smart Control



Round flow
with sensing
(Optional)

Presence of people and floor temperature can be detected to provide comfort and energy savings

Dual sensors*1

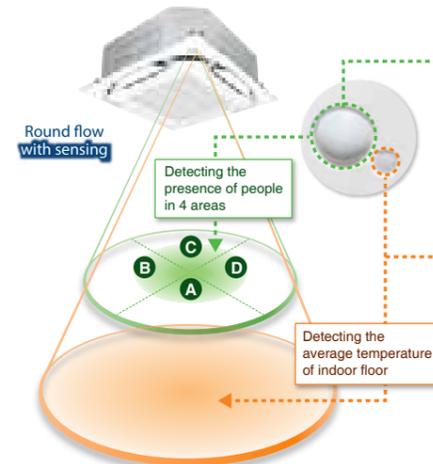

Infrared presence sensor

The 4 sensors detect human presence.

Ceiling height	2.7m	3.5m	4.0m
Detection range (diameter) ³	approx. 8.5m	approx. 11.5m	approx. 13.5m

*3. The infrared presence sensor detects 80 cm above the floor.

Infrared floor sensor

The sensor detects the floor temperature and automatically adjusts operation of the indoor unit to reduce the temperature difference between the ceiling and the floor.

Ceiling height	2.7m	3.5m	4.0m
Detection range (diameter) ⁴	approx. 11m	approx. 14m	approx. 16m

*4. The infrared floor sensor detects at the floor surface.

Various sensing functions


Sensing sensor mode*5*6

Sensing sensor low mode (default: OFF)

When there are no people in a room, the set temperature is shifted automatically.

The system automatically saves energy by detecting whether or not the room is occupied. The set temperature is shifted automatically if the room is unoccupied.

Example • Cooling setpoint: 26°C • Shift temperature: 1.0°C
• Shift time: 30 min. • Limit cooling temperature: 30°C

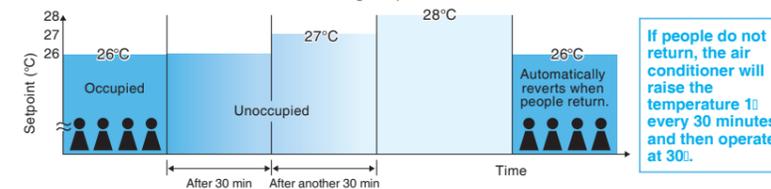

Operation is reduced in places where there are no people.



For More information 'Scan Me'

*1. Applicable when sensing panel (BYCQ140EEF6/BYCQ125EEK) is installed.
*5. These functions are not available when using the group control system.
*6. User can set these functions with remote controller.

Shift temperature and time can be selected from 0.5 to 4.0 in 0.5 increments and 15, 30, 45, 60, 90 or 120 minutes respectively with remote controller.

If people do not return, the air conditioner will raise the temperature 1.0 every 30 minutes and then operate at 30.0.

Automatically reverts when people return.

VRV Indoor Units

Sensing sensor stop mode (default: OFF)

When there are no people in a room, the system stops automatically.⁷

The system automatically saves energy by detecting whether or not the room is occupied.

Based on preset user conditions, the system automatically stops operation if the room is unoccupied.

Absent stop time can be selected from 1 to 24 hrs in 1 hr increments with remote controller.

⁷ Please note that upon re-entering the room, air conditioner will not switch on automatically.



Auto airflow function⁸


⁸Airflow direction should be set to "Auto".

New Direct Airflow (default: OFF)


Cooling Dry

When human presence is not detected

When human presence is detected

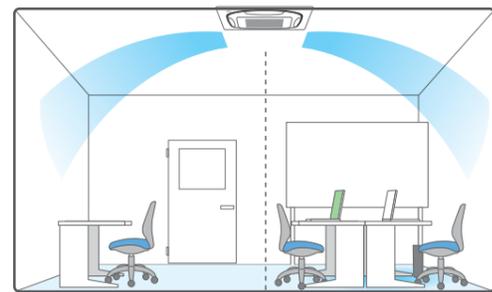

Optimal air direction by "Auto"

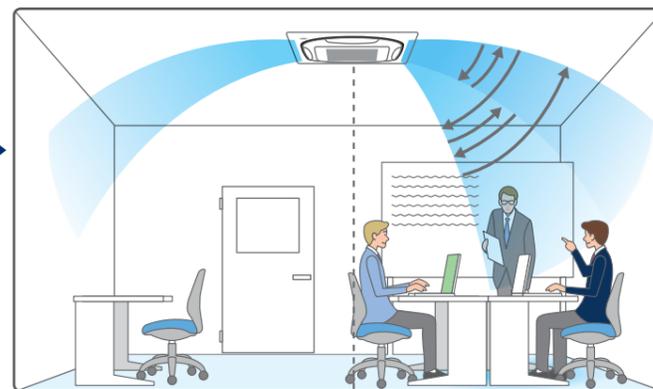

Optimal air direction by "Auto" Swing (narrow)

- With Auto airflow direction mode, flaps are controlled to deliver optimal airflow when the room is unoccupied.

- When human is detected, air direction is set to "Swing (narrow)" to deliver cool air to users.


Comfort and energy saving preventing over cooling⁹

⁹Airflow direction and airflow rate should be set to "Auto".

Floor temperature is detected and over cooling prevented.


Cooling

Without sensing function

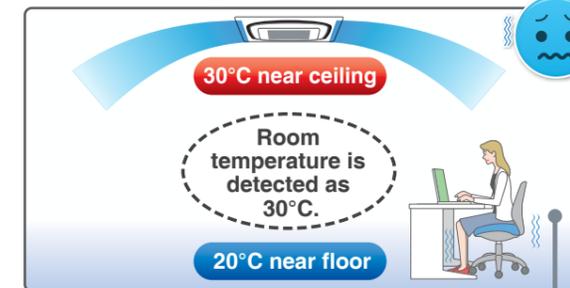

Area around feet gets too cold because air conditioner continues until the temperature near the ceiling reaches the set temperature.

With sensing function

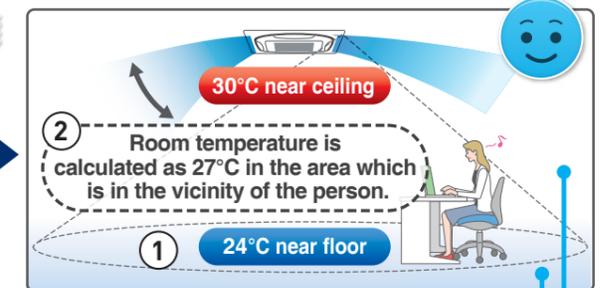


The floor temperature, which is lower than near the ceiling, is detected.

Automatic control using the temperature near the person as the room temperature.

Energy savings


The temperature near the person is automatically calculated by detecting the temperature of the floor. Energy is saved, because the area around the feet does not get too cold.

New Circulation Airflow

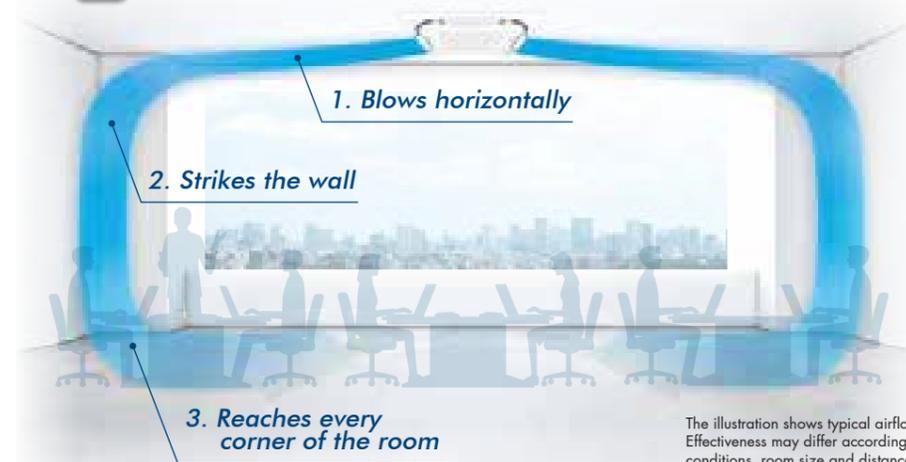


The illustration shows typical airflow. Effectiveness may differ according to room conditions, room size and distance to walls.

New Direct Airflow

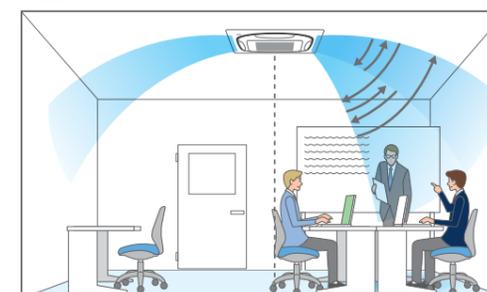

Optimal air direction by "Auto" Swing (narrow)

Individual Airflow Direction Control

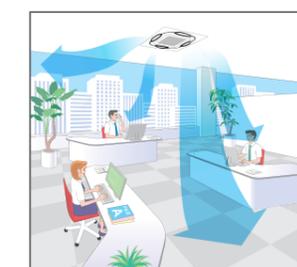

The illustration shows typical airflow.

Circulation Air Flow


*1. Applicable when wired remote controller BRC1E62 is used.
*2. Not applicable when using individual airflow direction control.

Circulation airflow cools the entire room to deliver comfort that never feels cold.

During 2-way horizontal flow



Comfort to the entire room with even temperatures and no cold air pockets at floor level

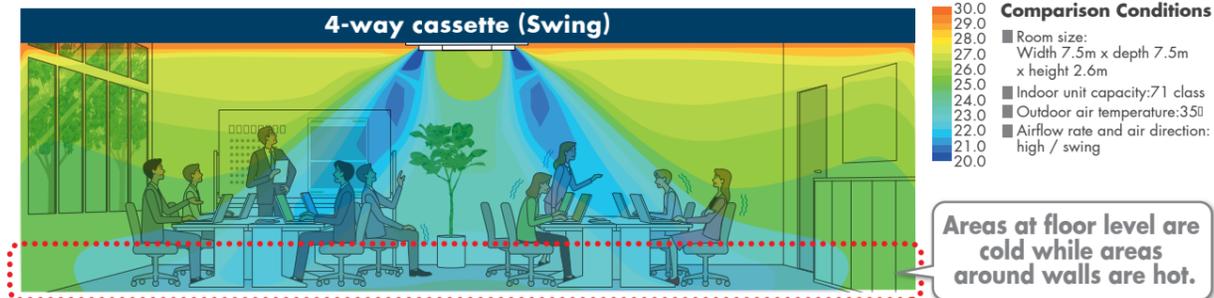


Areas at floor level are cold while areas around walls are hot.

Approx. 5% energy savings by reducing uneven temperatures

*3. Calculated under the following comparison conditions:
When the average temperature at a height of 0.6m above the floor reaches set temperature. [26°C]

Full comfort is provided with no cold feet.

Configurations of Circulation Airflow

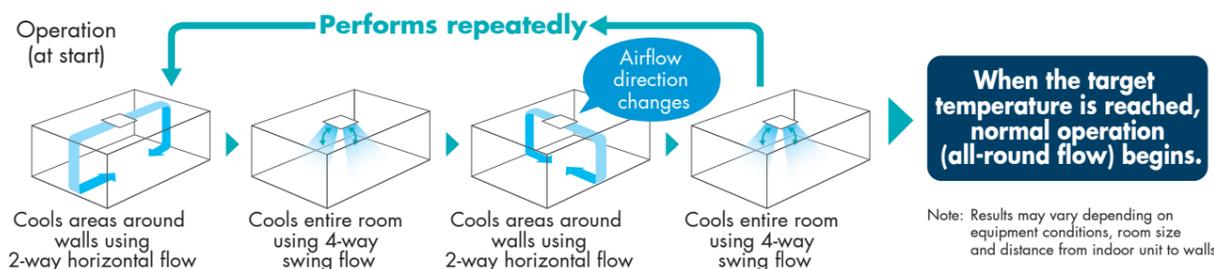


Note: Results may vary depending on equipment conditions, room size and distance from indoor unit to walls.

Three technologies that achieved circulation airflow

Flow-out is straight, horizontally and strong, so the air travels far and even reaches the wall from which it falls to the floor. This approach and technology makes circulation airflow possible.

1 Use of new wide flaps (Straight)

Compared to conventional models, the new wide flap increases straightness of the airflow, so coverage is approximately doubled.

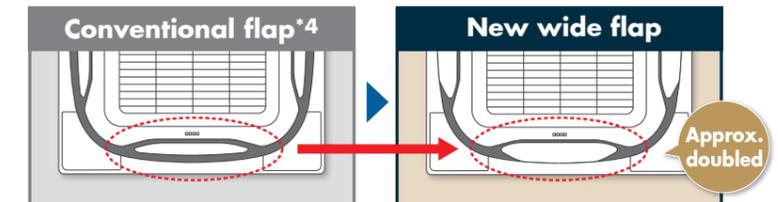

*4. FXFQ-S model


New wide flap construction inhibits ceiling dirt and grime

By tapering both flap ends, the airflow that causes dirty ceilings is directed downward.




2 Optimising airflow angle (Horizontally)

Even with the flap angle raised, a sufficient airflow route is maintained to realize a more horizontal airflow angle.

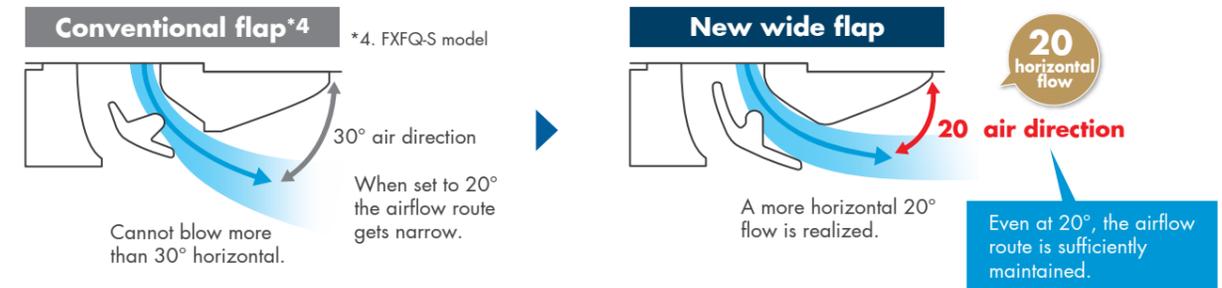

3 Increased velocity in 2-way flow (Strongly)

Velocity increased by making 2-way flow. Powerful airflow was realized.

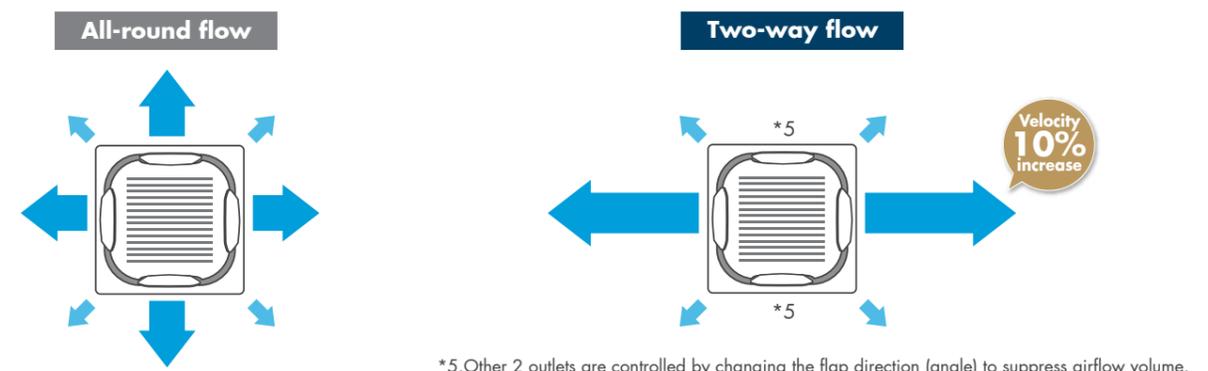

*5. Other 2 outlets are controlled by changing the flap direction (angle) to suppress airflow volume.

*1. Applicable when wired remote controller BRC1E63 is used.


Comfortable air conditioning for all room layouts and conditions

Airflow direction can be individually adjusted for each air discharge outlet to deliver optimal air distribution.

Easy setting is possible with a wired remote controller.



Position 0
(Fixed airflow to highest position)

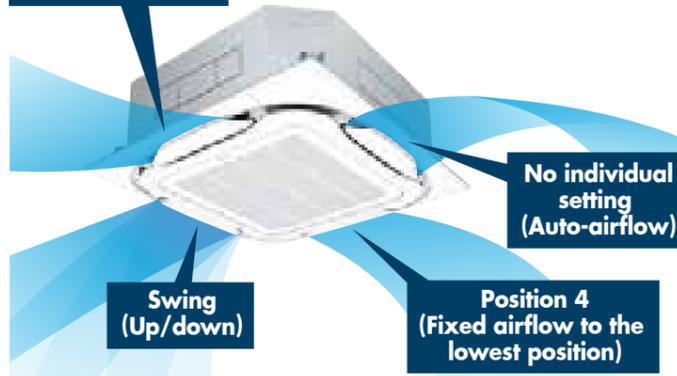


Individual airflow settings

- No individual setting (Auto airflow)
- Position 0 (Highest point)
- Position 1
- Position 2
- Position 3
- Position 4 (Lowest point)
- Swing


Individual settings are possible as stated above.

When individual airflow is selected, airflow direction can be adjusted to room layout.

For offices

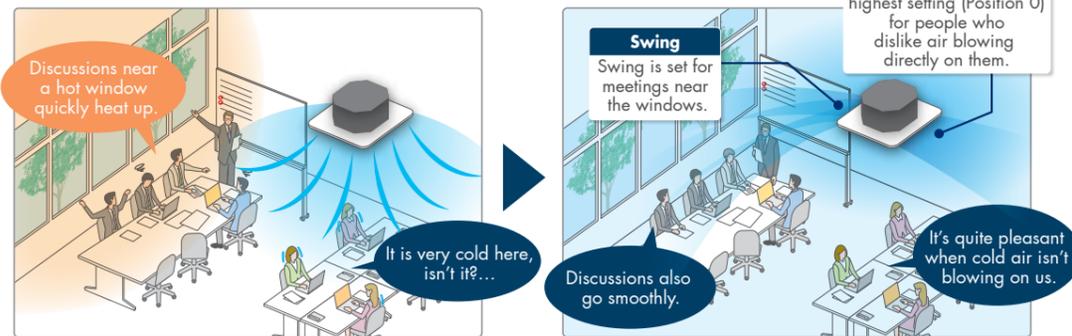

For shops and restaurant

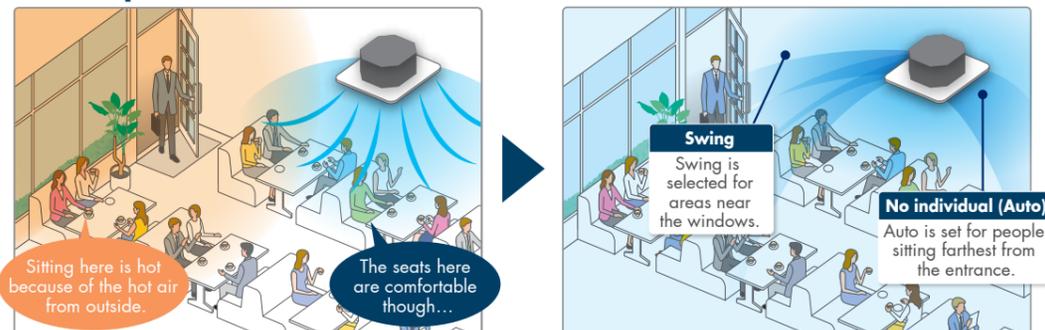

New Wide variety of decoration panels (Option)


- Designer choice has been given a boost with the increase in number of new types of decoration panels.



New Designer panel (Option)



Decoration Panel Line-up (Option)

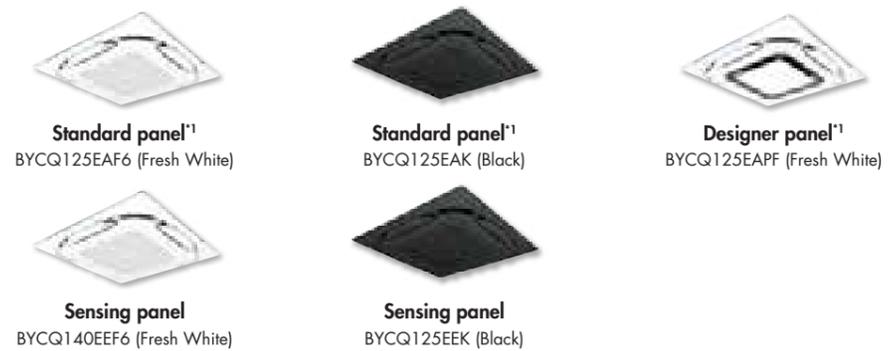

*1. Sensing function is applicable when sensing panel is installed.

New Auto grille panel (Option)*1

- Clogged filters strain performance of the indoor unit and may result in breakdowns. Impeded airflow through the filter also lowers operational efficiency, which increases electricity bills. With the auto grille, anyone can easily clean the filter, which translates to lower maintenance cost and longer life of the air conditioner.
- With the auto grille panel, motorised raising and lowering allows suction panel and air filter cleaning to be carried out without the need for a step ladder.

A dedicated wireless remote controller is supplied with the auto grille panel.

For these situations recommended


- Where the air is dusty and likely to soil the air conditioner.
- Where simple and quick filter and grille cleaning is a worthwhile benefit.





Auto grille panel*1
BYCQ125EASF (Fresh White)

Comfortable airflow

- Indoor unit offers 360° airflow discharges air in all directions with more uniform temperature distribution.




There are areas of uneven temperature.

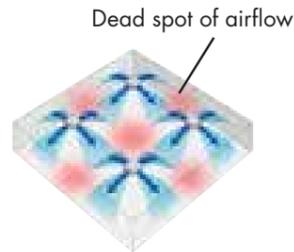

There are much fewer areas of uneven temperature.

Easy installation

- Drain pump is equipped as a standard accessory with a 850 mm lift.

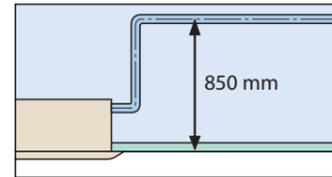


Easy maintenance

- Internal hygiene can be easily checked without removing the whole panel. Simply opening the suction panel allows the internal drain pan to be checked.



- 24 mm diameter drain outlet


The drain outlet allows insertion of a finger or dental mirror for inspection of the internal cleanliness of the drain pan. Removal of the suction panel enables access.

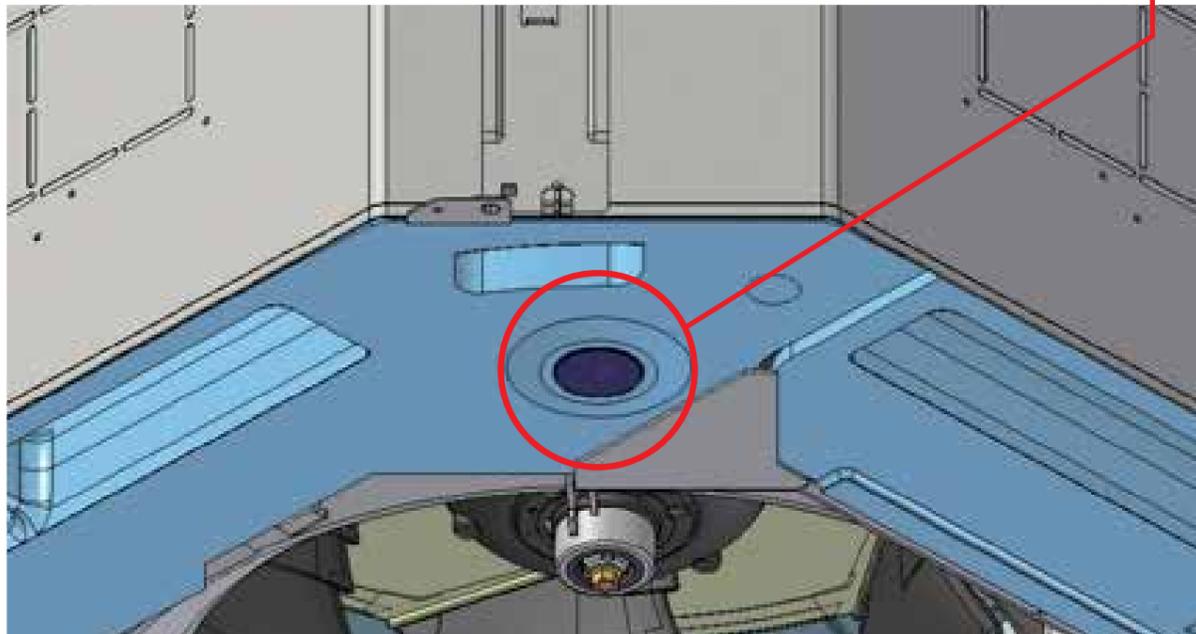


Example of airflow patterns

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.


All-round flow

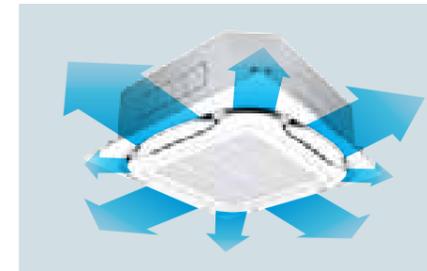


4-way flow

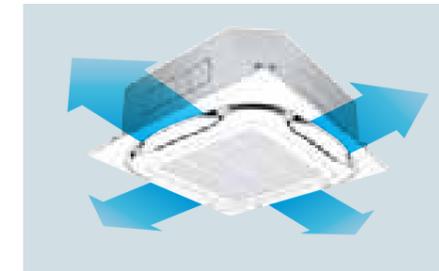

3-way flow

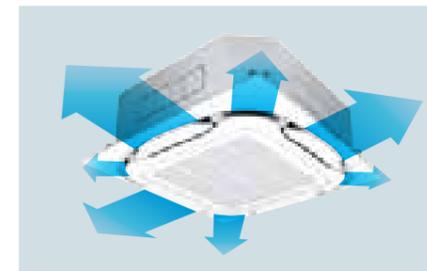

L-shaped 2-way flow

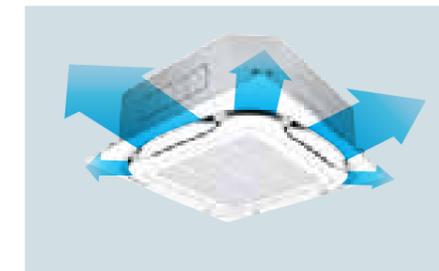

Note: Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing material (option) must be used to close each unused outlet.

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)

- The air filter has an anti-mould and antibacterial treatment that prevents the growth of mould generated from dust or moisture that may adhere to the filter.



- Control of the airflow rate can be selected from 5-step control and Auto.

VRV Indoor Units

Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ20M / FXZQ25M / FXZQ32M
FXZQ40M / FXZQ50M



Quiet, compact and designed for users comfort

- Dimensions correspond with 600 mm X 600 mm architectural module ceiling design specifications.


Low operation sound level (dB(A))

FXZQ-M	20/25	32	40	50
Sound level (H/L)	30/25	32/26	36/28	41/33


Comfortable airflow

- 1 Wide discharge angle: 0° to 60°

- Auto swing

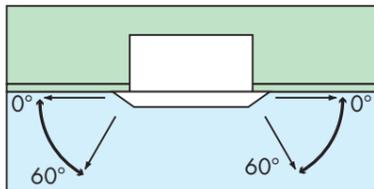


- Fixed angles: 5 levels

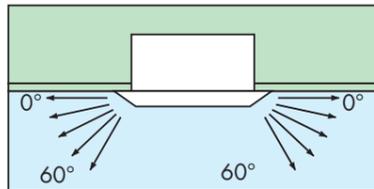

*Angles can be also set on site to prevent drafts (0°-35°) or soiling of the ceiling (25°-60°), other than standard setting (0°-60°).


- 2 2-, 3- and 4-way airflow patterns are available, enabling installation in the corner of a room.

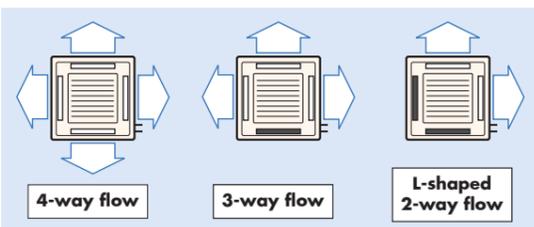

*For 3-way or 2-way flow installation, the sealing member for air discharge outlet (option) must be used to close each unused outlet.



Drain pump is equipped as standard accessory with 750 mm lift.

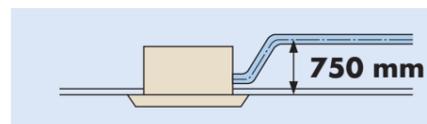

VRV Indoor Units

Ceiling Mounted Cassette (Double Flow) Type

FXCQ25AVM / FXCQ32AVM / FXCQ40AVM /
FXCQ50AVM / FXCQ63AVM / FXCQ80AVM /
FXCQ125AVM



Add finishing touch to your ceiling, with enhancing function and design.

Stylish unit blends easily with any interior. Integrated ceiling surface with sophisticated panel design with the adoption of flat flap. Add finishing touch to your ceiling, with enhancing function and design.

- Individual airflow direction control (Unavailable during automatic airflow mode, airflow angle: configurable from 0 to 4 swing positions.)

Individual flap control



The flat flaps close entirely when the unit is not operating and there are no air intake grilles visible.


- Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump.

Enhanced functions from various aspects such as maintenance

- Check contamination in drain pan by simply remove suction grille and panel.
- The flap parts are easy to clean because it is hard to condensate and get dirty.
- Equipped with long life filter which requires only 1-year maintenance interval.
- Adjuster pockets mount at four corners of the unit enable to adjust the main unit without removing the panel.
- Drain pump is equipped as standard accessory with 850 mm lift.



Adjuster Pocket

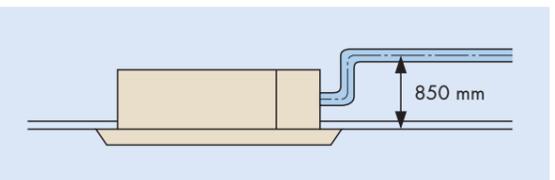

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.



(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



Drain socket part

- Easy visual inspection of drainage through the transparent body drain socket.

VRV Indoor Units

Ceiling Mounted Cassette Corner Type

**FXEQ20AV / FXEQ25AV
FXEQ32AV / FXEQ40AV
FXEQ50AV / FXEQ63AV**



Slim Design for Flexible Installation

- Single-flow type allows effective air discharge from corner or from drop-ceiling
- Dual-Flap for better air flow coverage
- United Grill design-Flap closes completely when AC is not in use
- 3D airflow-Circulates a cloud of air right to the corners of even large spaces
- Easy maintenance-Screw-less design makes panel detachment faster and easier servicing



VRV Indoor Units

Slim Ceiling Mounted Duct Type


Slim design, quietness and static pressure switching



Suited to use in drop-ceilings



FXDQ20PD / FXDQ25PD / FXDQ32PD

- Only 700 mm in width and 23 kg in weight, this model is suitable for installation in limited spaces like drop-ceilings in hotels.

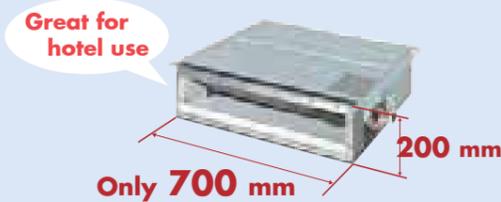

FXDQ40ND / FXDQ50ND / FXDQ63ND


- Only 200 mm in height, this model can be installed in rooms with as little as 240 mm depth between the drop-ceiling and ceiling slab.

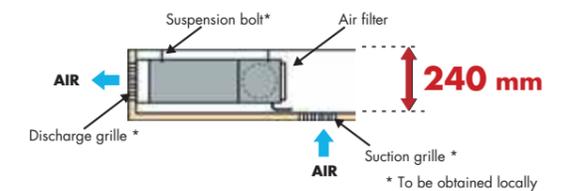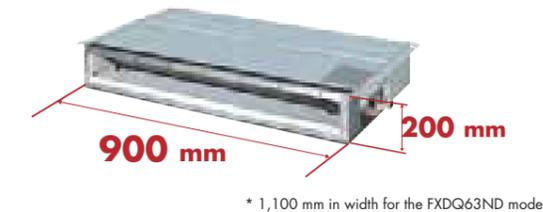

- External static pressure selectable by remote controller switching makes this indoor unit a very comfortable and flexible model.

10 Pa-30 Pa/factory set: 10 Pa for FXDQ-PD models.
15 Pa-44 Pa/factory set: 15 Pa for FXDQ-ND models.

- FXDQ-PD and FXDQ-ND models are available with a drain pump as a standard accessory.
FXDQ-PD/NDVE: with a drain pump (750 mm lift) as a standard accessory

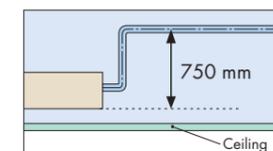

- Control of the airflow rate has been improved from 2-step to 3-step control.

Low operation sound level (dB(A))

FXDQ-PD/ND	20/25/32	40	50	63
Sound level (HH/H/L)	33/31/29	34/32/30	35/33/31	36/34/32

* The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).

* Values are based on the following conditions:
FXDQ-PD: external static pressure of 10 Pa; FXDQ-ND: external static pressure of 15 Pa.

VRV Indoor Units

High Static Pressure Ceiling Mounted Duct Type

FXMQ20P / FXMQ25P / FXMQ32P
 FXMQ40P / FXMQ50P / FXMQ63P
 FXMQ80P / FXMQ100P / FXMQ125P
 FXMQ140P




High static pressure allows for flexible duct design

- A DC fan motor increases the external static pressure capacity range to include middle to high static pressures, increasing design flexibility.
 - 30 Pa-100 Pa for FXMQ20P-32P
 - 30 Pa-160 Pa for FXMQ40P
 - 50 Pa-200 Pa for FXMQ50P-125P
 - 50 Pa-140 Pa for FXMQ140P

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.



Control of the airflow rate has been improved from 2-step to 3-step control.

Low operation sound level		(dB(A))							
FXMQ-P	20/25	32	40	50	63	80/100	125	140	
Sound level (HH/H/L)	33/31/29	34/32/30	39/37/35	41/39/37	42/40/38	43/41/39	44/42/40	46/45/43	

Energy-efficient

- The adopted DC fan motor is much more efficient than the conventional AC motor, yielding an approximate 20% decrease in energy consumption (FXMQ125P).

FXMQ170N/FXMQ200N
 FXMQ250N



Simplified Static Pressure Control

External static pressure can be easily adjusted using a change-over switch inside the electrical box to meet the resistance in the duct system.



Improved ease of installation

- Airflow rate can be controlled using a remote controller during test operations. With the conventional model, the airflow rate was controlled from the PC board. It is automatically adjusted to the range between approximately $\pm 10\%$ of the rated HH tap airflow for FXMQ20P-125P.

Improved ease of maintenance

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

VRV Indoor Units

Mid Static Pressure Ceiling Mounted Duct Type

FXMQ40A / FXMQ50A / FXMQ63A
 FXMQ80A / FXMQ100A




Mid static pressure allows for flexible duct design

- AC fan motor is installed to suit applications where external static pressure is required at nominal capacity.
 - 30 Pa-50 Pa for FXMQ40-80ARV16
 - 30 Pa-60 Pa for FXMQ100ARV16

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.



High airflow rate

Airflow rate is optimised to meet wider spectrum of airflow requirements.

Low operation sound level		(dB(A))				
FXMQ-A	40	50	63	80	100	
Sound level (H/L)	39/37	41/39	42/40	43/41	44/42	

Improved ease of maintenance

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.



VRV Indoor Units

Ceiling Suspended Type

FXHQ32 / 63 / 100MA

New FXHQ125 / 140A

Slim body with quiet and wide airflow




New 125 / 140 models provide greater capacity for large spaces

- The technology of the DC fan motor, wide sirocco fan, and large heat exchanger combine for greater airflow and quiet operation.

- Sophisticated design
 - Flap neatly closes when not in use.



- Suitable for high ceilings

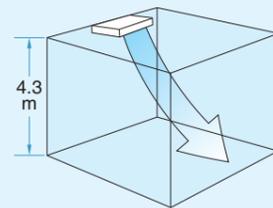

- Switchable fan speed: 3 steps
 - Control of airflow rate has been improved from 2-step to 3-step.

- Drain pump kit (option) includes a silver ion antibacterial agent that assists in preventing the growth of slime, bacteria, and mould that cause smells and clogging.

- Wireless LCD remote controller

- A signal receiver must be added to the indoor unit.



BRC7M56




Signal receiver unit (Installed type)
Wireless remote controller is supplied in a set with a signal receiver.




Comfort

- Auto swing (up and down) and louvers (left and right by hand) bring comfort to the room.
- Louver manually adjusts for straight or wide angle airflow.

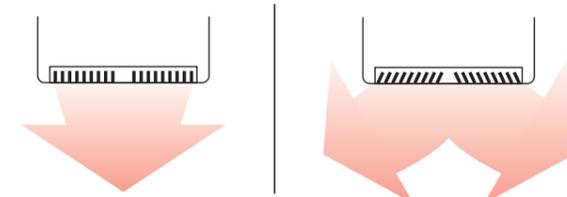

Quiet operation

- Uses quiet stream fan and other quiet technologies. (FXHQ32-100MA)

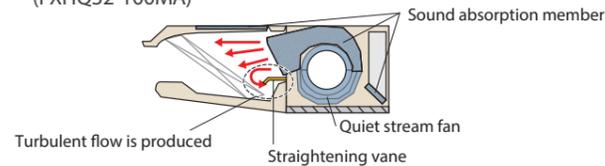


Indoor unit	Sound level		
	H	M	L
FXHQ32MA	36	—	31
FXHQ63MA	39	—	34
FXHQ100MA	45	—	37
FXHQ125A	46	41	37
FXHQ140A	48	42	37

VRV Indoor Units

Easy maintenance

- Non-dew flap
 - Condensation does not easily form on and dirt does not cling to non-dew flap. It is easy to clean.
- Easy-clean, flat surfaces
 - It is easy to wipe dirt off the flat side and lower surfaces of the unit.
- Oil-resistant plastic is used for the air suction grille. This satisfies durability in restaurants and other similar environments.




Non-dew flap

Note: Intended for use in salons, dining rooms, and ordinary sales floors, this specification is not suitable for kitchens or other harsh environments.

Installation flexibility


- Flexible installation
 - The unit fits more snugly into tight spaces. [Required installation space (mm)]

*Water used in the test-run can be drained from the air discharge opening rather than from the side as was formerly the case.

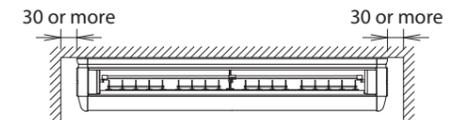


- Drain pump kit (option) can be easily incorporated.

- Drain pipe connection can be done inside the unit. Refrigerant and drain pipe outlets are at the same opening.

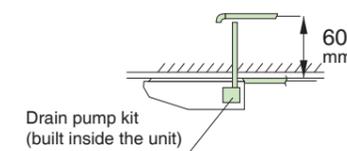

- All wiring and internal servicing can be done from under the unit.

- Easier piping work for rear side by removable frame



VRV Indoor Units

Wall Mounted Type

**FXAQ20A / FXAQ25A
FXAQ32A / FXAQ40A
FXAQ50A / FXAQ63A**



Stylish flat panel design harmonised with your interior décor



- Stylish flat panel design creates a graceful harmony that enhances any interior space.
- Flat panel can be cleaned with only the single pass of a cloth across their smooth surface.
- Vertical auto-swing realises efficiency of air distribution. The louvre closes automatically when the unit stops.

VRV Indoor Units

Floor Standing Type

**FXLQ32MA / FXLQ50MA
FXLQ63MA**



Suitable for perimeter zone air conditioning

- Floor Standing types can be hung on the wall for easier cleaning. Running the piping from the back allows the unit to be hung on walls. Cleaning under the unit, where dust tends to accumulate, is considerably easier.
- The adoption of a fibre-less discharge grille, featuring an original design to prevent condensation, also helps prevent staining and makes cleaning easier.
- A long-life filter is equipped as standard accessory.
*8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m³




Concealed Floor Standing Type

**FXNQ32MA / FXNQ50MA
FXNQ63MA**



Designed to be concealed in the perimeter skirting-wall

- The unit is concealed in the skirting-wall of the perimeter, that creates a classy interior design.
- The connecting port faces downwards, greatly facilitating on-site piping work.
- A long-life filter is equipped as a standard accessory.

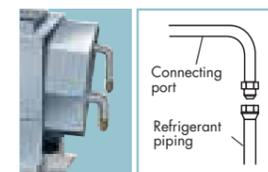

* Applies also to Floor Standing type (FXLQ-MA).

* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m³



VRV Indoor Units


Floor Standing Duct Type

**FXVQ125N / FXVQ200N
FXVQ250N / FXVQ400N
FXVQ500NY16**



**Large airflow type for large spaces.
Flexible interior design for each customer.**

- Large airflow type that fits for spacious areas such as factories and large stores.
- Various installations can be supported from full-scale duct connection airflow to direct airflow that allows for easy installation.
- Full-scale duct connection airflow allows for air conditioning evenly in spacious areas.

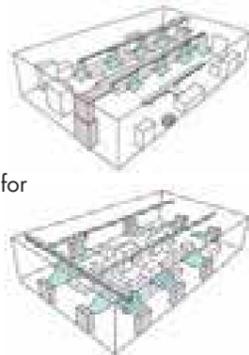

Duct connection airflow type

- Adding the plenum chamber (option) allows for simple operation with direct airflow.

* Note that the operation sound increases by approximately 5 dB(A).


Direct airflow type

- The high static pressure type driven by the belt drive system allows the usage of air discharge outlets in various shapes as well as long ducts. Highly flexible installation is possible.
- High maintainability design that allows major services and maintenance services to be performed at the front.
- A long-life filter is equipped as a standard accessory. *8 hr/day, 26 day/month. For dust concentration of 0.15 mg/m³
- A wide range of optional accessories is available such as high-efficiency filters.



- Outdoor air intake mode is useable as an outdoor-air processing air conditioner.

*When using the unit as an outdoor-air processing unit, there are some restrictions.

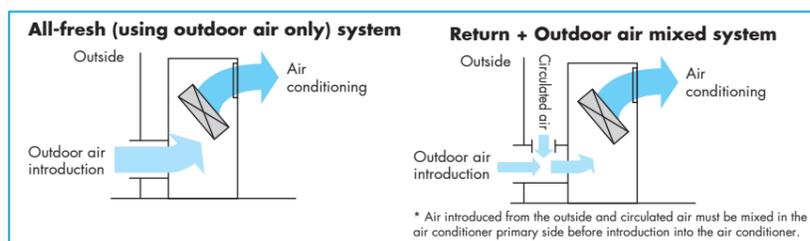

VRV Indoor Units



4-Way Flow Ceiling Suspended Type

FXUQ71A / FXUQ100A




This slim and stylish indoor unit achieves optimum air distribution and can be installed without a ceiling cavity.

- Unit body and suction panel adopted round shapes and realized a slim appearance design. The unit can be used for various locations such as the ceilings with no cavity and bore ceilings.
- Flaps close automatically when the unit stops, which gives a simple appearance.
- Unified slim height of 198 mm for all models that gives the unified impression even when models with different capacities are installed in the same area.
- Built-in electronic expansion valve eliminates the need for a BEV unit, which improves flexibility of installation.

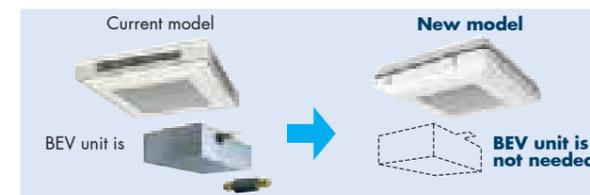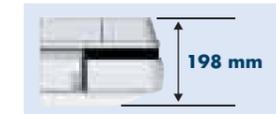


- With adoption of the individual flap control, airflow direction adjustment can be individually set for each air outlet. Five directions of airflow and auto-swing can be selected with wired remote controller BRC1E62, which realizes the optimum air distribution.

Individual airflow direction example case

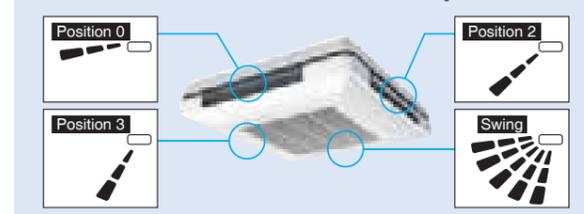

- Control of the airflow rate has been improved from 2-step to 3-step control. Auto airflow rate control can be selected with wired remote controller BRC1E62.
- Energy efficiency has been improved, thanks to the adoption of new heat exchanger with smaller tubes, DC fan motor and DC drain pump motor.
- Drain pump is equipped as a standard accessory and the lift height has been improved from 500 mm to 600 mm.
- Depending on the installation site requirements or room conditions, 2-way, 3-way and 4-way discharge patterns are available.

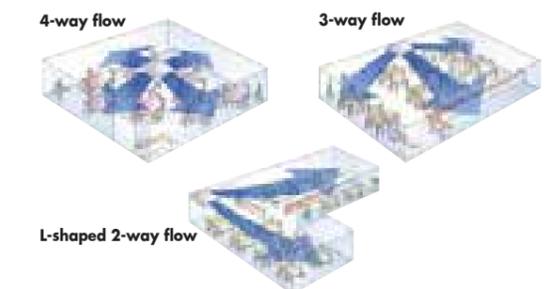

VRV Indoor Units

Clean Room Type Air Conditioner

**FXBQ40/FXBQ50
FXBQ63/FXBPQ63**



Suitable for hospitals and other clean spaces

Easily provides the high cleanliness environment required by various industries

Daikin's clean room air conditioners are specially designed to achieve an environment cleanliness class 10,000. These air conditioners easily realize a cleanliness-class environment and help create a proper environment of hospitals, food and beverage factories, electronics factories and other spaces that require clean air.

Select the air flow system and installation method to match the layout and purpose of the room

Two types of clean room air conditioners are available – an integrated unit model and a separate outlet unit model. It is also possible to configure the air flow system to ceiling intake or floor-level intake according to the panel selected. This flexible design enables the air conditioner to easily adopt to any room layout or use.

Instances of installation by type (for a hospital)

Type	Ceiling intake type (high speed contracted flow/high ceiling model)	Floor-level intake type (gentle wind distribution/high cleanliness class model)
Features	Construction work is simple and a ceiling installation is possible. Dust filtering and air-conditioning can be started immediately.	Easy to increase the cleanliness and air-conditioning effect. A low flow speed prevents drying of the affected part and the experience of drafts.
Cleanliness class*1	100,000 to 10,000	10,000
Wind speed	1.0m/s or higher	Approximately 0.5m/s
Blow method	Integrated outlet unit model <ul style="list-style-type: none"> Concentrated air conditioning centered directly under the unit Easy installation <p>Applications: Surgery prep rooms, recovery rooms, nurse stations, etc.</p>	<ul style="list-style-type: none"> Total air conditioning with an emphasis on cleanliness <p>Applications: Operating theatres, delivery rooms, etc.</p>
	Separate outlet unit model <ul style="list-style-type: none"> Somewhat concentrated air conditioning centered directly under the outlet Can provide air conditioning in rooms with irregular shapes <p>Applications: CCU*2, sterile rooms, etc.</p>	<ul style="list-style-type: none"> Total air conditioning with an emphasis on cleanliness Maintenance possible from a different room <p>Applications: Premature nurseries, newborn nurseries, ICU*3, etc.</p>


*1. Cleanliness class. A scale expressing the cleanliness of air established by NASA (National Aeronautics and Space Administration). Class 10,000 represents a state of less than 10,000 minute particles of diameter under 0.5 μm per cubic foot. For comparison, the cleanliness of a typical office is around class 1,000,000.
 *2. CCU (Cardiac Care Unit). A ward dedicated to the admission of patients with myocardial infarctions and other heart diseases.
 *3. ICU (Intensive Care Unit). A ward for the careful treatment and nursing of patients with serious illnesses, injuries, or recovering from operations.

Can be easily installed in existing buildings

A simple structure makes it easy to realize a highly clean environment with the same installation work as for a typical air conditioner. Can be easily installed in new buildings, existing structures and refurbishments.

Prevents uncomfortable drafts with a low flow speed of approximately 0.5m/s

The floor-level intake system has a low flow speed of approximately 0.5 m/s, improving dust filtration and eliminating the feeling of drafts. Broadly air-conditions the room with a gentle air flow and creates a comfortable environment.

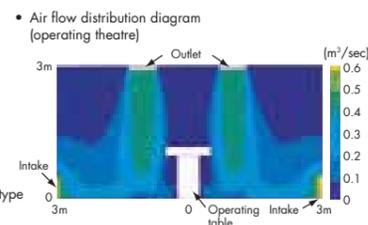

*Analysis of the floor-level intake type with the integrated outlet model.


Filtration

Class 10,000 clean room condition achieved with a HEPA filter (sold separately)

The low pressure-loss HEPA filter (sold separately) demonstrates superior dust filtering performance and easily accomplishes an air cleanliness of class 10,000.

The HEPA filter has a structure incorporating a pleated glass fibre filter medium, making it highly efficient and suitable for clean rooms, etc.

• HEPA filter

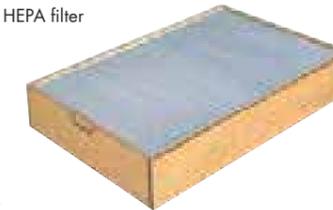

*It may not be possible to maintain cleanliness in rooms with low air tightness.

FXB(P)Q-P



Installation example (in a medical facility)


Antibacterial

Suppresses the propagation of bacteria in the duct with a proprietary antibacterial coating

The filter implements an antibacterial treatment with a new coating, combining a silver-based inorganic antibacterial material (an organic antibacterial material that is effective against germs) that prevents mould. This enhances the antibacterial properties of the duct. An antibacterial treatment using a silver-based organic substance reduces mould.

Antibacterial fibre used in the intake filter

With a long-life filter employing anti-mould antibacterial fibre near the intake, cleaning performance is further enhanced.

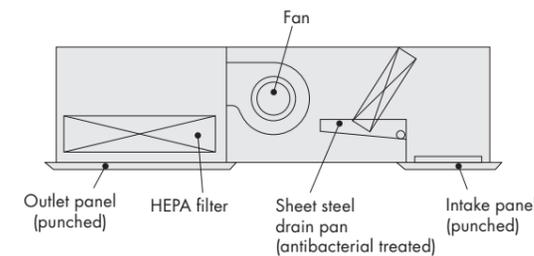

• Please be aware that antibacterial products suppress the propagation of bacteria but do not have a sterilising effect. Also, mould may grow in places where dust or soot accumulates.
 • A material for which the registered safety was verified by Japanese chemicals and dangerous substances regulation law (Act on the Evaluation of Chemical Substances and Regulation of Their Manufacture, etc.) is used for the antibacterial material.
 • Periodic maintenance is required (such as cleaning the air filter and washing the inside to the unit).


Labour-saving

Filter maintenance unnecessary for about five years

Easy access from underneath unit provides easy maintenance

The HEPA filter has an exceptionally long life and does not require maintenance for about five years. Daikin has aimed to reduce maintenance work from a variety of perspectives, including a service access system that eliminates the necessity for service panels.

*The maintenance period differs significantly according to the cleanliness of the room and hours of air conditioner operation.

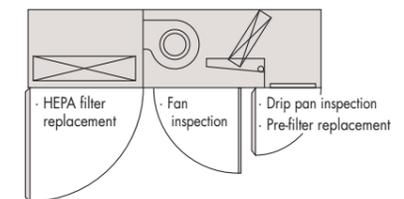

Quiet

All models incorporate an industry-leading quiet design, operating at under 41dB

Operating noise is substantially reduced by employing a proprietary double-structure outlet filter chamber, sound absorbing insulation and a low pressure-loss HEPA filter. Sound level of all models are under 41 dB (38dB during low-fan speed operation).

*Operating noise may be greater than these values in highly reflective locations.



VRV X SPECIFICATIONS

VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)



MODEL		FXFSQ25ARV16	FXFSQ32ARV16	FXFSQ40ARV16	FXFSQ50ARV16	FXFSQ63ARV16	FXFSQ80ARV16	FXFSQ100ARV16	FXFSQ125ARV16	FXFSQ140ARV16
Power supply		1-phase, 220-240V, 50Hz								
Cooling capacity	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	38,200	47,800	54,600
	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0
Heating capacity	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	42,700	54,600	54,600
	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	16.0
Casing		Galvanised steel plate								
Airflow rate (H/HM/M/ML/L)	m ³ /min	13/12.5/11.5/11/10	17/13.5/12.5/12/11	23/20.5/19/14.5/11	23.5/21/20/16/13.5	24.5/22/20.5/20/15	33.5/30.5/27/23.5/21	34.5/31.5/28.5/25.5/23	35.5/32.5/29.5/26.5/23	35.5/32.5/29.5/26.5/23
	cfm	459/441/406/388/353	600/477/441/424/388	812/724/671/512/388	830/742/706/565/477	865/777/724/706/530	1,183/1,077/954/830/742	1,218/1,112/1,006/901/812	1,254/1,148/1,042/936/812	1,254/1,148/1,042/936/812
Sound level (H/HM/M/ML/L)	dB(A)	30/29.5/28.5/28/27	35/29.5/29/28/27	38/35/34.5/29.5/27	38/36/35.5/31.5/28	39/37/36/35.5/31	44/41/38/35/33	45/42.5/39.5/37/35	46/43.5/40.5/38/35	46/43.5/40.5/38/35
Dimensions (HxWxD)	mm	256x840x840						298x840x840		
Machine weight	kg	19			22		25		26	
Piping connections	Liquid (Flare)	Ø 6.4			Ø 9.5					
	Gas (Flare)	Ø 12.7			Ø 15.9					
	Drain	VP25 (External Dia, 32/Internal Dia, 25)								
Standard Panel (Non Sensing) (White)	Model	BYCQ125EAF6 (Fresh White)								
	Dimensions (HxWxD)	50x950x950								
	Weight	5.5								
Sensing Panel (White)	Model	BYCQ140EEF6 (Fresh White)								
	Dimensions (HxWxD)	50x950x950								
	Weight	5.5								

Note: Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



For More information
'Scan Me'

Decoration Panel (Option)

		Round Flow Type	
		FXFSQ-A	
Standard panel	Model	BYCQ125EAF6 (Fresh White) / BYCQ125EAK (Black)	
	Dimensions (HxWxD)	50x950x950	
	Weight	5.5	
Sensing panel	Model	BYCQ140EEF6 (Fresh White) / BYCQ125EEK	
	Dimensions (HxWxD)	50x950x950	
	Weight	5.5	
Designer panel	Model	BYCQ125EAPF (Fresh White)	
	Dimensions (HxWxD)	97x950x950	
	Weight	6.5	
Auto grille panel	Model	BYCQ125EASF (Fresh White)	
	Dimensions (HxWxD)	105x950x950	
	Weight	8	



Standard panel
BYCQ125EAF6 (Fresh White)



Standard panel
BYCQ125EAK (Black)




Designer panel
BYCQ125EAPF (Fresh White)



Sensing panel
BYCQ140EEF6 (Fresh White)



Sensing panel
BYCQ125EEK (Black)

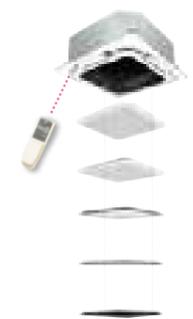

Auto grille panel²
BYCQ125EASF (Fresh White)

Note: When opting Black panel, wireless remote controller model will be BRC7M634K

VRV Indoor Units

Ceiling Mounted Cassette (Compact Multi-Flow) Type



MODEL		FXZQ20MVE9	FXZQ25MVE9	FXZQ32MVE9	FXZQ40MVE9	FXZQ50MVE9
Power supply		1-phase, 220-240 V/220 V, 50 Hz				
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Casing		Galvanised steel plate				
Airflow rate (H/L)	m ³ /min	9/7		9.5/7.5	11/8	14/10
	cfm	318/247		335/265	388/282	493/353
Sound level (H/L) 230 V	dB(A)	30/25		32/26	36/28	41/33
Dimensions (HxWxD)		286x575x575				
Machine weight		18				
Piping connections	Liquid (Flare)	ø 6.4				
	Gas (Flare)	ø 12.7				
	Drain	VP20 (External Dia, 26/Internal Dia, 20)				
Panel (Option)	Model	BYFQ60B3W1				
	Colour	White (6.5Y9.5/0.5)				
	Dimensions(HxWxD)	55x700x700				
	Weight	2.7				

Note: Specification are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Ceiling Mounted Cassette Corner Type



MODEL		FXEQ20AV36	FXEQ25AV36	FXEQ32AV36	FXEQ40AV36	FXEQ50AV36	FXEQ63AV36	
Power supply		1-phase, 230V, 50 Hz						
Cooling Capacity	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200	
	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating Capacity	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300	
	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Casing/Colour		Galvanised steel plate						
Dimensions (HxWxD)		200x840x470				200x1240x470		
Airflow Rate (H/HM/M/ML/L)	Cooling	m ³ /min	6.0/5.4/4.9/4.4/4	6.9/6.4/5.8/5.3/4	8.0/7.5/7.0/6.3/5	9.8/8.8/7.8/7.0/6	12.5/11.4/10.4/9.5/8	15.0/13.6/12.2/11.4/9.8
		cfm	212/191/173/155/141	244/226/205/187/169	282/265/247/222/194	346/311/275/247/219	441/402/367/335/307	530/480/431/388/346
Piping connections	Liquid Pipes	ø 6.4 (Flare Connection)						
	Gas Pipes	ø 12.7 (Flare Connection)						
	Drain Pipe	PVC 26 (External dia. 26) (Internal dia. 20)						
Mass		17			18		23	
Sound Pressure Level (H/HM/M/ML/L)	Cooling	dB (A)	30/29/28/27/26	32/31/30/29/28	35/34/33/32/30	38/37/35/33/31	43/41/39/37/35	
Decoration Panel (Options)	Model	BYEP40AW16				BYEP63AW16		
	Panel Colour	Fresh White						
	Dimensions (HxWxD)	80x950x550				80x1350x550		
	Air Filter	Resin net (with mould resistance)						
	Mass	8				10		

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: (FXEQ-M) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- (FXEQ-AV) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Ceiling Mounted Cassette (Double Flow) Type



MODEL		FXCQ25AVM	FXCQ32AVM	FXCQ40AVM	FXCQ50AVM	FXCQ63AVM	FXCQ80AVM	FXCQ125AVM
Power supply		1-phase, 220-240 V/50 Hz						
Cooling capacity	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	47,800
	kW	2.8	3.6	4.5	5.6	7.1	9.0	14.0
Heating capacity	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	54,600
	kW	3.2	4.0	5.0	6.3	8.0	10.0	16.0
Casing		Galvanised steel plate						
Airflow rate (HH/M/L)	m ³ /min	11.5/10.5/9.5/8.5/8		12/11/10.5/9.5/8.5	15/14/13/11.5/10.5	16/15/14/12.5/11.5	26/24/22.5/20.5/18.5	32/29.5/27.5/25/22.5
	cfm	406/371/335/300/282		424/388/371/335/300	530/494/459/406/371	565/530/494/441/406	918/847/794/724/653	1130/1041/971/883/794
Sound level (H/L) 220 V	dB(A)	34/33/31/30/29	34/33/32/31/30	36/35/33/32/31	37/36/35/33/31	39/38/37/35/32	42/40/38/36/33	46/44/42/40/38
Dimensions (HxWxD)		305x775x620			305x990x620		305x1,445x620	
Machine weight		19		22	25	33	38	
Piping connections	Liquid (Flare)	ø6.4			ø9.5			
	Gas (Flare)	ø12.7			ø15.9			
	Drain	VP25 (External Dia, 32/Internal Dia, 25)						
Panel (Option)	Model	BYBCQ40CF		BYBCQ63CF		BYBCQ125CF		
	Colour	Fresh white (6.5Y 9.5/0.5)						
	Dimensions(HxWxD)	55x1,070x700			55x1,285x700		55x1,740x700	
	Weight	10		11		13		

Slim Ceiling Mounted Duct Type (700 mm width type)



MODEL	with drain pump	FXDQ20PDV36	FXDQ25PDV36	FXDQ32PDV36
Power supply		1-phase, 220-240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	7,500	9,600	12,300
	kW	2.2	2.8	3.6
Heating capacity	Btu/h	8,500	10,900	13,600
	kW	2.5	3.2	4.0
Casing		Galvanised steel plate		
Airflow rate (HH/H/L)	m ³ /min	8.0/7.2/6.4		8.0/7.2/6.4
	cfm	282/254/226		282/254/226
External static pressure		30-10 ⁻²		
Sound level (HH/H/L) ***)		33/31/29		33/31/29
Dimensions (HxWxD)		200x700x620		200x700x620
Machine weight		23.0		
Piping connections	Liquid (Flare)	ø 6.4		
	Gas (Flare)	ø 12.7		
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

VRV Indoor Units

Slim Ceiling Mounted Duct Type (900/1,100 mm width type)



MODEL	with drain pump	FXDQ40NDV36	FXDQ50NDV36	FXDQ63NDV36
Power supply		1-phase, 220-240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	15,400	19,100	24,200
	kW	4.5	5.6	7.1
Heating capacity	Btu/h	17,100	21,500	27,300
	kW	5.0	6.3	8.0
Casing		Galvanised steel plate		
Airflow rate (HH/H/L)	m ³ /min	10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
	cfm	371/335/300	441/388/353	583/512/459
External static pressure	Pa	44-15 ²		
Sound level (HH/H/L) **3	dB(A)	34/32/30	35/33/31	36/34/32
Dimensions (HxWxD)	mm	200x900x620	200x900x620	200x1,100x620
Machine weight	kg	27.0	28.0	31.0
Piping connections	Liquid (Flare)	Ø 6.4		
	Gas (Flare)	Ø 12.7		
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

Note: Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
 - * 1: Values are based on the following conditions: FXDQ-P: external static pressure of 10 Pa; FXDQ-N: external static pressure of 15 Pa.
 - * 2: External static pressure is changeable to set by the remote controller. This pressure means "High static pressure - Standard". (Factory setting is 10 Pa for FXDQ-P models and 15 Pa for FXDQ-N models.)
 - * 3: The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).

Mid Static Pressure Ceiling Mounted Duct Type



MODEL	with drain pump	FXMQ40ARV16	FXMQ50ARV16	FXMQ63ARV16	FXMQ80ARV16	FXMQ100ARV16
Power supply		1-phase, 220-240 V, 50 Hz				
Cooling capacity	Btu/h	15,400	19,100	24,200	30,700	38,200
	kW	4.5	5.6	7.1	9.0	11.2
Heating capacity	Btu/h	17,100	21,500	27,300	34,100	42,700
	kW	5.0	6.3	8.0	10.0	12.5
Casing		Galvanized Steel Plate				
Airflow rate (HH/H/L)	m ³ /min	15/12	19/16	24/20	30/25	34/29
	cfm	530/425	671/565	848/706	1060/883	1200/1024
External static pressure	Pa	30-50				30-60
Sound level (H/L)	dB(A)	39/37	41/39	42/40	43/41	44/42
Dimensions (HxWxD)	mm	300x700x700		300x1000x700		
Machine weight	kg	27	28	35	36	
Piping connections	Liquid (Flare)	6.4 (Flare Connection)		9.5 (Flare Connection)		
	Gas (Flare)	12.7 (Flare Connection)		15.9 (Flare Connection)		
	Drain	VP25 (External Dia. 32, Internal Dia. 25)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.

Ceiling Mounted Duct Type



MODEL	FXMQ20PVE	FXMQ25PVE	FXMQ32PVE	FXMQ40PBV36	FXMQ50PBV36	
Power supply	1-phase, 220-240 V/220 V, 50 Hz					
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Casing		Galvanised steel plate				
Airflow rate (HH/H/L)	m ³ /min	9/7.5/6.5		9.5/8/7	16/13/11	18/16.5/15
	cfm	318/265/230		335/282/247	565/459/388	635/582/530
External static pressure	Pa	30-100 (50) *2			30-160 (100) *2	50-200 (100) *2
Sound level (HH/H/L)	dB(A)	33/31/29		34/32/30	39/37/35	41/39/37
Dimensions (HxWxD)	mm	300X550X700			300X700X700	300X1,000X700
Machine weight	kg	25			27	35
Piping connections	Liquid (Flare)	Ø 6.4				
	Gas (Flare)	Ø 12.7				
	Drain	VP25 (External Dia, 32/Internal Dia, 25)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
 - 1: Power consumption values are based on conditions of rated external static pressure.
 - 2: External static pressure can be modified using a remote controller that offers seven (FXMQ20-32P), thirteen (FXMQ40P), fourteen (FXMQ50-125P) or ten (FXMQ140P) levels of control. These values indicate the lowest and highest possible static pressures. The standard static pressure is 50 Pa for FXMQ20-32P and 100 Pa for FXMQ40-140P.

VRV Indoor Units

Ceiling Mounted Duct Type



Heating capacity

MODEL		FXMQ170NVE6	FXMQ200NVE6	FXMQ250NVE6
Power supply		1-phase, 220, 240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	65,800	76,400	95,500
	kW	19.3	22.4	28
Heating capacity	Btu/h	71,600	83,300	1,07,500
	kW	21	25	31.5
Casing		Galvanised steel plate		
Airflow rate (H/L)	m ³ /min	58/50	68/58	80/73
	cfm	2,047/1,765	2400/2,047	2,825/2,578
External static pressure		100-140*2		190-270*2
Sound level (H/L) 220V		45/42		49/47
Dimensions (HxWxD)		440x1,190x1,090		440x1,490x1,090
Machine weight		110		130
Piping connections	Liquid (Flare)	ø 9.5		
	Gas (Flare)	ø 19.1		ø 22.2
	Drain	External Dia 32		

4-way Flow Ceiling Suspended Type



MODEL		FXUQ71AVEB	FXUQ100AVEB
Power supply		1-phase, 220-240 V/220-230V, 50 Hz	
Cooling capacity	Btu/h	27,300	38,200
	kW	8.0	11.2
Heating capacity	Btu/h	30,700	42,700
	kW	9.0	12.5
Casing		Fresh white	
Airflow rate (H/L)	m ³ /min	22.5/19.5/16	31/26/21
	cfm	794/688/565	1,094/918/741
Sound level (H/M//L)		40/38/36	
Dimensions (HxWxD)		198x950x950	
Machine weight		26	
Piping connections	Liquid (Flare)	9.5	
	Gas (Flare)	15.9	
	Drain	VP20 (External Dia, 26/Internal Dia, 20)	

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Ceiling Suspended Type



MODEL		FXHQ32MAVE	FXHQ63MAVE	FXHQ100MAVE	FXHQ125AVM	FXHQ140AVM
Power supply		1-phase, 220-240 V/220 V, 50/60 Hz			1-phase, 220-240 V/220-230 V, 50/60 Hz	
Cooling capacity	Btu/h	12,300	24,200	38,200	48,000	52,900
	kW	3.6	7.1	11.2	14.1	15.5
Heating capacity	Btu/h	13,600	27,300	42,700	54,600	58,000
	kW	4.0	8.0	12.5	16.0	17.0
Airflow rate (H/M/L)	m ³ /min	12/-/10	17.5/-/14	25/-/19.5	34/26/20	36/27/20
	cfm	424/-/353	618/-/494	883/-/688	1,200/918/706	1,271/953/706
Sound level (H/M/L)		36/-/31		39/-/34	45/-/37	46/41/37
Dimensions (HxWxD)		195x960x680		195x1,160x680	195x1,400x680	235x1,590x690
Machine weight		24		28	33	41
Piping connections	Liquid (Flare)	ø 6.4		ø 9.5		
	Gas (Flange)	ø 12.7		ø 15.9		
	Drain	VP20 (External Dia. 26/Internal Dia. 20)				

Note: Specifications are based on the following conditions

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: (FXHQ-MA) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. (FXHQ-AV) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- 1: Power consumption values are based on conditions of standard external static pressure.
- 2: External static pressure is changeable to change over the connectors inside electrical box, this pressure means "Standard-High static pressure".

Wall Mounted Type



MODEL		FXAQ20ARVE6	FXAQ25ARVE6	FXAQ32ARVE6	FXAQ40ARVE6	FXAQ50ARVE6	FXAQ63ARVE6
Power supply		1-phase, 220 V/220 V, 50 Hz					
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200
	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300
	kW	2.5	3.2	4.0	5.0	6.3	8.0
Casing		White (N9.5)					
Airflow rate (H/L)	m ³ /min	7.5/4.5	9/5	11/5.5	13/9	15/12	19/14
	cfm	265/159	318/177	388/194	459/318	530/424	671/494
Sound level (H/L)		35/31		36/31	38/31	39/34	42/37
Dimensions (HxWxD)		298x929x258					
Machine weight		13.0					
Piping connections	Liquid (Flare)	ø 6.4				ø 9.5	
	Gas (Flare)	ø 12.7				ø 15.9	
	Drain	VP13 (External Dia, 18/Internal Dia, 13)					

VRV Indoor Units

Floor Standing Type/Concealed Floor Standing Type



FXLQ



FXNQ

MODEL	FXLQ32MAVE8		FXLQ50MAVE8		FXLQ63MAVE8	
	FXNQ32MAVE8		FXNQ50MAVE8		FXNQ63MAVE8	
Power supply	1-phase, 220-240 V/220 V, 50 Hz					
Cooling capacity	Btu/h	12,300	19,100	24,200		
	kW	3.6	5.6	7.1		
Heating capacity	Btu/h	13,600	21,500	27,300		
	kW	4.0	6.3	8.0		
Casing	FXLQ: Ivory white (5Y7.5/1)/FXNQ: Galvanised steel plate					
Airflow rate (H/L)	m ³ /min	8/6	14/11	16/12		
	cfm	282/212	494/388	565/424		
Sound level (H/L) 220V	dB(A)	35/32	39/34	40/35		
Dimensions (HxWxD)	FXLQ	600x1,140x222		600x1,420x222		
	FXNQ	610x1,070x220		610x1,350x220		
Machine weight	FXLQ	30.0		36.0		
	FXNQ	23.0		27.0		
Piping connections	Liquid (Flare)	ø 6.4		ø 9.5		
	Gas (Flare)	ø 12.7		ø 15.9		
	Drain	21O.D.				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: (FXAQ-P) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. (FXLQ-MA, FXNQ-MA) Anechoic chamber conversion value, measured at a point 1.5 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Floor Standing Duct Type



MODEL	FXVQ125NY1	FXVQ200NY1	FXVQ250NY1	FXVQ400NY1	FXVQ500NY16	
Power supply	3-phase 4-wire system, 380-415 V, 50 Hz					
Cooling capacity	Btu/h	47,800	76,400	95,500	1,54,000	1,91,000
	kW	14.0	22.4	28.0	45.0	56.0
Heating capacity	Btu/h	54,600	85,300	1,07,500	1,71,000	2,15,000
	kW	16.0	25.0	31.5	50.0	63.0
Casing colour	Ivory white (5Y7.5/1)					
Dimensions (HxWxD)	mm	1670x750x510	1670x950x510	1670x1170x510	1900x1170x720	1900x1470x720
Machine weight	kg	118	144	169	236	306
Airflow rate	m ³ /min	43	69	86	134	172
	cfm	1,518	2,436	3,036	4,730	6,072
External static Pressure*2	Pa	152	217	281	420	390
Drive system	Belt drive system					
Air Filter	Type	Long-life filter (anti-mould resin net)				
Sound level *1	dB(A)	52	56	60	65	66
Piping connections	Liquid (Flare)	9.5 (Brazing)			12.7 (Brazing)	15.9 (Brazing)
	Gas (Flare)	15.9 (Brazing)	19.1 (Brazing)	22.2 (Brazing)	28.6 (Brazing)	
	Drain	Rp1 (PS 1B internal thread)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- 1: Sound level : measured when the air discharge outlet duct (2 m) is attached (anechoic chamber conversion value). It increases by approximately 5 dB(A) when the plenum chamber is installed to deliver direct airflow.
- 2: The value is the external static pressure with standard pulley.

Clean Room Type Air Conditioner FXB(P)Q-P



Type	Integrated outlet unit model			Separate outlet unit model
MODEL	Indoor unit	FXBQ40PVE	FXBQ50PVE	FXBQ63PVE
	Outlet unit	BAF82A63		
Power supply	1-phase, 220-240 V/220 V, 50/60 Hz			
Cooling capacity	Btu/h	15,400	19,100	24,200
	kW	4.5	5.6	7.1
Power consumption	kW	0.31	0.31	0.45
Intake filter efficiency *1	70% by gravimetric method			
Outlet HEPA filter efficiency *2	99.97% by DOP method *5			
Indoor unit weight	kg	140 *3	185 *3	120 *6
Casing	Galvanised steel plate			
Airflow rate (H/L)	cfm	19.5/17.5	26/22.5	
	m ³ /min	688/618	918/794	
Dimensions (HxWxD)	mm	492x1,788x1,000	492x1,788x1,300	492x1,078x1,300
Outlet unit weight	kg	-		65 *3
Piping connections	Liquid (Flare)	ø6.4		ø9.5
	Gas (Flare)	ø12.7		ø15.9
	Drain	PT1B		
Filter(Optional)	HEPA filter	BAFH82A50		BAFH82A63
Panel (Option)	Ceiling intake type	BYB82A50C		BYB82A63C
	Floor-level intake type	BYB82A50W		BYB82A63WP

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)

*1: An intake air filter is only attached to the ceiling intake type.

*2: HEPA filter sold separately. The dust collection efficiency of HEPA filter is 99.97%. However, air may slightly leak around the filter when installing.

*3: Weight including HEPA filter and panel.

*4: Anechoic chamber conversion value under JIS B 8616 test conditions. Value usually increases slightly in practice due to surrounding conditions.

*5: The clean room air conditioner does not support DOP testing (leak test) based on GMP standards (Standards for Manufacturing Control and Quality Control for Medical Devices) due to slight leakage at time of product installation.

*6: Weight including panel.

*In the case of an installation in an operating theatre etc. where an air conditioner malfunction may have serious consequences, please build in redundancy with two or more outdoor units.

Outdoor Units

VRV X (Cooling Only)

							
MODEL		RXQ6ARY6	RXQ8ARY6	RXQ10ARY6	RXQ12ARY6	RXQ14ARY6	RXQ16ARY6
Combination units		—	—	—	—	—	—
Power supply		3-phase, 380~415 V, 50 Hz					
Cooling capacity	Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000
	kW	16.0	22.4	28.0	33.5	40.0	45.0
Capacity control	%	25~100	20~100	13~100	12~100	11~100	10~100
Casing colour		Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	1	1	1	1	1	2
Airflow rate	m ³ /min	119	178		191	257	
Dimensions (HxWxD)	mm	1,657X930X765				1,657X1,240X765	
Machine weight	kg	165		175		220	260
Sound level	dB(A)	56	56	57	59	60	60
Operation range	Cooling °CDB	10 ~ 49					
Refrigerant	Type	R410A					
	Charge kg	5.9		6.7	6.8	7.4	8.2
Piping connections	Liquid mm	ø 9.5				ø 12.7	
	Gas mm	ø 19.1		ø 22.2		ø 28.6	

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

					
MODEL		RXQ18ARY6	RXQ20ARY6	RXQ22ARY6	RXQ24ARY6
Combination units		—	—	RXQ10ARY6	RXQ12ARY6
		—	—	RXQ12ARY6	RXQ12ARY6
		—	—	—	—
Power supply		3-phase, 380~415 V, 50 Hz			
Cooling capacity	Btu/h	1,71,000	1,91,000	2,10,000	2,29,000
	kW	50.0	56.0	61.5	67.0
Capacity control	%	10~100	7~100	6~100	
Casing colour		Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type			
	No. of compressor	2	2	1+1	1+1
Airflow rate	m ³ /min	257	297	178+191	191+191
Dimensions (HxWxD)	mm	1,657X1,240X765		(1,657X930X765)+(1,657X930X765)	
Machine weight	kg	260	285	175+175	
Sound level	dB(A)	61	65	61	62
Operation range	Cooling °CDB	10 ~ 49			
Refrigerant	Type	R410A			
	Charge kg	8.4	11.8	6.7+6.8	6.8+6.8
Piping connections	Liquid mm	ø 15.9			
	Gas mm	ø 28.6			ø 34.9

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

MODEL		RXQ26ARY6	RXQ28ARY6	RXQ30ARY6	RXQ32ARY6	RXQ34ARY6	RXQ36ARY6
Combination units		RXQ12ARY6	RXQ12ARY6	RXQ12ARY6	RXQ14ARY6	RXQ16ARY6	RXQ18ARY6
		RXQ14ARY6	RXQ16ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6
		—	—	—	—	—	—
Power supply		3-phase, 380-415 V, 50 Hz					
Cooling capacity	Btu/h	2,47,000	2,68,000	2,85,000	3,05,000	3,24,000	3,41,000
	kW	73.5	78.5	83.5	90	95.0	100
Capacity control	%	6~100	5~100	5~100	5~100	4~100	5~100
Casing colour		Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	1+1	1+2	1+2	1+2	2+2	2+2
Airflow rate	m ³ /min	191+257	191+257	191+257	257+257	257+257	257+257
Dimensions (HxWxD)	mm	(1,657X930X765)+(1,657X1,240X765)			(1,657X1,240X765)+(1,657X1,240X765)		
Machine weight	kg	175+220	175+260		220+260	260+260	
Sound level	dB(A)	63			64		
Operation range	Cooling °CDB	10 ~ 49					
Refrigerant	Type	R410A					
	Charge kg	6.8+7.4	6.8+8.2	6.8+8.4	7.4+8.4	8.2+8.4	8.4+8.4
Piping connections	Liquid mm	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1
	Gas mm	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 41.3

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

MODEL		RXQ38ARY6	RXQ40ARY6	RXQ42ARY6	RXQ44ARY6	RXQ46ARY6	RXQ48ARY6	RXQ50ARY6
Combination units		RXQ18ARY6	RXQ20ARY6	RXQ12ARY6	RXQ12ARY6	RXQ14ARY6	RXQ14ARY6	RXQ14ARY6
		RXQ20ARY6	RXQ20ARY6	RXQ12ARY6	RXQ12ARY6	RXQ14ARY6	RXQ16ARY6	RXQ18ARY6
		—	—	RXQ18ARY6	RXQ20ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6
Power supply		3-phase, 380-415 V, 50 Hz						
Cooling capacity	Btu/h	3,62,000	3,82,000	3,99,000	4,20,000	4,40,000	4,57,000	4,78,000
	kW	106	112	117	123	129	134	140
Capacity control	%	4~100		3~100		4~100		3~100
Casing colour		Ivory white (5Y7.5/1)						
Compressor	Type	Hermetically Sealed Scroll Type						
	No. of compressor	2+2		1+1+2				1+2+2
Airflow rate	m ³ /min	257+297	297+297	191+191+257	191+191+297	257+257+257		
Dimensions (HxWxD)	mm	(1,657X1,240X765)+(1,657X1,240X765)		(1,657X930X765)+(1,657X930X765)+(1,657X1,240X765)		(1,657X1,240X765)+(1,657X1,240X765)+(1,657X1,240X765)		
Machine weight	kg	260+285	285+285	175+175+260	175+175+285	220+220+260	220+260+260	220+260+260
Sound level	dB(A)	66	68	65	67	65		
Operation range	Cooling °CDB	10 ~ 49						
Refrigerant	Type	R410A						
	Charge kg	8.4+11.8	11.8+11.8	6.8+6.8+8.4	6.8+6.8+11.8	7.4+7.4+11.8	7.4+8.2+8.4	7.4+8.4+8.4
Piping connections	Liquid mm	ø 19.1						
	Gas mm	ø 41.3						

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

							
MODEL		RXQ52ARY6	RXQ54ARY6	RXQ56ARY6	RXQ58ARY6	RXQ60ARY6	
Combination units		RXQ16ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ20ARY6	
		RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ20ARY6	RXQ20ARY6	
		RXQ18ARY6	RXQ18ARY6	RXQ20ARY6	RXQ20ARY6	RXQ20ARY6	
Power supply		3-phase, 380-415 V, 50 Hz					
Cooling capacity	Btu/h	4,95,000	5,12,000	5,32,000	5,53,000	5,73,000	
	kW	145	150	156	162	168	
Capacity control	%	3~100				2~100	
Casing colour		Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	2+2+2					
Airflow rate		m ³ /min	257+257+257		257+297+297		
Dimensions (HxWxD)		mm	(1,657X1,240X765 + 1,657X1,240X765 + 1,657X1,240X765)				
Machine weight		kg	260+260+260	260+260+285	260+285+285	285+285+285	
Sound level		dB(A)	65	66	68	69	70
Operation range	Cooling	°CDB	10 ~ 49				
	Refrigerant	Type	R410A				
Refrigerant	Charge	kg	8.2+8.4+8.4	8.4+8.4+8.4	8.4+8.4+11.8	8.4+11.8+11.8	11.8+11.8+11.8
	Piping connections	Liquid	mm	ø 19.1			
Gas		mm	ø 41.3				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

 							
MODEL		RXYQ6ARY6	RXYQ8ARY6	RXYQ10ARY6	RXYQ12ARY6	RXYQ14ARY6	RXYQ16ARY6
Combination units		—	—	—	—	—	—
Power supply		3-phase, 380-415 V, 50 Hz					
Cooling capacity	Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000
	kW	16.0	22.4	28.0	33.5	40.0	45.0
Heating capacity	Btu/h	61,400	85,300	1,07,000	1,28,000	1,54,000	1,71,000
	kW	18.0	25.0	31.5	37.5	45.0	50.0
Capacity control	%	25-100	20-100	13-100	12-100	11-100	10-100
Casing colour		Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	1			2		
Airflow rate		m ³ /min	119	178	191	257	
Dimensions (HxWxD)		mm	1,657X930X765			1,657X1,240X765	
Machine weight		kg	180	195	265		
Sound level		dB(A)	56	57	60		
Operation range	Cooling	°CDB	-5 ~ 49				
	Heating	°CDB	-20 ~ 15.5				
Refrigerant	Type	R410A					
	Charge	kg	6.9	7.0	7.4	7.6	9.1
Piping connections	Liquid	mm	ø 9.5		ø 12.7		
	Gas	mm	ø 19.1		ø 22.2	ø 28.6	

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
 - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5m, Level difference: 0m.
 - Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

					
MODEL		RXYQ18ARY6	RXYQ20ARY6	RXYQ22ARY6	RXYQ24ARY6
Combination units		—	—	RXYQ10ARY6	RXYQ12ARY6
		—	—	RXYQ12ARY6	RXYQ12ARY6
		—	—	—	—
Power supply		3-phase, 380-415 V, 50 Hz			
Cooling capacity	Btu/h	1,71,000	1,91,000	2,10,000	2,29,000
	kW	50.0	56.0	61.5	67.0
Heating capacity	Btu/h	1,91,000	2,15,000	2,35,000	2,56,000
	kW	56.0	63.0	69.0	75.0
Capacity control	%	10-100	7-100	6-100	
Casing colour		Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type			
	No. of compressor	2		1+1	
Airflow rate	m ³ /min	257	297	178+191	191+191
Dimensions (HxWxD)	mm	1,657X1,240X765		(1,657X930X765)+(1,657X930X765)	
Machine weight	kg	285	305	195+195	
Sound level	dB(A)	61	65	61	62
Operation range	Cooling	°CDB -5 ~ 49			
	Heating	°CDB -20 ~ 15.5			
Refrigerant	Type	R410A			
	Charge	kg	11.8	7.4+7.6	7.6+7.6
Piping connections	Liquid	mm \varnothing 15.9			
	Gas	mm \varnothing 28.6		mm \varnothing 34.9	

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

							
MODEL		RXYQ26ARY6	RXYQ28ARY6	RXYQ30ARY6	RXYQ32ARY6	RXYQ34ARY6	RXYQ36ARY6
Combination units		RXYQ12ARY6	RXYQ12ARY6	RXYQ12ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6
		RXYQ14ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ20ARY6
		—	—	—	—	—	—
Power supply		3-phase, 380-415 V, 50 Hz					
Cooling capacity	Btu/h	2,47,000	2,68,000	2,85,000	3,05,000	3,24,000	3,45,000
	kW	73.5	78.5	83.5	90.0	95.0	101.0
Heating capacity	Btu/h	—	2,99,000	3,19,000	3,41,000	3,62,000	3,86,000
	kW	82.5	87.5	93.5	100.0	106.0	113.0
Capacity control	%	5-100					4-100
Casing colour		Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	1+2			2+2		
Airflow rate	m ³ /min	191+257		257+257		257+297	
Dimensions (HxWxD)	mm	(1,657X930X765)+(1,657X1,240X765)			(1,657X1,240X765)+(1,657X1,240X765)		
Machine weight	kg	195+265		195+285	265+265	265+285	265+305
Sound level	dB(A)	63				64	66
Operation range	Cooling	°CDB -5 ~ 49					
	Heating	°CDB -20 ~ 15.5					
Refrigerant	Type	R410A					
	Charge	kg	7.6+9.1	7.6+9.3	7.6+11.8	9.3+9.3	9.3+11.8
Piping connections	Liquid	mm \varnothing 19.1					
	Gas	mm \varnothing 34.9				mm \varnothing 41.3	

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

MODEL		RXYQ38ARY6	RXYQ40ARY6	RXYQ42ARY6	RXYQ44ARY6
Combination units		RXYQ18ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6
		RXYQ20ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6
		—	—	RXYQ18ARY6	RXYQ20ARY6
Power supply		3-phase, 380-415 V, 50 Hz			
Cooling capacity	Btu/h	3,62,000	3,82,000	3,99,000	4,20,000
	kW	106.0	112.0	117.0	123.0
Heating capacity	Btu/h	4,06,000	4,30,000	4,47,000	4,71,000
	kW	119.0	126.0	131.0	138.0
Capacity control	%	4 - 100	3 - 100	4 - 100	3 - 100
Casing colour		Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type			
	No. of compressor	2+2		1+1+2	
Airflow rate	m ³ /min	257+297	297+297	191+191+257	191+191+297
Dimensions (HxWxD)	mm	(1,657X1,240X765)+ (1,657X1,240X765)		(1,657X930X765)+ (1,657X930X765)+ (1,657X1,240X765)	
Machine weight	kg	285+305	305+305	195+195+285	200+200+325
Sound level	dB(A)	66	68	65	67
Operation range	Cooling	°CDB -5 ~ 49			
	Heating	°CDB -20 ~ 15.5			
Refrigerant	Type	R410A			
	Charge	kg 11.8+11.8		7.6+7.6+11.8	
Piping connections	Liquid	mm Ø 19.1			
	Gas	mm Ø 41.3			

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

RXYQ46ARY6	RXYQ48ARY6	RXYQ50ARY6	RXYQ52ARY6	RXYQ54ARY6	RXYQ56ARY6	RXYQ58ARY6	RXYQ60ARY6	
RXYQ14ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6	
RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6	RXYQ20ARY6	
RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6	RXYQ20ARY6	RXYQ20ARY6	
Power supply		3-phase, 380-415 V, 50 Hz						
Cooling capacity	Btu/h	4,44,000	4,61,000	4,78,000	4,95,000	5,12,000	5,32,000	
	kW	130.0	135.0	140.0	145.0	150.0	156.0	
Heating capacity	Btu/h	4,95,000	5,12,000	5,32,000	5,53,000	5,73,000	5,97,000	
	kW	145.0	150.0	156.0	162.0	168.0	175.0	
Capacity control	%	3 - 100			2 - 100			
Casing colour		Ivory white (5Y7.5/1)						
Compressor	Type	Hermetically Sealed Scroll Type						
	No. of compressor	2+2+2						
Airflow rate	m ³ /min	257+257+257	257+257+297	257+257+257	257+257+297	257+297+297	297+297+297	
Dimensions (HxWxD)	mm	(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)		(1,657X1,240X765 + 1,657X1,240X765 + 1,657X1,240X765)				
Machine weight	kg	195+195+305	265+265+265	265+265+285	265+285+285	285+285+305	285+305+305	
Sound level	dB(A)	65		66	68	69	70	
Operation range	Cooling	°CDB -5 ~ 49						
	Heating	°CDB -20 ~ 15.5						
Refrigerant	Type	R410A						
	Charge	kg 9.1+9.3+9.3		9.3+9.3+11.8		9.3+11.8+11.8		
Piping connections	Liquid	mm Ø 19.1						
	Gas	mm Ø 41.3						

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



OUTDOOR UNIT COMBINATIONS & OPTION LIST

VRV X

HP	Capacity index	Model name	Combination for cooling only	Combination for heat pump	Outdoor unit multi connection piping kit *1	Total capacity index of connectable indoor units*2	Maximum number of connectable indoor units*2
6	150	RX(Y)Q6A	RXQ6A	RXYQ6A	—	75 to 195 (300)	9 (15)
8	200	RX(Y)Q8A	RXQ8A	RXYQ8A	—	100 to 260 (400)	13 (20)
10	250	RX(Y)Q10A	RXQ10A	RXYQ10A	—	125 to 325 (500)	16 (25)
12	300	RX(Y)Q12A	RXQ12A	RXYQ12A	—	150 to 390 (600)	19 (30)
14	350	RX(Y)Q14A	RXQ14A	RXYQ14A	—	175 to 455 (700)	22 (35)
16	400	RX(Y)Q16A	RXQ16A	RXYQ16A	—	200 to 520 (800)	26 (40)
18	450	RX(Y)Q18A	RXQ18A	RXYQ18A	—	225 to 585 (900)	29 (45)
20	500	RX(Y)Q20A	RXQ20A	RXYQ20A	—	250 to 650 (1,000)	32 (50)
22	550	RX(Y)Q22A	RXQ10A + RXQ12A	RXYQ10A + RXYQ12A	BHFP22P1006	275 to 715 (880)	35 (44)
24	600	RX(Y)Q24A	RXQ12A x 2	RXYQ12A x 2		300 to 780 (960)	39 (48)
26	650	RX(Y)Q26A	RXQ12A + RXQ14A	RXYQ12A + RXYQ14A		325 to 845 (1,040)	42 (52)
28	700	RX(Y)Q28A	RXQ12A + RXQ16A	RXYQ12A + RXYQ16A		350 to 910 (1,120)	45 (56)
30	750	RX(Y)Q30A	RXQ12A + RXQ18A	RXYQ12A + RXYQ18A		375 to 975 (1,200)	48 (60)
32	800	RX(Y)Q32A	RXQ14A + RXQ18A	RXYQ16A + RXYQ18A		400 to 1,040 (1,280)	52 (64)
34	850	RX(Y)Q34A	RXQ16A + RXQ18A	RXYQ16A + RXYQ18A		425 to 1,105 (1,360)	55 (64)
36	900	RX(Y)Q36A	RXQ18A x 2	RXYQ16A + RXYQ20A		450 to 1,170 (1,440)	58 (64)
38	950	RX(Y)Q38A	RXQ18A + RXQ20A	RXYQ18A + RXYQ20A		475 to 1,235 (1,520)	61 (64)
40	1,000	RX(Y)Q40A	RXQ20A x 2	RXYQ20A x 2		500 to 1,300 (1,600)	64 (64)
42	1,050	RX(Y)Q42A	RXQ12A x 2 + RXQ18A	RXYQ12A x 2 + RXYQ18A		525 to 1,365 (1,365)	
44	1,100	RX(Y)Q44A	RXQ12A x 2 + RXQ20A	RXYQ12A x 2 + RXYQ20A		550 to 1,430 (1,430)	
46	1,150	RX(Y)Q46A	RXQ14A + RXQ14A + RXQ18A	RXYQ14A + RXYQ16A + RXYQ18A		575 to 1,495 (1,495)	
48	1,200	RX(Y)Q48A	RXQ14A + RXQ16A + RXQ18A	RXYQ16A x 3		600 to 1,560 (1,560)	
50	1,250	RX(Y)Q50A	RXQ14A + RXQ18A + RXQ18A	RXYQ16A + RXYQ16A + RXYQ18A	625 to 1,625 (1,625)		
52	1,300	RX(Y)Q52A	RXQ16A + RXQ18A x 2	RXYQ16A + RXYQ18A x 2	650 to 1,690 (1,690)		
54	1,350	RX(Y)Q54A	RXQ18A x 3	RXYQ18A x 3	675 to 1,755 (1,755)		
56	1,400	RX(Y)Q56A	RXQ18A x 2 + RXQ20A	RXYQ18A x 2 + RXYQ20A	700 to 1,820 (1,820)		
58	1,450	RX(Y)Q58A	RXQ18A + RXQ20A x 2	RXYQ18A + RXYQ20A x 2	725 to 1,885 (1,885)		
60	1,500	RX(Y)Q60A	RXQ20A x 3	RXYQ20A x 3	750 to 1,950 (1,950)		

Note: *1 For multiple connection of 22 HP systems and above, the outdoor unit multi connection piping kit (separately sold) is required.
 *2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 17 for notes on connection capacity of indoor units.

VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow With Sensing (Optional)

No.	Item		Type	FXFSQ25A FXFSQ32A FXFSQ40A	FXFSQ50A FXFSQ63A FXFSQ80A	FXFSQ100A FXFSQ125A FXFSQ140A
1	Decoration panel	Standard panel	Fresh white	BYCQ125EAF6 *		
			Black	BYCQ125EAK *		
		Designer panel ¹	Fresh white	BYCQ125EAPF *		
		Auto grille panel ^{2,3}	Fresh white	BYCQ125EASF *		
		Sensing panel	Fresh white	BYCQ140EEF6 *		
Black	BYCQ125EEK *					
2	Sealing material of air discharge outlet ⁴	For usage of 3-4-way flow	KDBH551C160			
		For usage of 2-way flow	KDBH552C160			
3	Panel spacer		KDBP55H160FA			
4	Fresh air intake kit	Chamber type ^{5,6}	Without T-duct joint	KDDP55B160 (Components: KDDP55C160-1, KDDP55B160-2) ⁸		
			With T-duct joint	KDDP55B160K (Components: KDDP55C160-1, KDDP55B160K2) ⁸		
		Direct installation type ⁷	KDDP55X160A			
5	High-efficiency filter unit ⁹ (Including filter chamber)		(Colorimetric method 65%)	KAFP556C80	KAFP556C160	
			(Colorimetric method 90%)	KAFP557C80	KAFP557C160	
6	Replacement high-efficiency filter ^{9,10}		(Colorimetric method 65%)	KAFP552B80	KAFP552B160	
			(Colorimetric method 90%)	KAFP553B80	KAFP553B160	
7	Filter chamber		KDDFP55C160			
8	Replacement long-life filter		KAFP551K160			
9	Replacement long-life filter (Auto grille panel)		KAFP551H160			
10	Ultra long-life filter unit (Including filter chamber) ⁹		KAFP55C160			
11	Replacement ultra long-life filter ^{9,10}		KAFP55H160H			
12	Branch duct chamber ⁴		KDJP55C80	KDJP55C160		
13	Insulation kit for high humidity ^{9,11}		KDTP55K80	KDTP55K160		

- Note:
- When installing designer panel, body height (ceiling required dimension) is 42 mm higher than standard panel. Designer panel cannot operate 2 and 3 way flow.
 - A dedicated wireless remote controller (BRC16A2) for the auto grille panel is included for lowering and raising the suction grille.
 - When installing auto grille panel, body height (ceiling required dimension) is 55 mm higher than standard panel.
 - Circulation airflow is not available with this option.
 - When installing a fresh air intake kit (chamber type), two air outlet corners are closed.
 - It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating sound and may also influence temperature sensing.
 - The volume of fresh air for direct installation type is approximately 1% of the indoor unit airflow. The chamber type is recommended when more fresh air is necessary.
 - Please order using the names of both components instead of set name.
 - This option cannot be installed to designer panel and auto grille panel.
 - Filter chamber is required.
 - Please use in case temperature/humidity inside ceiling may get over 30°C, 80% RH.
 - These panels do not contain the sensing function.

VRV Indoor Units

Ceiling Mounted Cassette (Compact Multi Flow) Type

No.	Item	Type	FXZQ20M	FXZQ25M	FXZQ32M	FXZQ40M	FXZQ50M
1	Decoration panel		BYFQ60B3W1				
2	Sealing material of air discharge outlet		KDBH44BA60				
3	Panel spacer		KDBQ44BA60A				
4	Replacement long-life filter		KAFQ441BA60				
5	Fresh air intake kit	Direct installation type	KDDQ44XA60				

Ceiling Mounted Cassette (Double Flow) Type

No.	Item	Type	FXCQ25A	FXCQ32A FXCQ40A	FXCQ50A	FXCQ63A	FXCQ80A	FXCQ125A
1	Decoration panel		BYBCQ40CF		BYBCQ63CF		BYBCQ125CF	
2	Filter related	High efficiency filter* ¹	65%	KAFP532B50	KAFP532B80		KAFP532B160	
			90%	KAFP533B50	KAFP533B80		KAFP533B160	
		Filter chamber bottom suction		KDDFP53B50	KDDFP53B80		KDDFP53B160	
	Long-life replacement filter		KAFP531B50		KAFP531B80		KAFP531B160	
3	Remote controller	Wireless	H/P		BRC7M65			
4	Navigation remote controller (Wired remote controller)		BRC1E63					

Note: * 1 Filter chamber is required if installing high efficiency filter.

Ceiling Mounted Cassette Corner Type

No.	Item	Type	FXEQ20AV36	FXEQ25AV36	FXEQ32AV36	FXEQ40AV36	FXEQ50AV36	FXEQ63AV36	
1	Decoration Panel		BYEP40AW16				BYEP63AW16		

Slim Ceiling Mounted Duct Type (700 mm width type)

No.	Item	Type	FXDQ20PD	FXDQ25PD	FXDQ32PD
1	Insulation kit for high humidity		KDT25N32		

Slim Ceiling Mounted Duct Type (900/1,100 mm width type)

No.	Item	Type	FXDQ40ND	FXDQ50ND	FXDQ63ND
1	Insulation kit for high humidity		KDT25N50		KDT25N63

High Static Ceiling Mounted Duct Type

No.	Item	Type	FXMQ20P FXMQ25P FXMQ32P	FXMQ40PBV36	FXMQ50PBV36 FXMQ63PBV36 FXMQ80PBV36	FXMQ100PBV36 FXMQ125PBV36 FXMQ140PBV36
1	Drain pump kit		-			
2	High efficiency filter	65%	KAF372AA36	KAF372AA56	KAF372AA80	KAF372AA160
		90%	-	KAF373AA56	KAF373AA80	KAF373AA160
3	Filter chamber		-	BDDF37A40-6	BDDF37A80-6	BDDF37A140-6
4	Long-life replacement filter		-	KAF371AA56	KAF371AA80	KAF371AA160
5	Long-life filter chamber kit		-	KAF375AA56	KAF375AA80	KAF375AA160
6	Service panel	White	KTBJ25K36W	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W
		Fresh white	KTBJ25K36F	KTBJ25K56F	KTBJ25K80F	KTBJ25K160F
		Brown	KTBJ25K36T	KTBJ25K56T	KTBJ25K80T	KTBJ25K160T
7	Air discharge adaptor		KDAJ25K36A	KDAJ25K56A	KDAJ25K71A	KDAJ25K140A
8	Suction Flange		KDF37AA36	BDF37A40-6	BDF37A80-6	BDF37A140-6

VRV Indoor Units

Ceiling Suspended Type

No.	Item	Type	FXHQ32MA	FXHQ63MA	FXHQ100MA
1	Drain pump kit		KDU50N60VE	KDU50N125VE	
2	Replacement long-life filter (Resin net)		KAF501DA56	KAF501DA80	KAF501DA112
3	L-type piping kit (for upward direction)		KHFP5MA63	KHFP5MA160	

Floor Standing Type/Concealed Floor Standing Type

No.	Item	Type	FXLQ32MA/FXNQ32MA	FXLQ50MA/FXNQ50MA	FXLQ63MA/FXNQ63MA
1	Long-life replacement filter		KAFJ361K45	KAFJ361K71	

Mid Static Ceiling Mounted Duct Type

No.	Item	Type	Duct Type			
			FXMQ40ARV16, FXMQ50ARV16	FXMQ63ARV16, FXMQ80ARV16, FXMQ100ARV16		
1	High Efficiency Filter	65% Type	KAF372AA56	KAF372AA80		
2	Filter Chamber	Type	BDDF37A40~6	BDDF37A80~6		
3	Long-Life Replacement Filter	Type	KAF371AA56	KAF371AA80		
4	Suction Flange		BDF37A40~6	BDF37A80~6		
5	Service Panel		KTBJ25K56W	KTBJ25K80W		
			KTBJ25K56F	KTBJ25K80F		
6	Air Discharge Adapter		KTBJ25K56T	KTBJ25K80T		
			KDAJ25K56A	KDAJ25K71A		

Floor Standing Duct Type

No.	Item	Type	FXVQ125N	FXVQ200N	FXVQ250N	FXVQ400N	FXVQ500N
1	Replacement long life filter		KAFJ261M140	KAFJ261M224	KAFJ261M280	KAFJ261N450	KAFJ261N560
2	Ultra long-life filter		-				
3	Filter chamber for high efficiency filter *1	65%	KDDF-92A140	KDDF-92A200	KDDF-92A280	KDDF-92A400	KDDF-92A560
4		90%	KDDF-93A140	KDDF-93A200	KDDF-93A280	KDDF-93A400	KDDF-93A560
5	Front suction filter chamber for High efficiency filter	Front suction base flange	KD-9A140	KD-9A200	KD-9A280	KD-9A400	KD-9A560
6		Suction grille	KDGF-9A140	KDGF-9A200	KDGF-9A280	KDGF-9A400	KDGF-9A560
7	Replacement filter *2	Long-life filter *3	KAF-91B140	KAF-91B200	KAF-91B280	KAF-91B400	KAF-91B560
8		High efficiency filter	KAF-92B140	KAF-92B200	KAF-92B280	KAF-92B400	KAF-92B560
9	Plenum chamber *4		KAF-93B140	KAF-93B200	KAF-93B280	KAF-93B400	KAF-93B560
10			KPCJ140A	KPC5J	KPC8J	KPCJ400A	KPC15JA
11	Pulley for plenum chamber *4		KPP8JA	KPP9JA	KPP10JA	-	
12	Fresh air intake kit		KD106D10		KDFJ906A560		
13	Rear suction kit		KDFJ905A140	KDFJ905A200	KDFJ905A280	KDFJ905A400	KDFJ905A560
14	Discharge grille for plenum side		KD101A10		KD101A20		
15	Wood base		KKWJ9A140	KWF1G5P	KWF1G8P	KKWJ9A400	KWF1G15
16	Vibration isolating frame		K-ABSG1406A	K-ABSG1407A	K-ABSG1408A	K-ABSG1409A	K-ABSG1410A

*1 A front suction base flange and suction grille are required (option). *2 A filter chamber for high efficiency is required (option).
 *3 Different from the filter attached as standard. *4 Use the plenum chamber and pulley for plenum chamber in combination.

Clean Room Air Conditioner

No.	Item	Type	FXBQ40PVE	FXBQ50PVE	FXBQ63PVE	FXBPQ63PVE
1	Outlet unit		-			BAF82A63
2	Filter	HEPA filter	BAFH82A50		BAFH82A63	
3	Panel	Ceiling intake type	BYB82A50C		BYB82A63C	BYB82A63CP
4		Floor-level intake type	BYB82A50W		BYB82A63W	BYB82A63WP
5	Outside air intake duct flange		KDFJ82A80			

Outdoor Units

VRV X

Optional Accessories		RX(Y)Q6ARY6 RX(Y)Q8ARY6 RX(Y)Q10ARY6	RX(Y)Q12ARY6	RX(Y)Q14ARY6 RX(Y)Q16ARY6
Distributive piping	REFNET header	KHRP26M22H, (Max. 4 branch) KHRP26M33H (Max. 8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T KHRP26A33T	KHRP26A22T, KHRP26A33T, KHRP26A72T	


Optional Accessories		RX(Y)Q18ARY6 RX(Y)Q20ARY6
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max.4 branch) (Max.8 branch) (Max.8 branch)
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T

Optional Accessories		RX(Y)Q22ARY6	RX(Y)Q24ARY6	RX(Y)Q26ARY6 RX(Y)Q28ARY6 RX(Y)Q30ARY6 RX(Y)Q32ARY6	RX(Y)Q34ARY6 RX(Y)Q36ARY6 RX(Y)Q38ARY6 RX(Y)Q40ARY6
Distributive piping	REFNET header	KHRP26M22H (Max.4 branch), KHRP26M33H (Max.8 branch), KHRP26M72H (Max.8 branch),	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max.4 branch) (Max.8 branch) (Max.8 branch) (Max.8 branch)		
	REFNET joint	KHRP26A22T, KHRP26M33T, KHRP26M72T,	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T		
Pipe size reducer		KHRP26M73TP, KHRP26M73HP			
Outdoor unit connection piping kit		BHFP22P1006			

Optional Accessories		RX(Y)Q42ARY6 RX(Y)Q44ARY6	RX(Y)Q46ARY6 RX(Y)Q48ARY6 RX(Y)Q50ARY6 RX(Y)Q52ARY6 RX(Y)Q54ARY6 RX(Y)Q56ARY6 RX(Y)Q58ARY6 RX(Y)Q60ARY6
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max.4 branch) (Max.8 branch) (Max.8 branch) (Max.8 branch)	
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T	
Pipe size reducer		KHRP26M73TP, KHRP26M73HP	
Outdoor unit connection piping kit		BHFP22P1516	



CONTROL SYSTEMS

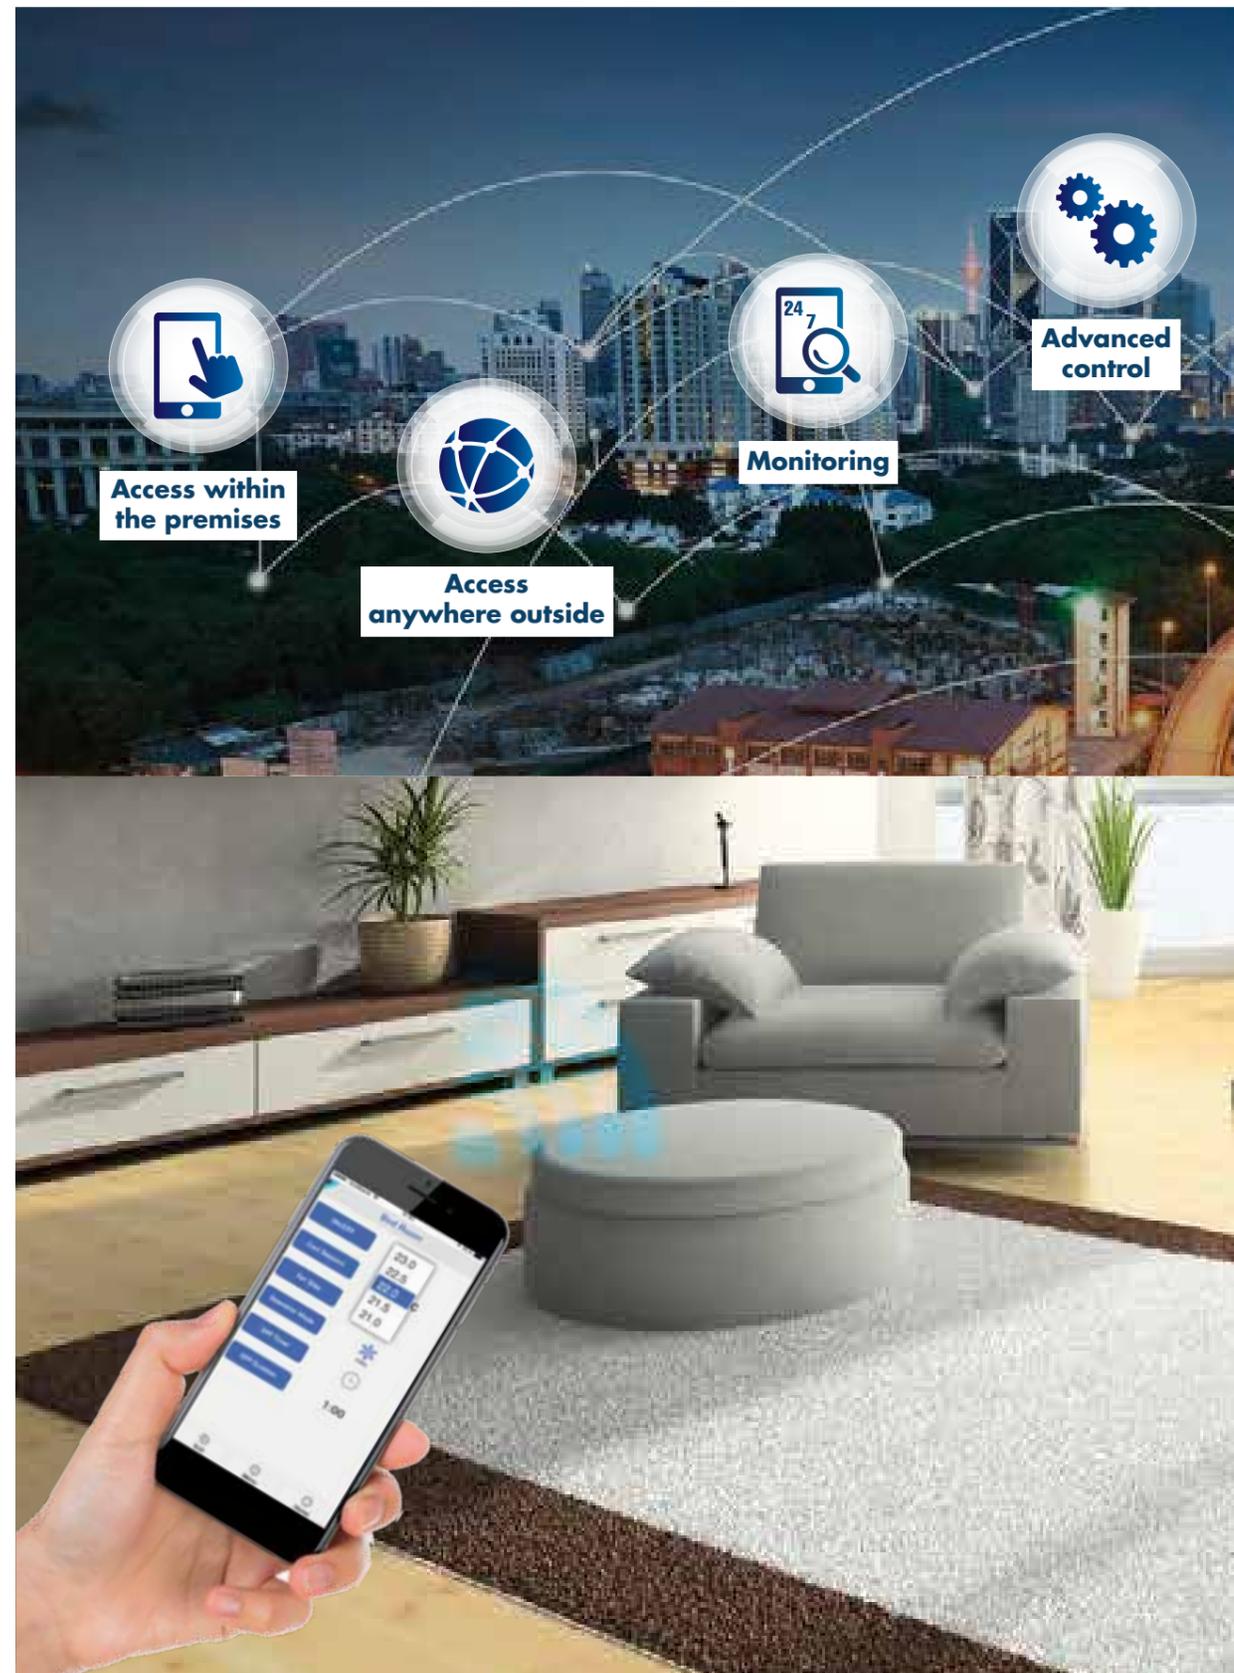



Access within the premises

Daikin Smart Control SVM Series provides the ability of centralised control for Daikin VRV air conditioners throughout the home with a smartphone. Homeowners can control all of the core control functions in Daikin air conditioning system effortlessly from one room to another.



Access anywhere outside

With Daikin Smart Control SVM Series, the home temperature can be controlled from anywhere, and homeowners can always return from work or vacation to a comfortable cooling home. This also takes the pressure off homeowners on forgetting to switch off the air conditioners when away.



Advanced control

Daikin Smart Control SVM Series communicates with all of Daikin VRV air conditioners, allowing homeowners to access the core control functions on a smartphone, including temperature set points, operation mode, fan speed, airflow direction and error notification.



Monitoring

Homeowners can enjoy the peace of mind and convenience of monitoring air conditioners with Daikin Smart Control SVM Series from a smartphone.

VRV Control Systems and Solutions for Office Buildings



For More information 'Scan Me'

VRV Control Systems and Solutions for the Hospitality Industry



For More information 'Scan Me'

For medium size apartments, condominiums and landed properties

- Connect up to 16 (32*) Indoor Units
- Control and monitor VRV system from smartphone

*Additional modbus adaptor (DTA116A51) is required

Daikin D'Smart - For Google Play store users



For More information 'Scan Me'

Daikin D'Smart - For Apple App store users



For More information 'Scan Me'



System Architecture

- SVM
- VRV Systems
- DTA116A51 (Modbus Card)
- Router
- Smartphone

DAIKIN Supplied Equipments

Model	Items
SVM	Application Controller
DTA116A51	MODBUS Adaptor

Note: wi-fi connection should be in customer scope

Category	Function	Detail
Access security	User login	User name, password
	Device registration	Registered device (Smartphone only) can be accessed through the internet
Main screen	Status monitoring	On/Off, Set point, Operation mode, Fan step, Flap, Error code
	Manual operation	On/Off, Set point, Operation Mode, Fan step, Flap
Automatic control	Off timer	One time off timer on/off
System setting	Language	English
	Password setting	Available
	User administration	Add/Modify/Delete user, Set User name, Password, Accessible points

Individual Control Systems for VRV Indoor Units

Navigation remote controller (Wired remote controller) (Optional)




BRC1E63 & BRC1F61 (Only for FXEQ Series)

Clear display

- **Dot matrix display**

A combination of fine dots enables various icons. Large text display is easy to see.

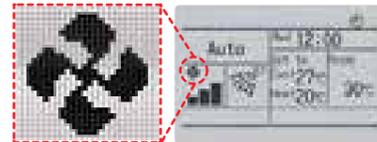

- **Backlight display**

Backlight display helps operating in dark rooms.

Simple operation

- **Large buttons and arrow keys**

Large buttons and arrow keys enable easy operation. Basic setting such as fan speed and temperature can be intuitively operated. For other settings, just select the function from the menu list.



- **Guide on display**

The display gives an explanation of each setting for easy operation.

Energy saving

- **Set point range set**

- Saves energy by limiting the min. and max. set temperature.
- Avoids excessive cooling or heating.
- This function is convenient when the remote controller is installed at a place where a number of people may operate it.



- **Set point auto-reset**


- Even if the set temperature is changed, it returns to the preset temperature after a preset period of time.
- Period selectable from 30 min/60 min/90 min/120 min.



- **Off timer**

- Turns off the air conditioner after a preset period of time.
- Period can be preset from 30 to 180 minutes in 10-minute increments.

Restaurant sample

<p>Restaurant opened</p> <p>Temperature is set to 27°C</p> 	<p>Full tables at lunchtime</p> <p>Then is lowered to 24°C for crowded room</p> 	<p>After 30 minutes*</p> <p>Automatically returns to preset temperature (27°C)</p> 
---	---	---

*Setting possible for after 30, 60, 90, and 120 minutes.

Individual Control Systems for VRV Indoor Units

Convenience

- **Setback (default:OFF)**

Maintains the room temperature in a specific range during an unoccupied period by temporarily starting air conditioner that was turned OFF.

	Setback temperature	Recovery differential
Cooling	33—37 C	-2 — -8 C




Ex) Setback temperature Cooling : 35°C Recovery differential Cooling : -2°C
When the room temperature goes above 35°C, the air conditioner starts operating in Cooling automatically. When room temperature reaches 33°C, the air conditioner turns OFF.

- **Weekly schedule**

- Five actions per day can be scheduled for each day of the week.
- The holiday function will disable schedule timer for the days that have been set as holiday.
- Three independent schedules can be set. (e.g. summer, winter, mid-season)




College classroom sample (a summer Monday case)
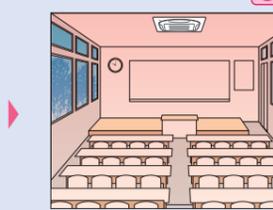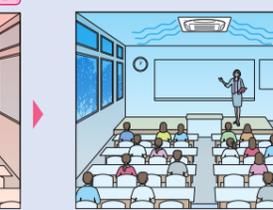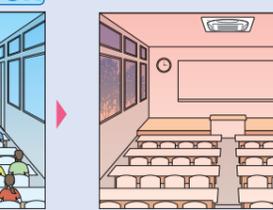
<p>1) 8:30 ON</p> <p>The first period starts and the air conditioner starts the cooling operation.</p> 	<p>2) 10:00 OFF</p> <p>In the second period, the classroom is unoccupied and the air conditioner stops.</p> 	<p>3) 13:00 ON</p> <p>When the third period starts, operation starts again.</p> 	<p>4) 15:00 OFF</p> <p>After the third period, the classroom becomes vacant again and the air conditioner stops.</p> 
--	---	---	--

Comfort

- **Individual airflow direction (*1)**

Airflow direction of each of the four air outlets can be controlled individually. (Positions 0 to 4, Swing, and No individual setting are selectable.)

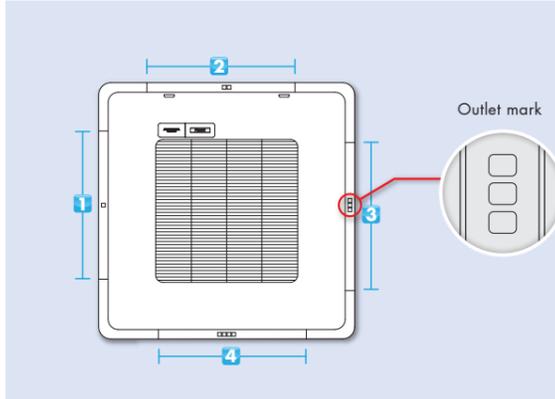

<p>1</p> 	<p>2</p> 
<p>3</p> 	<p>4</p> 

- **Auto airflow rate (*2)**

Airflow rate is automatically controlled in accordance with the difference between room temperature and set temperature.

*1 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQA series
*2 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQA series

Individual Control Systems for VRV Indoor Units

Simplified remote controller (Option)



BRC2E61

Easy operation with new intuitive design

Simple operation

Using only six buttons, users have direct access to basic functions. This enables them to easily set comfort to their preference.

- ON/OFF
- Operation mode
- Temperature setting
- Airflow rate (5-step & Auto)*
- Up and down airflow direction (5-step & Swing)*
- ON/OFF timer

*The number of airflow steps and availability of auto airflow rate and swing mode depend on the type of indoor unit.

Intuitive design

- By using pictograms, the user-friendly interface enables convenient and easy operation.

Compact size

- Measuring only 85 x 85 mm, the new remote controller is extremely compact and complements any interior design.



Individual Control Systems for VRV Indoor Units

Wired remote controller (Option)



BRC1C62-9

- Displays current airflow, swing, temperature operating mode and timer settings.

*Easier to read because LCD screen is larger.

- Digital display lets you set temperature in 1°C Units.
- Lets you individually programme by timer the respective times for operation start and stop within a maximum of 72 hours.
- Equipped with a thermostat sensor in the remote controller that makes possible more comfortable room temperature control.
- Enables you to select cool/heat/fan operation mode with the indoor remote controller of your choice without using the cool/heat selector.
- Constantly monitor malfunctions in the system for a min. of 40 items, and is equipped with a self-diagnosis function that lets you know through message immediately when a malfunction occurs.

- Lets you carry out various field setting by remote controller.
- Enables you to select the ventilation mode and the volume of the HRV.
- The rubber switch and the oil-resisting resin casing have been adopted for durability.
- When the auto-swing function is not available, the message, THIS FUNCTION IS NOT AVAILABLE is displayed when the wind direction adjustment button is pressed.

Individual Control Systems for VRV Indoor Units

Wireless remote controller (Option)



Signal receiver unit (Installed type)

- Then same operation mode and setting as with wired remote controllers are possible.
- *Individual airflow direction, auto air-flow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.
- A compact signal receiver unit (separate type) to be mounted into wall or ceiling is included.
- A signal receiver unit (installed type) for a Ceiling Mounted Cassette (Round Flow, Compact Multi Flow, Double Flow) type, Ceiling Suspended Type and Wall Mounted type is mounted into the Indoor unit.



Signal receiver unit can be installed on the panel.
Ex. Ceiling Mounted Cassette (Round Flow) type




Signal receiver unit (Installed type)

*Wireless remote controller and signal receiver unit are sold as a set
*Refer to page 90 for the name of each model

Simplified remote controller (Option)



Exposed type (BRC2C51)



Concealed type (For hotel use) (BRC3A61)

- The remote controller has centralised its frequently used operation selector and switches (in/off, operation mode, temperature setting and airflow volume), making itself suitable for use in hotel room or conference rooms.
- The exposed type remote controller is fitted with a thermostat sensor.




The concealed type remote controller smartly fits into a night or console panel in a hotel room.

Wide variation of remote controller for VRV indoor unit

	FXFQ-AVM FXFQ-S	FXZQ	FXCQ	FXUQ	FXEQ	FXDQ	FXMQ	FXHQ	FXAQ	FXL(N)Q	FXVQ
Navigation remote controller (Wired remote controller) BRC1E63	●	●	●	●	●	●	●	●	●	●	
Wired remote controller (BRC1C62)		●		●		●	●	●	●	●	
Wireless remote controller*	●	●	●	●	●	●	●	●	●	●	
Simplified remote controller (Exposed type) (BRC2C51)						●	●			●	
Simplified remote controller (Concealed type: for HOTEL use) (BRC3A61)						●	●			●	

Centralised Control Systems for VRV Indoor Units

- Up to 64 groups of indoor units (128 units) can be centrally controlled.
- Optional controllers for centralised control can be combined freely, and system can be designed in accordance with building scale and purpose.
- System integrated with various air conditioning peripheral equipment such as Heat Reclaim Ventilator is easy.
- Wiring can be run up to a length of 2km, and adapts easily to large-scale system expansion.

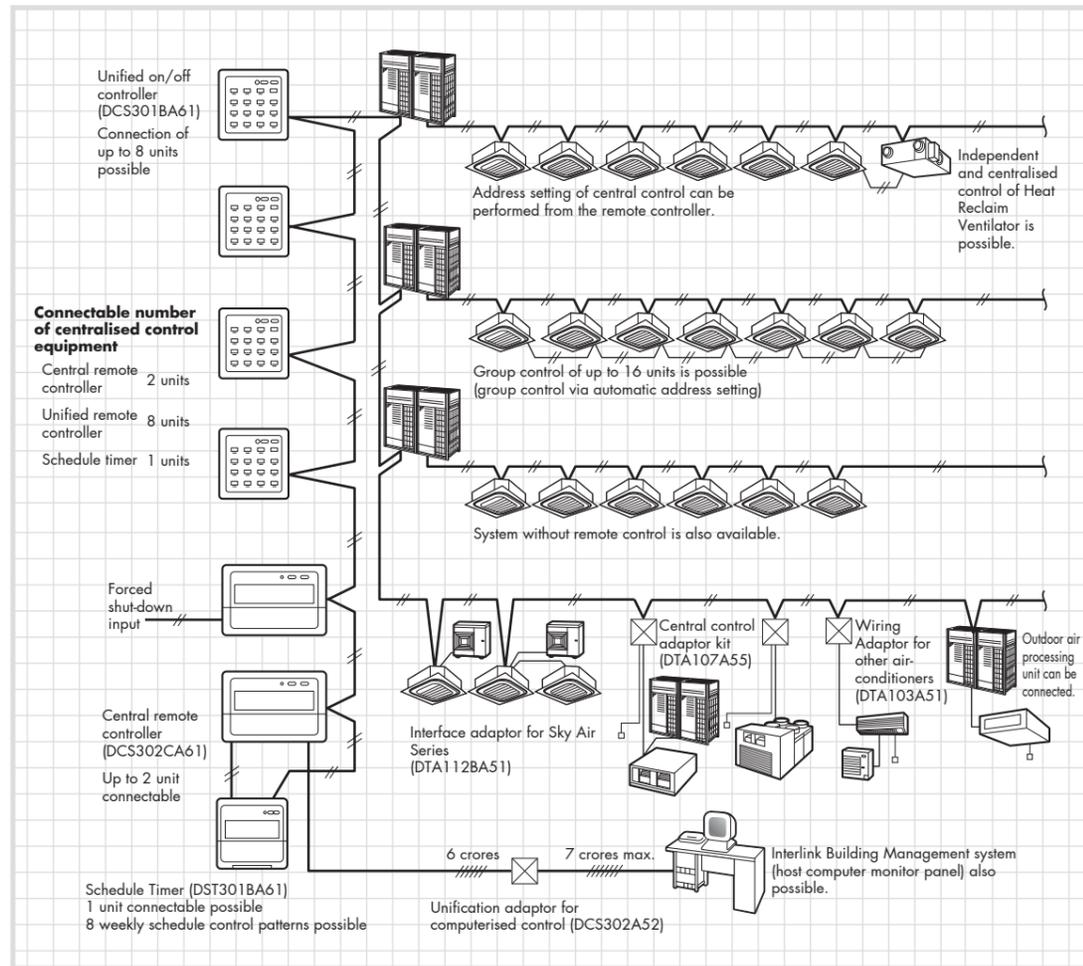

• Certain indoor units limit the functions of some control systems.

Centralised Control Systems for VRV Indoor Units

Residential remote controller (Optional)



DCS303A51

Max. 16 groups of indoor units can be easily controlled with the large LCD Panel.

- Max. 16 group (128 indoor units) controllable.
- Backlight and large LCD panel for easy readability.
- ON/OFF, temperature setting and scheduling can be controlled individually for indoor units.
- All indoor units can be turned on or off at once with "ALL" button.
- Outside temperature display.

*For residential use only. Cannot be used with other centralised control equipment.

Central remote controller (Optional)



DCS302CA61

Max. 64 groups(zones) of indoor units can be controlled individually same as LCD remote controller.

- Max. 64 group (128 indoor units) controllable.
- Max. 128 group (128 indoor units) are controllable by using 2 central remote controllers, which can be controlled from 2 different places.
- Zone control.
- Malfunction code display.
- Max. wiring length 1,000m (Total: 2,000m).
- Connectable with Unified ON/Off controller, schedule timer and BMS system.
- Airflow volume and direction can be controlled individually for indoor units in each group operation.
- Ventilation volume and mode can be controlled for Heat Reclaim Ventilator.
- Up to 4 ON/OFF pairs can be set per day by connecting a schedule timer.

Unified ON/OFF controller (Optional)



DCS301BA61

Max. 16 groups of indoor units can be operated simultaneously/individually.

- Max. 16 group (128 indoor units) controllable.
- 2 remote controllers can be used to control 2 different places.
- Operating status indication (Normal Operation, Alarm).
- Centralised control indication.
- Max. wiring length 1,000m (Total: 2,000m).
- Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Schedule timer and BMS system.

Schedule timer (Optional)



DST301BA61

Max. 128 indoor units can be operated as programmed schedule.

- Max. 128 indoor units controllable.
- When used in combination with a central remote controller, a maximum of 8 weekly schedule patterns can be set, while the central controller can be used to select desired zones. Up to 2 ON/OFF pairs can be set per day.
- Max. 8 hours back-up power supply.
- Max. wiring length 1,000m (Total: 2,000m).
- Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Unified ON/OFF controller and BMS system.

Advanced Control Systems for VRV Indoor Units



One touch selection enables flexible control of equipment in a building.



DCM601A51

Various types of equipment in a building can be controlled by a single controller.

Individual air-conditioning control

The flexible control achieved by the VRV system precisely meets different air conditioning needs in each room (e.g. offices, conference rooms, hotel rooms).



Lighting control


DAI-compatibile

DAI-compatible LED lighting systems can be controlled and monitored. Lighting control is enhanced through an interlock function with air conditioners and other functions.




Air conditioning control for large spaces

Air handling units can also be controlled. Large spaces, such as entrance halls and shopping malls, can be easily controlled to ensure comfort.

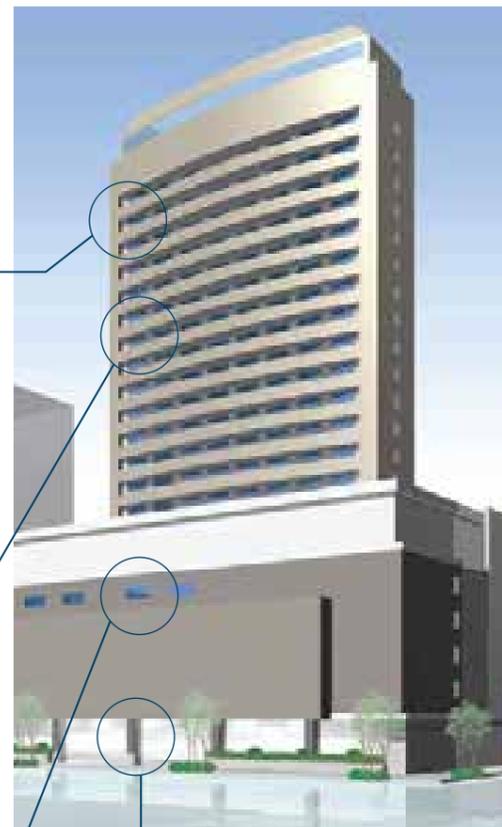

Building equipment control

Various types of equipment other than air conditioners, including ventilators, fans, and pumps, can also be controlled.



For Energy Saving & Comfort

Intelligent Touch Manager maximises the advantages of VRV features


Intelligent Touch Manager is an advanced multi-zone controller that provides the most cost-effective way to control and monitor the Daikin VRV system.

The 10.4" LCD touch screen is easy to use with three different screen views to include the floor plan layout view, icon view and list view and menus for system configurations.


It is also easy to use with standardised remote Web Access from your PC.

It can manage a total of 650 management points consisting of up to 512 Daikin indoor unit groups (up to 1024 indoor units) along with building equipment control / monitoring with Digital Inputs / Output (Di/Dio), Analog Inputs / Output (Ai/Ao) and Pulse input (Pi) optional devices.


Schedule the operation time for each application.

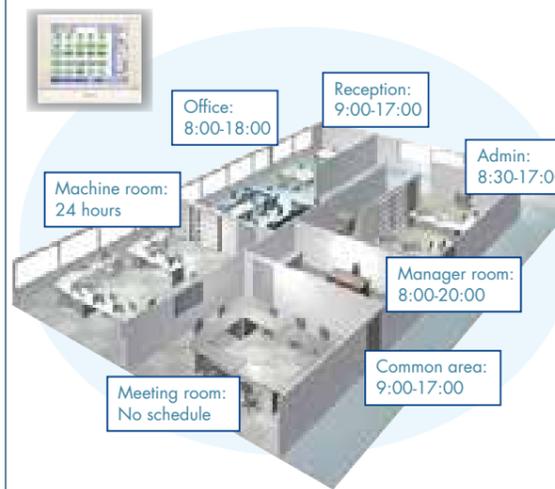


Define the set point range that users can change.

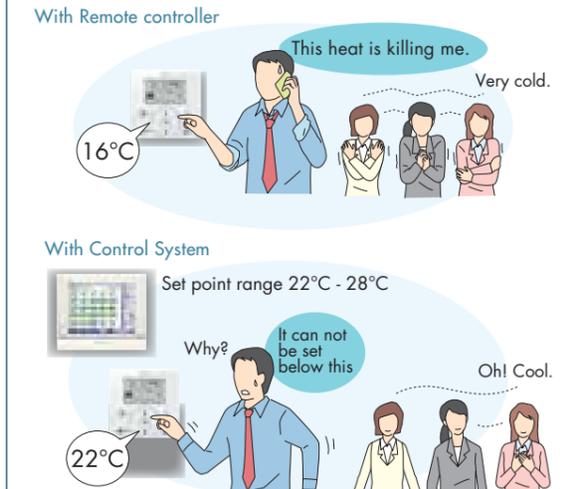

Turn the unit OFF, if a user didn't.

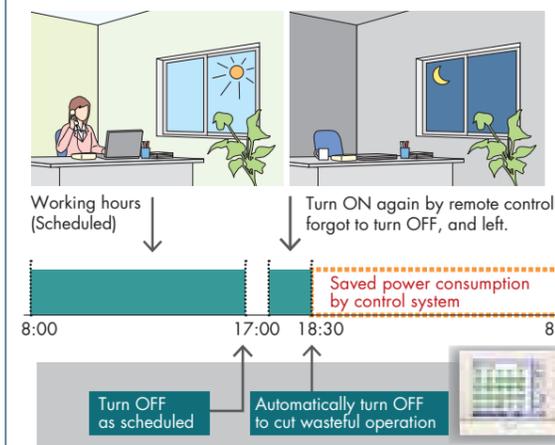

Reset set point regularly.

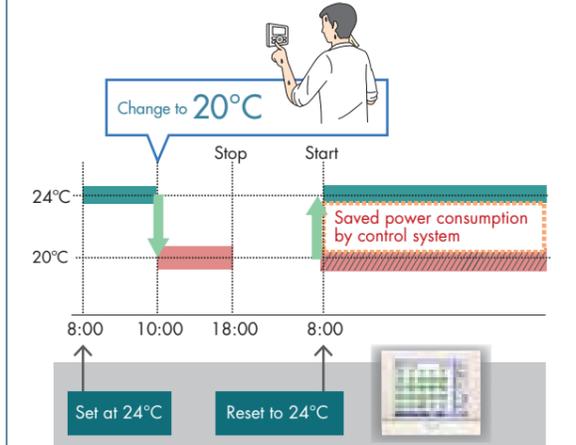

Advanced Control Systems for VRV Indoor Units

In addition to switching lights on and off, advanced lighting control, such as illuminance adjustment, can be achieved

Lighting control (Optional)

Connection to DALI - compatible lighting control system

Simple wiring (daisy chain) enables management of LED lighting by the *intelligent Touch Manager*.

Various air conditioning and lighting control is enabled through the interlock with occupancy sensors and illuminance sensors.

DALI-compatible

Please contact your local sales office for details.

Lighting control achieved by the intelligent Touch Manager


[Operation]

- Switch-on/switch-off operation
- Illuminance (1-100%) control
- Various illuminance patterns can be registered
- Registered pattern can be selected from *intelligent Touch Manager*

[Monitoring]

- Switch-on/switch-off status monitoring
- Lighting abnormality monitoring
- Illuminance monitoring
- DALI occupancy sensor monitoring
- DALI illuminance sensor monitoring

Air conditioning and lighting for which power consumption is high can be efficiently controlled to promote energy conservation and cost reduction!

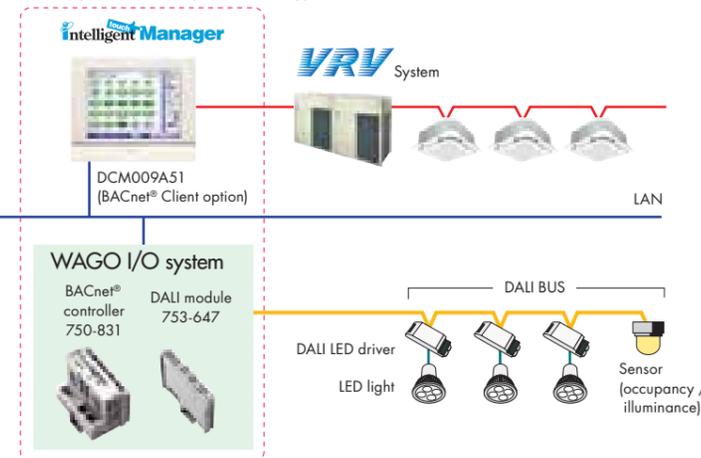

[Overview of control]

- Up to 5 DALI modules can be connected to a single BACnet® controller.
- Up to 64 DALI LED drivers (64 addresses) can be connected to a single DALI module.
- 64 DALI addresses can be freely assigned to up to 16 groups using a single DALI module.
- (Each group corresponds to a management point of the *intelligent Touch Manager*.)
- Up to 16 scenes can be set to a single DALI module.
- Up to 12 sensors (occupancy, illuminance) can be connected to a single DALI module.
- DALI BAS simplifies wiring and setting work by daisy chain wiring and automatic address setting.

Easy maintenance and energy saving by lighting control

Case 1

Switch-on / switch-off and illuminance are controlled based on a schedule to cut wasteful power consumption.


- Failing to switch off lights is prevented.



- Optimal illuminance reduces energy.

Case 2

Occupancy sensors are used to eliminate both wasteful lighting and air conditioning. When a room is unoccupied, the air conditioning stops and the lighting is switched off.

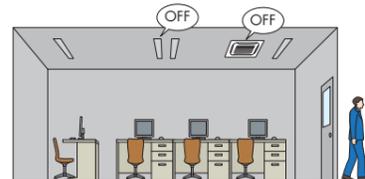

Case 3

Lighting abnormalities (e.g. burned-out bulbs) can be checked on the *intelligent Touch Manager* screen.

Lighting maintenance becomes easier and quicker.



The layout screen enables quick identification of specific locations.

Tenant Management (PPD Option)

Reporting the power consumption of VRV system for each tenant

With the PPD function, power consumption can be calculated for each indoor unit (Optional)


The energy consumption is proportionally calculated for each indoor unit. The data can be used for energy management and calculation of air conditioning usage fees for respective tenants.

Operational information of individual indoor units are monitored, based on distribution of power consumption of outdoor units.

Daikin's PPD keeps track of power distribution for each indoor unit. It performs air conditioning billing calculations quickly and automatically.

It is easy to output PPD data.

PPD data is output in CSV format to a PC or USB memory device and can be freely processed and managed.

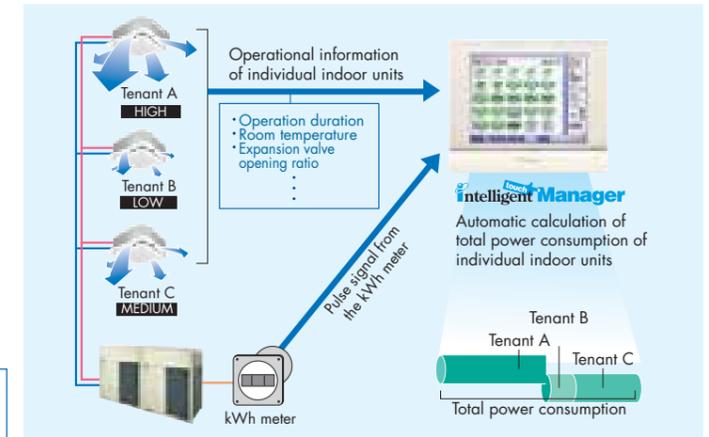

*PPD (Power Proportional Distribution) is Daikin's proprietary calculation method.


Air conditioning bills can be issued by one click

Electricity bills can be easily calculated for each tenant (Optional)

The power consumption of VRV controlled by the *intelligent Touch Manager* can be easily managed for each tenant using a PC. The electricity bill settings facilitate billing work through easy calculation and issuance of VRV electricity bills.

[Main functions]


- Register tenants
- Set the electricity unit price for 5 time zones
- Calculate power consumption and electricity charge for each tenant
- Show aggregation results in the specified period for each tenant
- Output the results (Printout and CSV file)

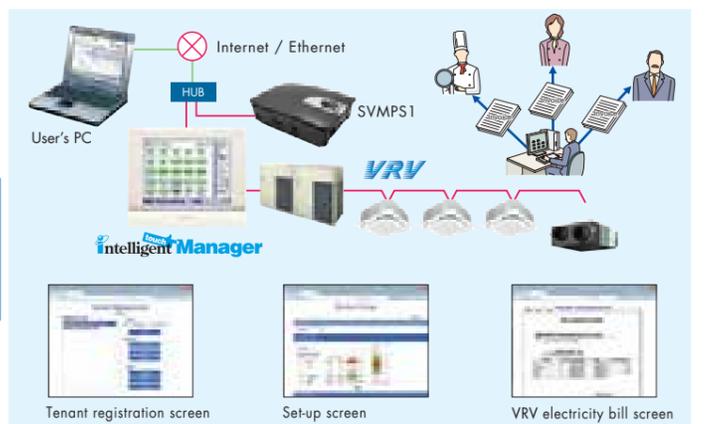

Advanced Control Systems for VRV Indoor Units

System structure

intelligent Touch Manager System Overview

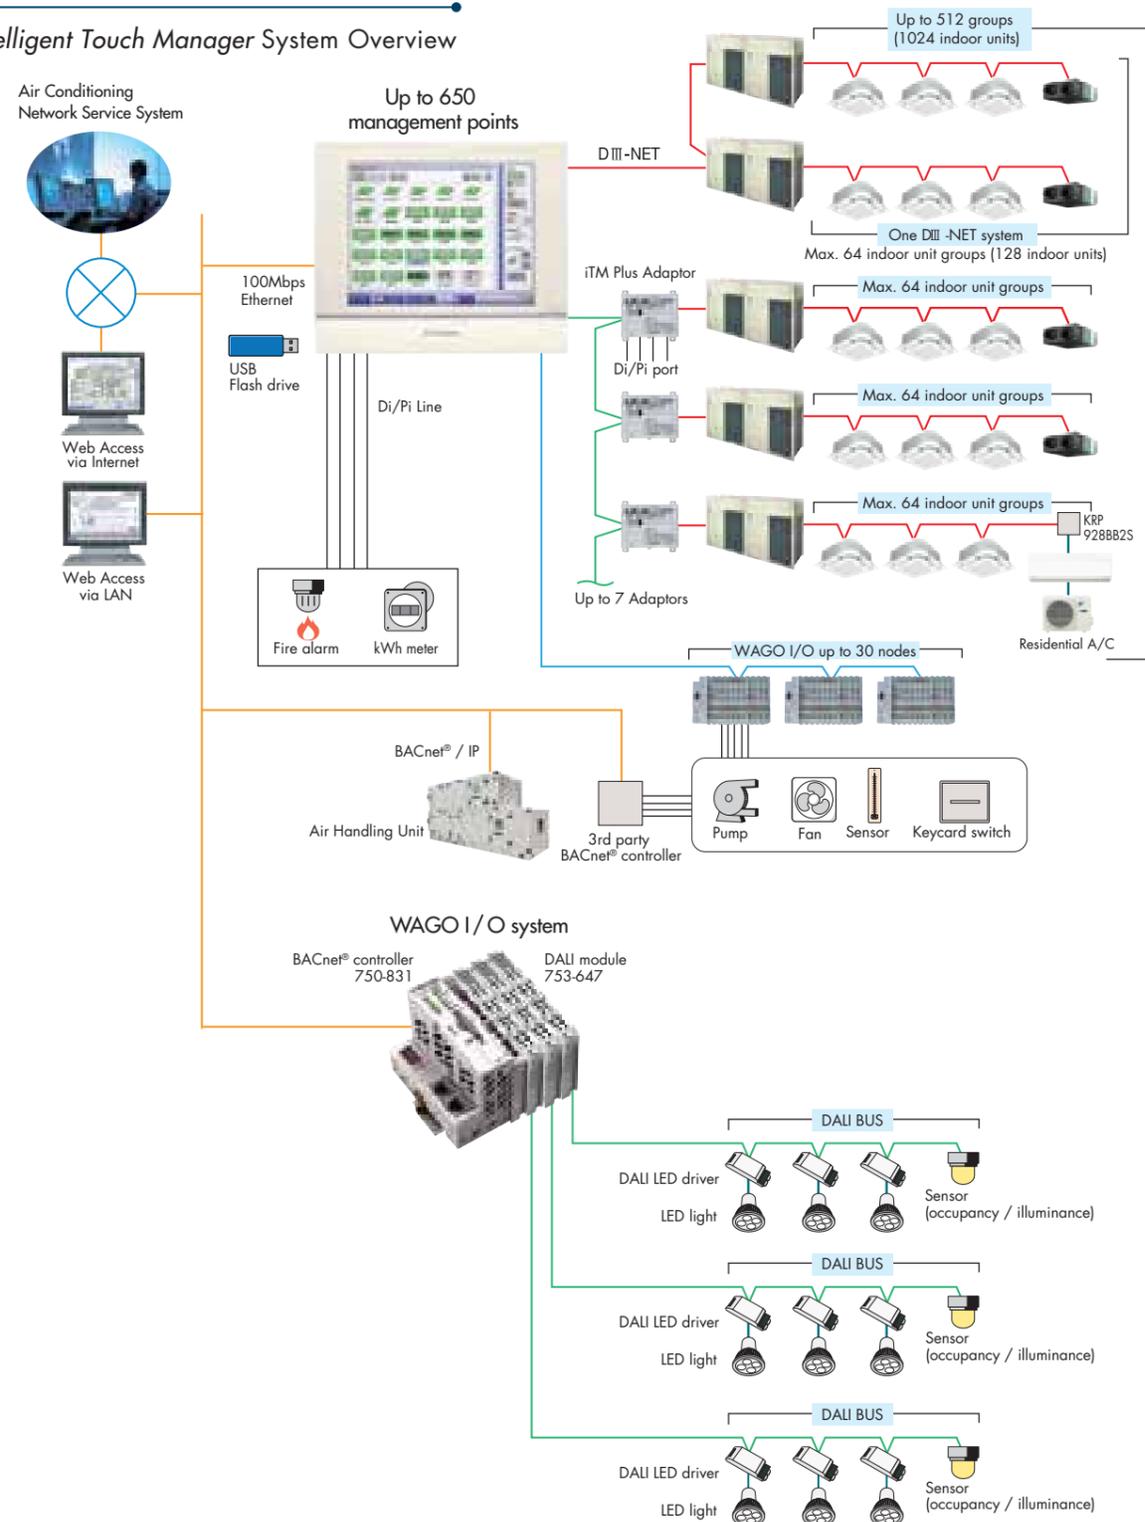


Air Conditioning Network Service System

Preventive Maintenance

The *intelligent Touch Manager* can be connected to Daikin's own Air Conditioning Network Service System for remote monitoring and verification of operation status for VRV system. By its ability to predict malfunctions, this service provides customers with additional peace of mind.

Enhanced convenience with link to the Air Conditioning Network Service System

The *intelligent Touch Manager* connects seamlessly to Daikin's 24-hour Air Conditioning Network Service System.

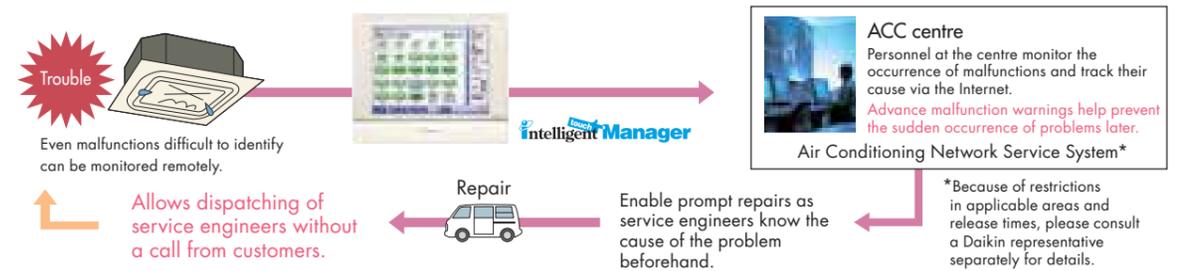

Daikin Offers a Variety of Control Systems

Convenient controllers that offer more freedom to administrators



Intelligent Controller

Ease of use and expanded control functions
The user-friendly controller features colours, multilingual function, and icons in the display for ease of understanding. A wide variety of control methods can be accommodated, permitting administrators to monitor and operate the system even when they are away from the controller.

Connect VRV system to your BMS via BACnet® or LONWORKS®

Compatible with BACnet® and LONWORKS®, the two leading open network communication protocols, Daikin offers interfaces that provide a seamless connection between VRV system and your BMS.



DMS502B51
(Interface for use in BACnet®)

BACnet®
Seamless connection between VRV system and BACnet® open network protocol.




DMS504B51
(Interface for use in LONWORKS®)

LONWORKS®
Facilitating the network integration of VRV system and LONWORKS®


Notes: 1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).
2. LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.

Modbus Interface Adaptor

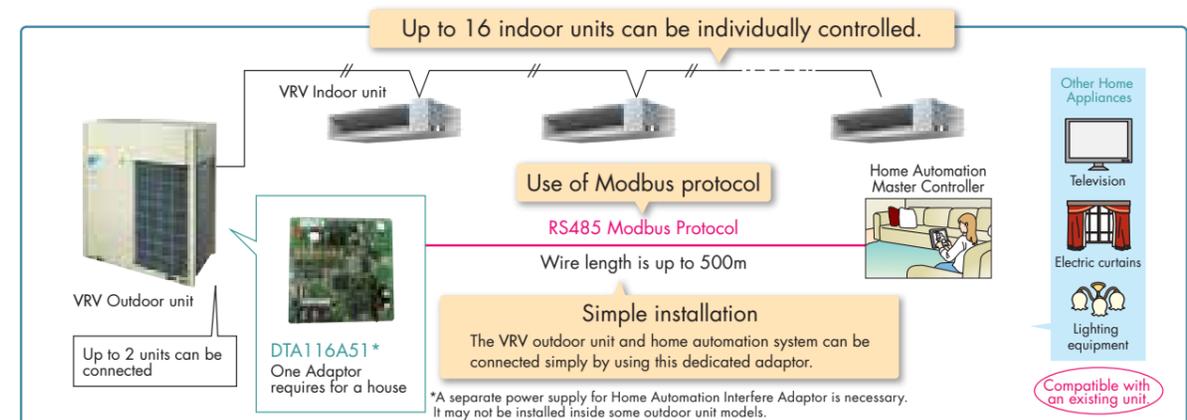

Integrated Building Monitoring System

The high speed transmission of DIII-NET enables more advanced control of the VRV system, providing you with enhanced comfort.

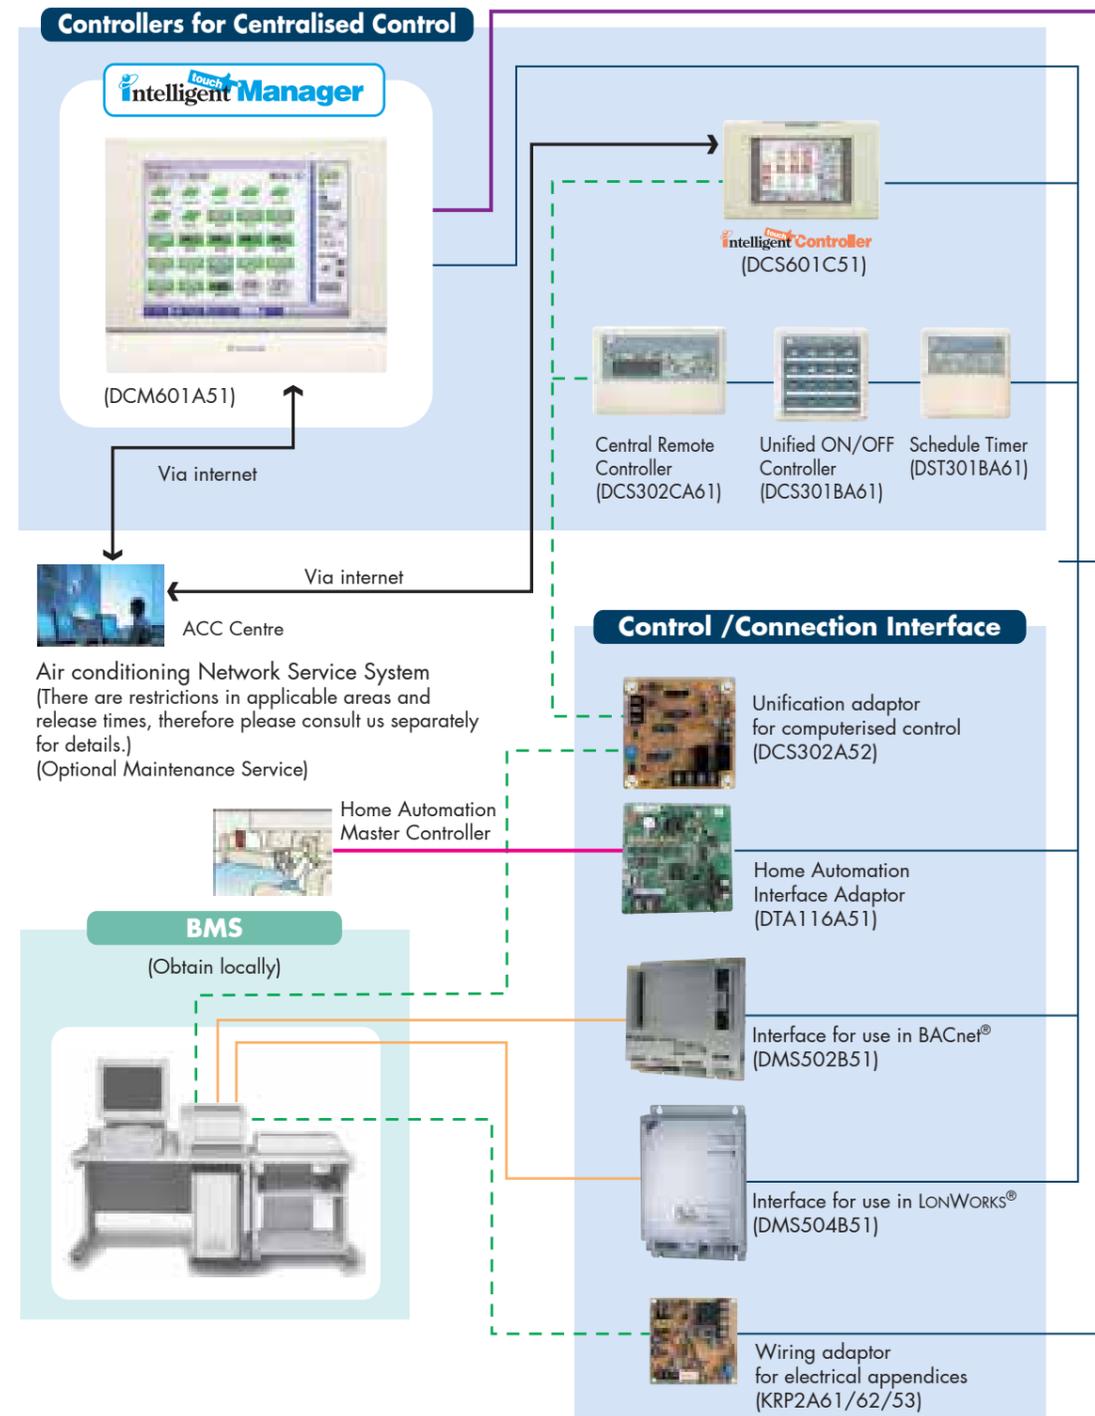

Integrated Building Monitoring System

- DIII-NET Line
- BACnet®/Ethernet or LONWORKS® Network Communication Line
- - - Contact Signal Line
- RS485 Modbus Line
- WAGO Connection


The DIII-NET system provides for:

- Close control and monitoring by integrating a wide variety of air conditioners in the entire building.
- Saving the in-building cabling using non-polar, two-wire cables. Easier wiring work with tremendously fewer wiring errors.
- Additional set-ups readily up and running. An extendable cabling up to 2 km in total.
- Different control equipment flexibly joined in the system for hierarchical risk diversification.
- Daikin's total heat exchangers and other devices all under integral control.

DIII-NET

(High Speed Multiple Transmission)

DIII-NET, Our unique high speed multiple transmission system, links airconditioners and various other building equipment in accordance with applications, scale and conditions and transmits vast amounts of information between them.

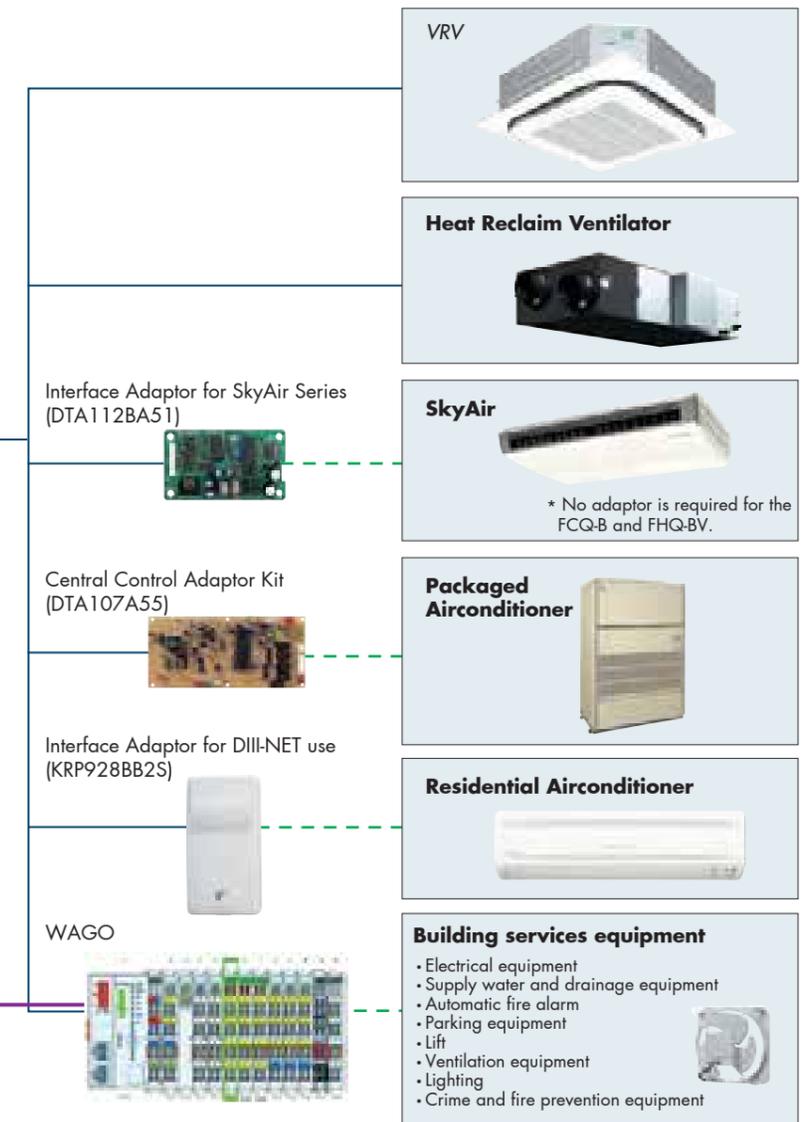

Caution: Limitation may apply to some models and functions. Please contact your local sales office for details. Consultation is necessary before employing this control system. Please contact your local sales office before making a purchase.

Note: BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.

Option List

Operation Control System Optional Accessories

For VRV indoor unit use

No.	Item	Type		FXFSQ-A (For Black Panel)	FXFSQ-A	FXZQ-M	FXUQ-A	FXCQ-M	FXEQ-A	FXDQ-PD FXDQ-ND
		Wireless	Receiver Handset	BRC7M634K	BRC7M632F-6 BRC4M150W16	BRC7M630W-6 BRC4M150W16	BRC7CB58	BRC7M65	BRC7M626-6 BRC4M150W16	BRC4M61-6 BRC3A61
1	Remote controller	Wireless	Receiver Handset	BRC7M634K	BRC7M632F-6 BRC4M150W16	BRC7M630W-6 BRC4M150W16	BRC7CB58	BRC7M65	BRC7M626-6 BRC4M150W16	BRC4M61-6 BRC3A61
2	Navigation remote controller (Wired remote controller)	Wired		BRC1E63	BRC1E63	BRC1E63	BRC1E63	BRC1E63	BRC1E63	BRC1E63
3	Simplified remote controller (Exposed type)									BRC2C51
4	Remote controller for hotel use (Concealed type)									BRC3A61
5	Adaptor for wiring			★KRP1C63	★KRP1B57	—	—	★KRP1B61	KRP1B61	★KRP1B56
6-1	Wiring adaptor for electrical appendices (1)			★KRP2A62	★KRP2A62	—	—	★KRP2A61	KRP2A61	★KRP2A53
6-2	Wiring adaptor for electrical appendices (2)			★KRP4AA53	★KRP4AA53	★KRP4AA53	★KRP4AA53	★KRP4AA51	KRP4AA51	★KRP4A54
7	Remote sensor (for indoor temperature)			KRCS01-4B	—	—	—	KRCS01-1B	—	—
8	Installation box for adaptor PCB ☆			Note 2, 3 KRP1H98	Note 4, 6 KRP1BA101	Note 4, 6 KRP1BA101	KRP1BA97	Note 2, 3 KRP1B96	—	Note 4, 6 KRP1BA101
9	External control adaptor for outdoor unit			★DTA104A62	★DTA104A62	—	—	★DTA104A61	DTA104A61	★DTA104A53
10	Adaptor for multi tenant			★DTA114A61	—	—	—	—	—	—

No.	Item	Type		FXMQ-P/ FXMQ-ARV	FXMQ-NVE	FXHQ-MA	FXAQ-A	FXLQ-MA FXNQ-MA	FXVQ-N
		Wireless	Receiver Handset	BRC4M61-6 BRC4M150W16	BRC4M61-6 BRC4M150W16	BRC7EA63W	BRC7N618-6 BRC4M150W16	BRC4M61-6 BRC4M150W16	—
1	Remote controller	Wireless	Receiver Handset	BRC4M61-6 BRC4M150W16	BRC4M61-6 BRC4M150W16	BRC7EA63W	BRC7N618-6 BRC4M150W16	BRC4M61-6 BRC4M150W16	—
2	Navigation remote controller (Wired remote controller)	Wired				BRC1E63	BRC1E63	BRC1E63	Note 8
3	Wired remote controller with weekly schedule timer					BRC1D61	BRC1D61	BRC1D61	Note 9
4	Simplified remote controller (Exposed type)			BRC2C51	BRC2C51	—	—	BRC2C51	—
5	Remote controller for hotel use (Concealed type)			BRC3A61	BRC3A61	—	—	BRC3A61	—
6	Adaptor for wiring			★KRP1C64	KRP1B61	KRP1BA54	—	KRP1B61	KRP1C67
7-1	Wiring adaptor for electrical appendices (1)			★KRP2A61	KRP2A61	★KRP2A61	★KRP2A61	KRP2A61	—
7-2	Wiring adaptor for electrical appendices (2)			★KRP4AA51	KRP4AA51	★KRP4AA52	★KRP4AA52	KRP4AA51	KRP2A62
8	Remote sensor (for indoor temperature)			KRCS01-4B	—	—	—	KRCS01-1B	—
9	Installation box for adaptor PCB ☆			Note 1 KRP4A96	—	Note 3 KRP1CA93	Note 1 KRP4AA93	—	—
10	External control adaptor for outdoor unit			★DTA104A61	DTA104A61	★DTA104A62	★DTA104A61	DTA104A61	DTA104A62
11	Adaptor for multi tenant			★DTA114A61	—	—	★DTA114A61	—	—
12	External control adaptor for cooling/heating			—	—	—	—	—	KRP6A1
13	Remote controller with key			—	—	—	—	—	KRCB37-1

Function List

		Round Flow with Sensing Type
		FXFSQ-A
Remote controller	Wired	BRC1E63
	Wireless	—
Dual sensors *1		○
Direct airflow *1		○
Sensing sensor low mode *1		○
Sensing sensor stop mode *1		○
Circulation airflow		○
Individual airflow direction control		○
Switchable 5 step fan speed		○
Auto-airflow rate		○
Auto-swing		○
Swing pattern selection		○
High ceiling application		○

Notes:

- Installation box ☆ is necessary for each adaptor marked ★.
- Up to 2 adaptors can be fixed for each installation box.
- Only one installation box can be installed for each indoor unit.
- Up to 2 installation boxes can be installed for each indoor unit.
- Installation box ☆ is necessary for second adaptor.
- Installation box ☆ is necessary for each adaptor.
- Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62/BRC1E63. Cannot be set via other remote controllers.
- Since the control panel is equipped as standard, use the option for 2 remote control system.
- When using BRC1E62/ BRC1E63, be sure to remove the control panel and since BRC1E62/BRC1E63 cannot be stored inside the indoor unit, please place it separately.

Option List

System Configuration

No.	Item	Type	Model No.	Function
1	Residential central remote controller		Note 2 DCS303A51	• Up to 16 groups of indoor units (128 units) can be easily controlled using the large LCD panel. ON/OFF, temperature settings and scheduling can be controlled individually for indoor units.
2	Central remote controller		DCS302CA61	• Up to 64 groups of indoor units (128 units) can be connected, and ON/OFF, temperature setting and monitoring can be accomplished individually or simultaneously. Connectable up to 2 controllers in one system.
2-1	Electrical box with earth terminal (3 blocks)		KJB311AA	• Up to 64 groups of indoor units (128 units) can be turned, ON/OFF individually or simultaneously, and operation and malfunction can be displayed. Can be used in combination with up to 8 controllers.
3	Unified ON/OFF controller		DCS301BA61	• Programmed time weekly schedule can be controlled by unified control for up to 64 groups of indoor units (128 units). Can turn units ON/OFF twice per day.
3-1	Electrical box with earth terminal (2 blocks)		KJB212AA	• Up to 5 indoor units can be controlled. This is a low cost system which can only control ON/OFF.
3-2	Noise filter (for electromagnetic interface use only)		KEK26-1A	• Adaptors required to connect products other than those of the VRV System to the high-speed DIII-NET communication system adopted for the VRV System.
4	Schedule timer		DST301BA61	* To use any of the above optional controllers, an appropriate adaptor must be installed on the product unit to be controlled.
5	5-room centralised controller for residential indoor units	For CDXS, FDK(X)S, FTK(X)S	Note 3 KRC72A	• Up to 1024 units can be centrally controlled in 64 different groups.
6	Interface adaptor for residential indoor units	For CDXS, FDK(X)S, FTK(X)S	KRP928BB2S	• Wiring restrictions (max. length: 1,000m, total wiring length: 2,000m, max. number of branches: 16) apply to each adaptor.
7	Interface adaptor for SkyAir-series	For FCQ-B, FFQ-B, FHQ-BV, FBQ-B	★DTA112BA51	• Fixing plate for DTA109A51
8	Central control adaptor kit	For UAT(Y)-K(A), FDK	★DTA107A55	
9	Wiring adaptor for other air-conditioner		★DTA103A51	
10	DIII-NET Expander Adaptor		DTA109A51	
10-1	Mounting plate		KRP4A92	

Note: 1. Installation box for ★ adaptor must be obtained locally.

- For residential use only. Cannot be used with other centralised control equipment.
- A wiring adaptor (KRP413AB1S) is also required for each indoor unit.

Building Management System

No.	Item	Type	Model No.	Function
1	intelligent Touch Controller	Basic	DCS601C51	• Air conditioning management system that can be controlled by a compact all-in-one unit.
1-1		Option	DCS601A52	• Additional 64 groups (10 outdoor units) is possible.
1-2	Electrical box with earth terminal (4 blocks)		KJB411A	• Wall embedded switch box.
2	intelligent Touch Manager	Basic	DCM601A51	• Air conditioning management system that can be controlled by touch screen.
2-1		Hardware	DCM601A52	• Additional 64 groups (10 outdoor units) is possible. Max. 7 iTM plus adaptors can be connected to intelligent Touch Manager.
2-2		Option	DCM002A51	• Power consumption of indoor units are calculated based on operation status of the indoor unit and outdoor unit power consumption measured by kWh metre.
2-3		Software	DCM008A51	• Building energy consumption is visualised. Wasted air conditioning energy can be found out.
2-4			DCM008A51	• Building energy consumption is visualised. Wasted air conditioning energy can be found out.
2-5	Di unit		DEC101A51	• 8 pairs based on a pair of ON/OFF input and abnormality input.
2-6	Dio unit		DEC102A51	• 4 pairs based on a pair of ON/OFF input and abnormality input.
3		*1 Interface for use in BACnet®	DMS502B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through BACnet® communication.
3-1		Optional DIII board	DAM411B51	• Expansion kit, installed on DMS502B51, to provide 2 more DIII-NET communication ports. Not usable independently.
3-2		Optional Di board	DAM412B51	• Expansion kit, installed on DMS502B51, to provide 16 more wattmeter pulse input points. Not usable independently.
4		*2 Interface for use in LONWORKS®	DMS504B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through LonWorks® communication.
5		Home Automation Interface Adaptor	DTA116A51	• Use of the Modbus protocol enables the connection of the VRV system with a variety of home automation systems from other manufacturers.

Notes:

- BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).
- LonWorks® is a trademark of Echelon Corporation registered in the United States and other countries.
- Installation box for ★ adaptor must be obtained locally.


Integrate your air handling unit for large size spaces such as factories and for fresh air solutions.

Capacity range : 6 - 60 HP



- Easy design and installation
- The system is easy to design and install since no additional water systems such as boilers, tanks, gas connections, etc. are required
- Inverter controlled units
- Control of air temperature via standard Daikin wired remote control

System overview

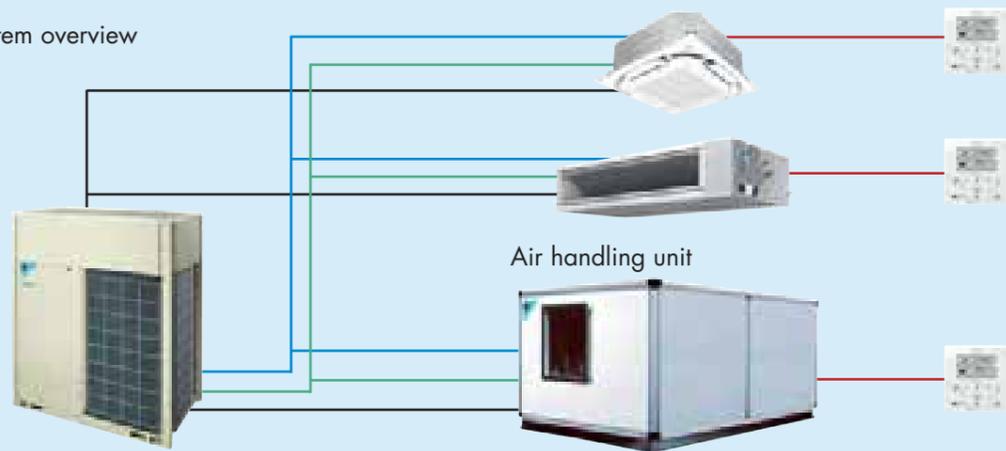

— Daikin communication wire (F1, F2 communication) — Liquid pipe
— Other communication wire — Gas pipe

Air handling units can be connected to VRV systems. This combination can be built to order as a system. Outdoor air series is also possible. Please contact your local sales office for details.

*Control box and expansion valve kit are necessary for integration of AHU and VRV system.

The Innovative Refrigerant Piping of next generation


Daikin innovated Next Generation of Quality and Efficiency for VRV Installation. It offers differentiated solutions in installation. It ensures quality installation with reduction of site work.



Header Pack

Advantage

- Installation time saving: Up to 1/3 of conventional method
- Easy to Install: Hanging points available
- Safety: Consists of flaring method, no brazing required*
- Space saving: Header pack to indoor unit soft drawn pipe, top side of refrigerant pipe doesn't need space for brazing torch movement
- Quality Installation: Elimination of difficult process, enhancing quality Installation

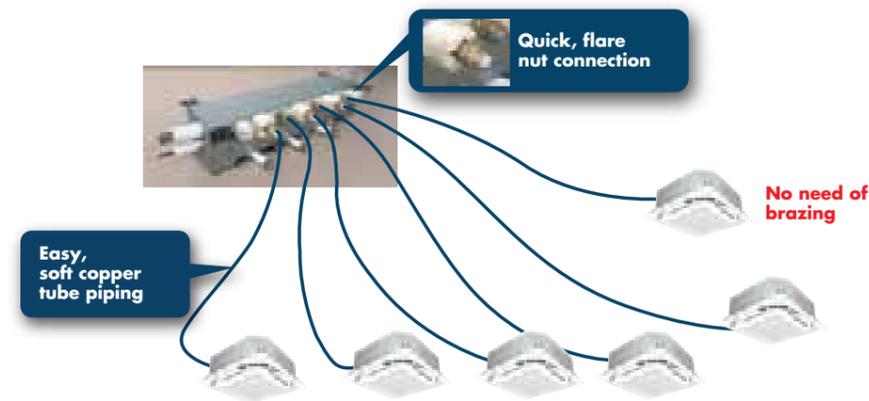

Compact design to fit into narrow attic space

Light weight and the compact body give minimum damage on the building structure.

Header Pack Line-up

Model Name	HP	Piping connections (Liquid/Gas mm)		Indoor unit total capacity index
		Outdoor unit side	Indoor unit side	
BHF6RHP6	6	Φ9.5/Φ15.9	(Φ9.5/Φ15.9)×1 (Φ6.4/Φ12.7)×3	<150
BHF8RHP6	8	Φ9.5/Φ19.1	(Φ9.5/Φ15.9)×3 (Φ6.4/Φ12.7)×3	150 ≤ X < 200
BHF10RHP6	10	Φ9.5/Φ22.2		200 ≤ X < 290
BHF16RHP6	16	Φ12.7/Φ28.6		290 ≤ X < 420



For More information
'Scan Me'

Non-brazed connection for Refrigerant piping

Evolutionally - Advanced Feature

A combination of rubber packing and screwed metal body offers gas-tight and rigid connection without brazing. Patented "Leverage Method" mechanically holds the pipe and prevents it from pull-out.




Mechanism

As the nut turns, the "B" point of leverage corns are compressed and encroached to the surface of the pipe. When the pull-out force increases, the corns are encroached more deeper to prevent pipe pull-out.



For More information 'Scan Me'

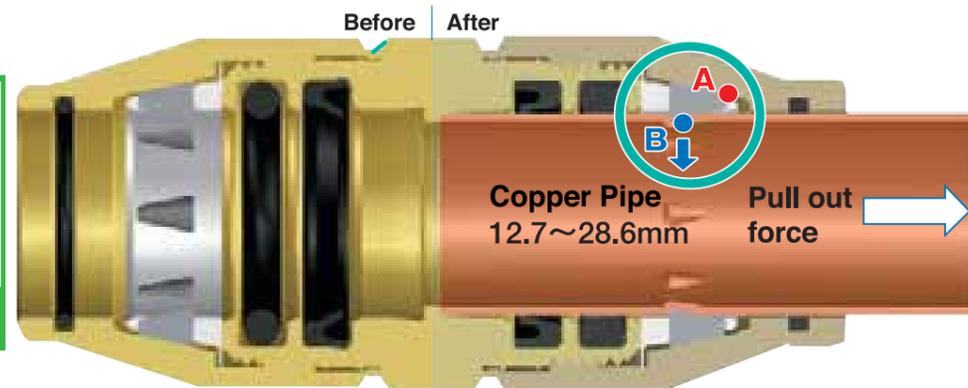

Excellent performance

By the unique double sealing method, the sealing performance is secured over a long period even under such severe conditions as pressure of 4.3MPa during temperature of -45 °C through +130 °C.

Fire Free Connection

Neither nitrogen gas replacement nor fire prevention cure is required. The time for installation is shorten and the total cost is reduced. The installation quality is much more stable compared with a brazing method.


Durable for high pressure

By leverage method, the pull-out resistance is more than 4 times (17.2MPa) of the max. operating pressure.



Easy Installation

The installation is completed by only one or two turns for a nut with low torque tightening without any special tools (regular wrenches or spanners are used) in the limited small space.

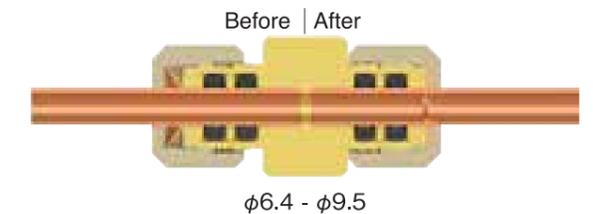

Daikin Gas Tight Joint Line up (Matching for various piping sizes)

Standard Joints (Connecting the same pipes)

Figure	Model Name	Dimension (mm)			Weight/PC(g)
		ND	AF	L	
	BDGTA06	Ø6.4	19.0	46.2	106
	BDGTA09	Ø9.5	22.2	51.4	139
	BDGTA12	Ø12.7	23.8	82.3	170
	BDGTA15	Ø15.9	29.7	82.8	236
	BDGTA19	Ø19.1	35.0	85.5	327
	BDGTA22	Ø22.2	38.0	93.5	401
	BDGTA28	Ø28.6	45.0	99.5	546
	BDGTA34	Ø34.9	51.1	101.5	686
	BDGTA41	Ø41.3	58.3	103.5	881

Asymmetry joints (Connecting different size pipes)

Figure	Model Name	Dimension (mm)			Weight/PC(g)	
		ND	AF	L		
	BDGTA1209	Ø12.7-Ø9.5	24.0	22.0	62.4	158
	BDGTA1512	Ø15.9-Ø12.7	29.7	23.8	83.2	220
	BDGTA2219	Ø22.2-Ø19.1	38.0	35.0	87.4	362
	BDGTA2825	Ø28.6-Ø25.4	45.0	41.8	94.4	510




VRV X

AIR TREATMENT EQUIPMENT LINEUP

Our air treatment systems create a higher air quality environment

Components of Indoor Air Quality

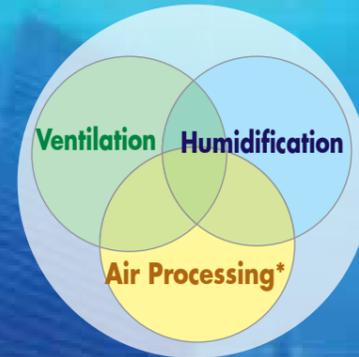

*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

A recent trend rapidly gaining popularity is the need for air treatment along with air conditioning. Our Outdoor-Air Processing Unit can combine fresh air treatment and air conditioning, supplied from a single system. It adjusts the temperature of air from outdoors using a fixed discharge temperature control. Along with Outdoor-Air Processing Units, we also offer Heat Reclaim Ventilator systems. The Heat Reclaim Ventilator VAM-GJ series units in particular have been praised for their compactness, energy conservation and extensive operation range of outdoor temperatures. This series provides higher enthalpy efficiency ★¹, due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure ★² offers more flexibility for installation. The Heat Reclaim Ventilator VKM-GAM series units, equipped with a DX-coil and a humidifier, provide further advanced features, such as temperature adjustment to suit conditions indoors and to prevent cold air from blowing on people directly during heating operation. The series also realises significant energy savings by exercising heat recovery.

★1 For models: VAM 250/650/800/1000/2000GJVE

★2 For models: VAM 500GJVE

		Outdoor-Air Processing Unit	Heat Reclaim Ventilator		
			VKM-GAM Type	VKM-GA Type	VAM-GJ Type
Connections with VRV X	Refrigerant Piping	Connectable	Connectable	Not connectable	
	Wiring	Connectable	Connectable	Connectable	
	After-cool & After-heat Control	Available	Available	Not available	
Heat Exchange Element		—	Energy savings obtained	Energy savings obtained	
Humidifier		—	Fitted	—	
High Efficiency Filter		Option	Option	Option	
Ventilation System		Air supply only	Air supply & air exhaust	Air supply & air exhaust	
Power Supply		220-240 V, 50 Hz	220-240 V, 50 Hz	220-240 V/220 V, 50 Hz	
Airflow Rate				250 m ³ /h	
			500 m ³ /h	500 m ³ /h	
			800 m ³ /h	650 m ³ /h	
			1000 m ³ /h	800 m ³ /h	
		1080 m ³ /h		1000 m ³ /h	
		1680 m ³ /h		1500 m ³ /h	
	2100 m ³ /h		2000 m ³ /h		

*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

Outdoor-Air Processing Unit


Combination of fresh air treatment and air conditioning, supplied from a single system.

Lineup

Model Name	FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Capacity Index	125	200	250




Fresh air treatment and air conditioning can be achieved with a single system by using the heat pump technology - without the usual troublesome air supply and air discharge balance design. Fan coil units for air conditioning and an outdoor-air processing unit can be connected to the same refrigerant line. The results are enhanced design flexibility and a significant reduction in total system costs.

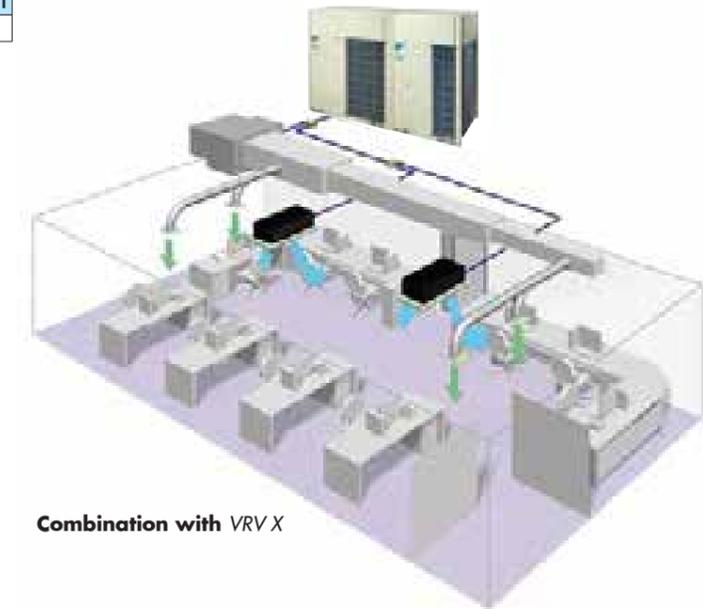

Combination with VRV X

Air conditioning and outdoor air processing can be accomplished using a single system.

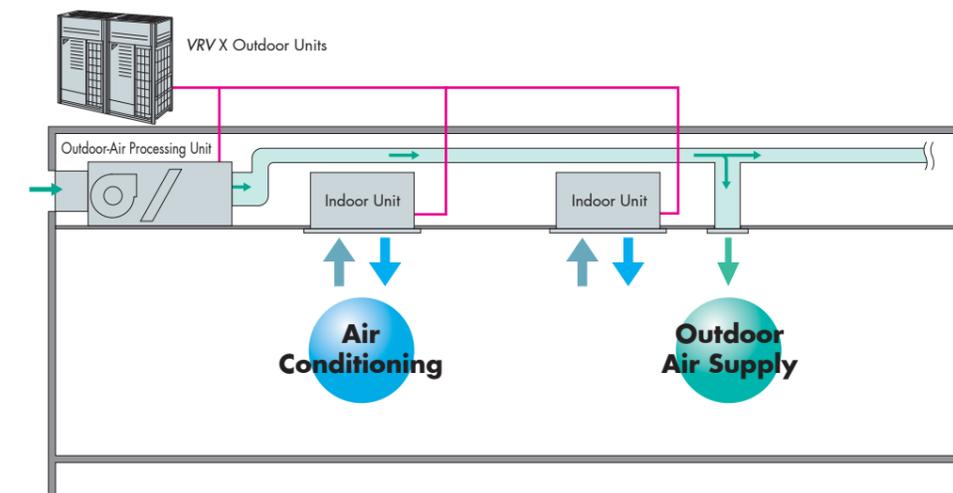

Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- When outdoor-air processing units are connected, the total connection capacity index must be 50% to 100% of the capacity index of the outdoor units.
- When outdoor-air processing units and standard indoor units are connected, the total connection capacity index of the outdoor-air processing units must not exceed 30% of the capacity index of the outdoor units.
- Outdoor-air processing units can be used without indoor units.

Standard Specifications

Indoor unit


Type		Ceiling Mounted Duct Type		
Model		FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Power supply		1-phase 220-240 V (also required for indoor units), 50 Hz		
Cooling capacity *1	kcal/h	12,000	19,300	24,100
	Btu/h	47,800	76,400	95,500
	kW	14.0	22.4	28.0
Heating capacity *1	kcal/h	7,700	12,000	15,000
	Btu/h	30,400	47,400	59,400
	kW	8.9	13.9	17.4
Power consumption		0.359	0.548	0.638
Casing		Galvanised steel plate		
Dimensions (HXWXD)		470x744x1,100		470x1,380x1,100
Fan	Motor output	kW		
	Airflow rate	m ³ /min		
	External static pressure	Pa		
Air filter		*2		
Refrigerant piping	Liquid	mm		
	Gas	mm		
	Drain	mm		
Machine weight		86	123	
Sound level *3		42/43	47/48	
Connectable outdoor units *4 *5		6 HP and above		10 HP and above
Operation range (Fan mode operation between 15 and 19°C)		Cooling	19 to 43°C	
		Heating	-5 to 15°C	
Range of the discharge temperature *6		Cooling	13 to 25°C	
		Heating	18 to 30°C	

Notes: *1. Specifications are based on the following conditions:
 • Cooling: Outdoor temp. of 33°CDB, 28°CWB (68% RH), and discharge temp. of 18°CDB.
 • Equivalent reference piping length: 7.5 m (0 m horizontal)
 *2 An intake filter is not supplied, so be sure to install the optional long-life filter or high-efficiency filter. Please mount it in the duct system of the suction side. Select a dust collection efficiency (gravity method) of 50% or more.

*3 Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. These values are normally somewhat higher during actual operation as a result of ambient conditions.
 *4 It is possible to connect to the outdoor unit if the total capacity of the indoor units is 50% to 100% of the capacity index of the outdoor units.
 *5 Local setting mode. Not displayed on the remote controller.
 • This equipment cannot be incorporated into the remote group control of the VRV X system.

Dimensions

FXMQ125/200/250MFV1

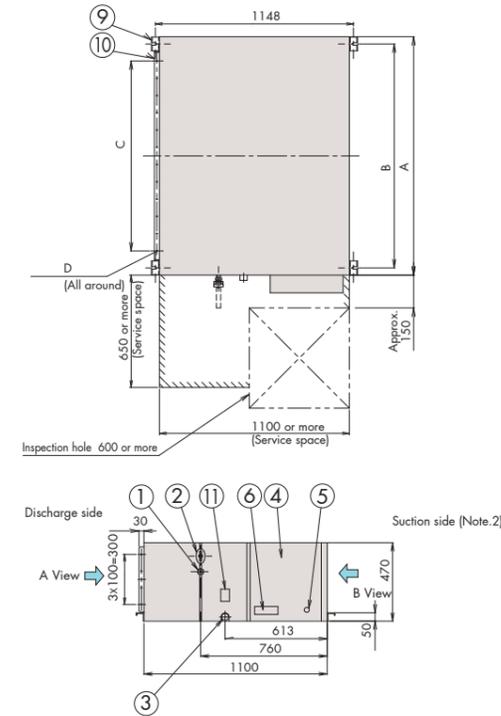

*These diagrams are based on FXMQ200 and FXMQ250MFV1.

Local connection piping size

Model	Gas piping diameter	Liquid piping diameter
FXMQ125MFV1	ø15.9	ø9.5
FXMQ200MFV1	ø19.1 attached piping	ø9.5
FXMQ250MFV1	ø22.2 attached piping	ø9.5

Table of dimensions

Model	A	B	C	D
FXMQ125MFV1	744	685	5x100=500	20-ø 4.7 hole
FXMQ200MFV1	1380	1296	11x100=1100	32-ø 4.7 hole
FXMQ250MFV1	1380	1296	1380	32-ø 4.7 hole

Notes:

- The attached piping in the diagram is for FXMQ200MFV1 and FXMQ250MFV1 only. The gas piping connection port (2) in the diagram has a different bore form with FXMQ125MFV1.
- An air filter is not supplied with this unit. Be sure to mount an air filter in the suction side. [Use a filter with dust collection efficiency of at least 50% (gravimetric method). This is available as an option.]
- For outdoor ducts, be sure to provide heat insulation to prevent condensation.

- ① Liquid pipe connection
- ② Gas pipe connection
- ③ Drain piping connection
- ④ Electric parts box
- ⑤ Ground terminal
- ⑥ Name plate
- ⑦ Power supply wiring connection
- ⑧ Transmission wiring connection
- ⑨ Hanger bracket
- ⑩ Discharge companion flange
- ⑪ Water supply port
- ⑫ Attached piping (Note. 1)

Options


Indoor unit

Model		FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Operation/control	Operation remote controller	BRC1E62/BRC1C62		
	Central remote controller	DCS302CA61		
	Unified ON/OFF controller	DCS301BA61		
	Schedule timer	DST301BA61		
	Wiring adaptor for electrical appendices (1)	KRP2A61		
	Wiring adaptor for electrical appendices (2)	KRP4AA51α		
Filters	Long-life replacement filter	KAFJ371L140	KAFJ371L280	
	High-efficiency filter	Colourimetric method 65%	KAFJ372L140	
		Colourimetric method 90%	KAFJ373L140	
	Filter chamber *1	KDJ3705L140	KDJ3705L280	
Drain pump kit		KDU30L250VE		
Adaptor for wiring		KRP1B61		


Notes: *1. Filter chamber has a suction-type flange. (Main unit does not.)
 • Dimensions and weight of the equipment may vary depending on the options used.
 • Some options may not be usable due to the equipment installation conditions, so please confirm prior to ordering.

• Some options may not be used in combination.
 • Operating sound may increase somewhat depending on the options used.


FXMQ200/250MFV1

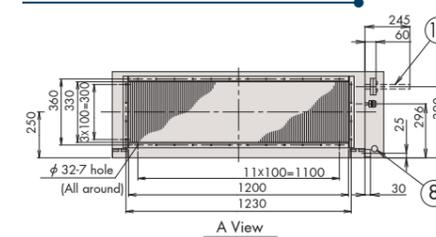

A View

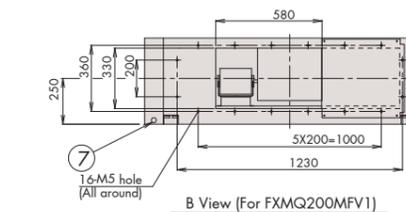


B View (For FXMQ200MFV1)

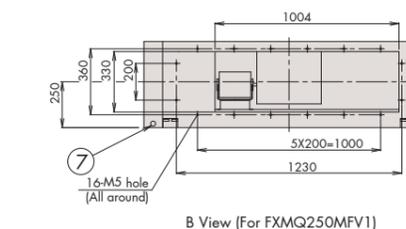


B View (For FXMQ250MFV1)

FXMQ125MFV1

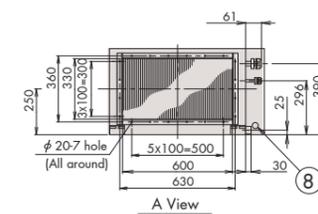

A View

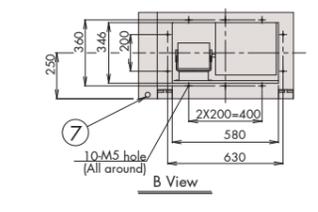

B View

Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series




For More information 'Scan Me'

The Heat Reclaim Ventilator lineup features the DX-coil in response to recently diversifying outdoor air introduction requirements.

Line-up

With DX Coil & Humidifier Type			
Model Name	VKM50GAMV1	VKM80GAMV1	VKM100GAMV1
Capacity Index	31.25	50	62.5

With DX Coil Type			
Model Name	VKM50GAV1	VKM80GAV1	VKM100GAV1
Capacity Index	31.25	50	62.5

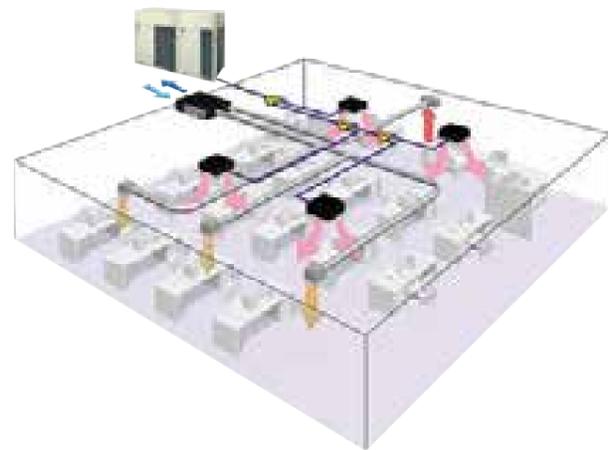

VKM80GAV1



Humidifier

The line-up includes models with a humidifier, in response to diversifying customer requirements. (VKM50/80/100GAMV1 only)

DX-coil

The Heat Reclaim Ventilator features DX-coil that contributes to the prevention of cold airflow hitting people directly during heating operation, due to the after-cool, after-heat operations done beforehand.


High static pressure

High external static pressure means enhanced design flexibility.

Efficient outdoor air introduction is possible

The Heat Reclaim Ventilator (VKM series) series introduces fresh outdoor air with minimum heat losses, while a wide variety of features responds to customer requirements.

Air conditioning and outdoor air processing can be accomplished using a single system.

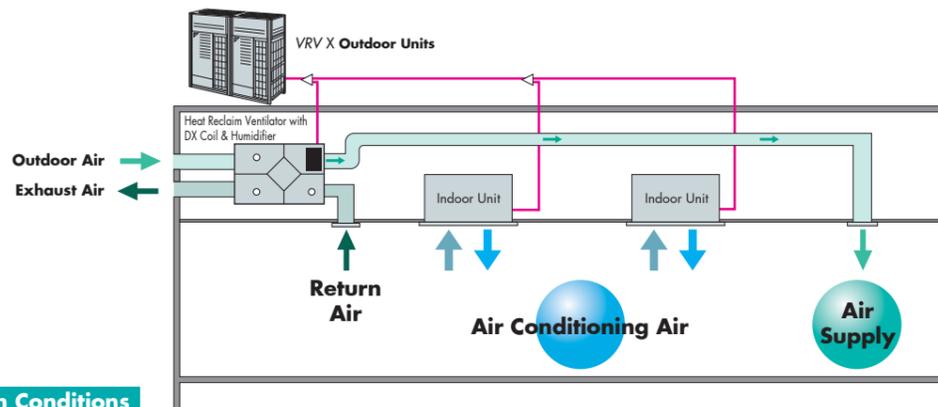

Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- When the Heat Reclaim Ventilator VKM series units are connected, the total connection capacity index must be 50% to 130% of the capacity index of the outdoor units.

Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series


A compact unit packed with our cutting-edge technology




For More information 'Scan Me'



HEP Element (Anti-mould)

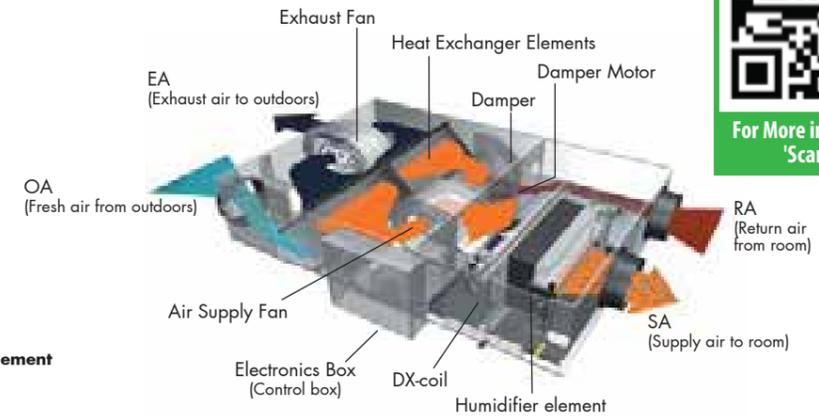

Operation of the heat exchanger element

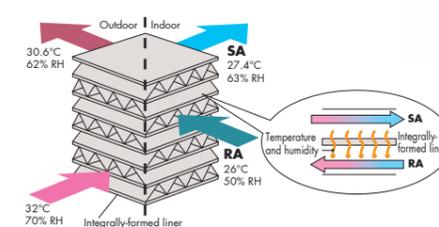


DX-coil (Direct expansion coil)



Humidifier element

Heating and humidification process

Structure of VKM series

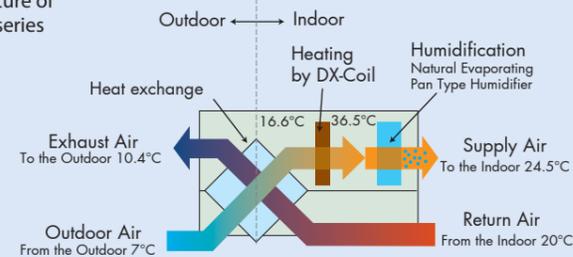

Humidification: 5.4kg/h [VKM100GAMV1]


The Outdoor air is heated from 16.6°C to 36.5°C with DX-coil, Natural Evaporating Pan Type Humidifier is passed and humidification capacity is improved.

DX-Coil: Heat Exchanger which heats or cools the air by VRV outdoor unit's refrigerant.

Efficient outdoor air introduction with heat exchanger and cooling/heating operations

Indoor unit with outdoor air treatment

Using outdoor air, the temperature can be brought near room temperature with minimal cooling capacity through the use of outdoor air.

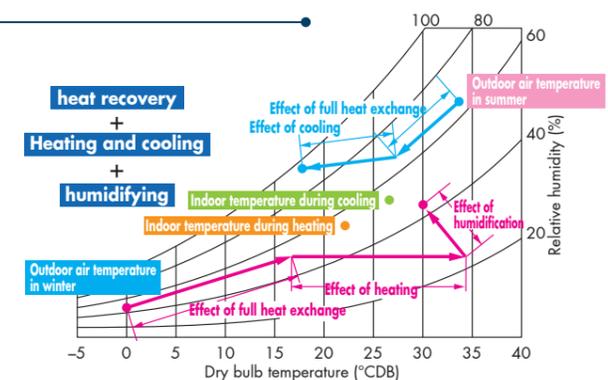

Other features

- Integrated system includes ventilation and humidifying operations.
- Ventilation, cooling/heating and humidifying are possible with one remote controller.

Specifications


MODEL			VKM50GAMV1*	VKM80GAMV1*	VKM100GAMV1*	VKM50GAV1	VKM80GAV1	VKM100GAV1	
Refrigerant			R-410A						
Power Supply			1-phase, 220-240 V, 50 Hz						
Airflow Rate & Static Pressure (Note 7)	Ultra-high	Airflow rate	m ³ /h	500	750	950	500	750	950
		Static pressure	Pa	160	140	110	180	170	150
	High	Airflow rate	m ³ /h	500	750	950	500	750	950
		Static pressure	Pa	120	90	70	150	120	100
	Low	Airflow rate	m ³ /h	440	640	820	440	640	820
		Static pressure	Pa	100	70	60	110	80	70
Power Consumption	Heat exchange mode	Ultra-high	W	560	620	670	560	620	670
		High	W	490	560	570	490	560	570
		Low	W	420	470	480	420	470	480
	Bypass mode	Ultra-high	W	560	620	670	560	620	670
		High	W	490	560	570	490	560	570
		Low	W	420	470	480	420	470	480
Fan Type			Sirocco Fan						
Motor Output			kW						
Sound Level (Note 5) (220/230/240 V)	Heat exchange mode	Ultra-high	dB(A)	37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41
		High	dB(A)	35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39
		Low	dB(A)	32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5
	Bypass mode	Ultra-high	dB(A)	37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41
		High	dB(A)	35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39
		Low	dB(A)	32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5
Humidification Capacity (Note 4)			kg/h						
Temp. Exchange Efficiency	Ultra-high	%	76	78	74	76	78	74	
	High	%	76	78	74	76	78	74	
	Low	%	77.5	79	76.5	77.5	79	76.5	
Enthalpy Exchange Efficiency (Cooling)	Ultra-high	%	64	66	62	64	66	62	
	High	%	64	66	62	64	66	62	
	Low	%	67	68	66	67	68	66	
Enthalpy Exchange Efficiency (Heating)	Ultra-high	%	67	71	65	67	71	65	
	High	%	67	71	65	67	71	65	
	Low	%	69	73	69	69	73	69	
Casing			Galvanised Steel Plate						
Insulating Material			Self-Extinguishable Urethane Foam						
Heat Exchanging System			Air to Air Cross Flow Total Heat (Sensible + Latent Heat) Exchange						
Heat Exchanger Element			Specially Processed Non-flammable Paper						
Air Filter			Multidirectional Fibrous Fleeces						
DX-coil Capacity	Cooling (Note 2)	kW	2.8	4.5	5.6	2.8	4.5	5.6	
	Heating (Note 3)	kW	3.2	5.0	6.4	3.2	5.0	6.4	
Dimensions	Height	mm	387	387	387	387	387	387	
	Width	mm	1,764	1,764	1,764	1,764	1,764	1,764	
	Depth	mm	832	1,214	1,214	832	1,214	1,214	
Connection Duct Diameter			mm						
Machine Weight	Net	kg	102	120	125	96	109	114	
	Gross (Note 8)	kg	107	129	134	—	—	—	
Unit Ambient Condition			°C–40°C DB, 80%RH or less						
			-15°C–40°C DB, 80%RH or less						
			0°C–40°C DB, 80%RH or less						

- Notes:**
- Cooling and heating capacities are based on the following conditions. Fan is based on High and Ultra-high. When calculating the capacity as indoor units, use the following figures: VKM50GAMV1/GV1: 3.5 kW, VKM80GAMV1/GV1: 5.6 kW, VKM100GAMV1/GV1: 7.0 kW
 - Indoor temperature: 27°C DB, 19°C WB, Outdoor temperature: 35°C DB
 - Indoor temperature: 20°C DB, Outdoor temperature: 7°C DB, 6°C WB
 - Humidifying capacity is based on the following conditions: Indoor temperature: 20°C DB, 15°C WB, Outdoor temperature: 7°C DB, 6°C WB
 - The operating sound measured at the point 1.5 m below the centre of the unit is converted to that measured in an anechoic chamber built in accordance with the JIS C 1502 conditions. The actual operating sound varies depending on the surrounding conditions (near running unit's sound, reflected sound and so on) and is normally higher than this value.
 - For operation in a quiet room, it is required to take measures to lower the sound. For details, refer to the Engineering Data.
 - The noise level at the air discharge port is about 8-11 dB(A) or higher than the unit's operating sound. For operation in a quiet room, it is required to take measures to lower the sound.
 - Airflow rate can be changed over to Low mode or High mode.
 - In case of holding full water in humidifier.
 - OA: fresh air from outdoor. RA: return air from room.
 - Specifications, design and information here are subject to change without notice.
 - Power consumption and efficiency depend on the above value of airflow rate.


- Temperature exchange efficiency is the mean value for Cooling and Heating. Efficiency is measured under the following condition: Ratio of rated external static pressure outdoor to indoor is kept constant at 7 to 1.
- In heating operation, freezing of the outdoor unit's coil increases. Heating capability decreases and the system goes into defrost operation. During defrost operation, the fans of the unit continue driving (factory setting). The purpose of this is to maintain the amount of ventilation and humidifying.
- When connecting with a VRV system heat recovery outdoor unit and bringing the RA (exhaust gas intake) of this unit directly in from the ceiling, connect to a BS unit identical to the VRV indoor unit (master unit), and use group-linked operation. (See the Engineering Data for details.)
- When connecting the indoor unit directly to the duct, always use the same system on the indoor unit as with the outdoor unit, perform group-linked operation, and make the direct duct connection settings from the remote controller. (Mode No. "17 (27)" - First code No. "5" - Second code No. "6".) Also, do not connect to the outlet side of the indoor unit. Depending on the fan strength and static pressure, the unit might back up.
- Feed clean water (city water, tap water or equivalent). Dirty water may clog the valve or cause dirt deposits in the water container, resulting in poor humidifier performance. (Never use any cooling tower water and heating-purpose water.)
- Also, if the supply water is hard water, use a water softener because of short life.
- Life of humidifying element is about 3 years (4,000 hours) under the supply water conditions of hardness: 150 mg/L. (Life of humidifying element is about 1 year (1,500 hours) under the supply water conditions of hardness: 400 mg/L.) Annual operating hours: 10 hours/day x 26 days/month x 5 months = 1,300 hours

Dimensions

VKM50/80/100GA(M)V1

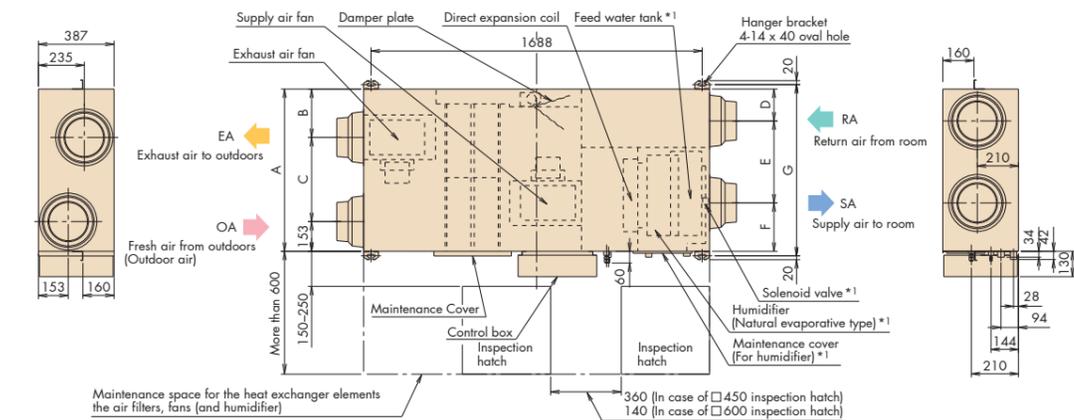

	VKM50GA(M)V1	VKM80/100GA(M)V1
A	832	1,214
B	248	439
C	431	622
D	164	183
E	420	592
F	248	439
G	878	1,262
H	137	89
I	137	89
J	ø196	ø246
K	ø250	ø263

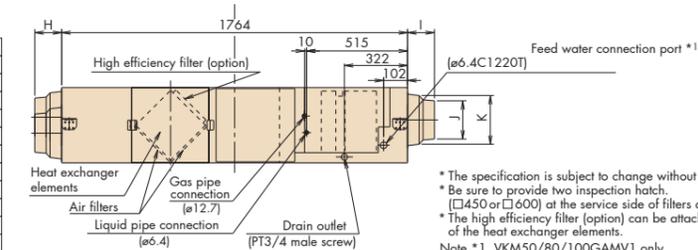

- * The specification is subject to change without notice.
 * Be sure to provide two inspection hatches. (□450 or □600) at the service side of filters and elements.
 * The high efficiency filter (option) can be attached to the SA surface of the heat exchanger elements.
 Note *1. VKM50/80/100GAMV1 only.

Options

Item	Type	VKM50/80/100GA(M)V1
Remote controller		BRC1E62/BRC1C62 *1
Centralised controlling device	Residential central remote controller	DCS303A51 *2
	Central remote controller	DCS302CA61
	Unified ON/OFF controller	DCS301BA61
	Schedule timer	DST301BA61
Controlling device	Wiring adaptor for electrical appendices	KRP2A61
	For humidifier running ON signal output	KRP50-2
	For heater control kit	BRP4A50
R-Board Adaptor	For wiring	Type (indoor unit of VRV)
		FXFQ-S FXFQ-AVM FXZQ-M FXUQ-A FXCQ-M FXKQ-MA FXDQ-PD FXDQ-ND FXMQ-P FXMQ-AR FXHQ-MA FXAQ-P FXLQ-MA FXNQ-MA FXVQ-M
Installation box for adaptor PCB	☆	Notes 2, 3 KRP1H98 Note 4, 6 KRP1BA101 — Notes 2, 3 KRP1B61 — Notes 4, 6 KRP1B56 * KRP1C64 * KRP1B61 KRP1BA54 — KRP1B61 KRP1CA93 Notes 2, 3 KRP4AA93 — —

- Notes:**
- Installation box ☆ is necessary for each adaptor marked ☆.
 - Up to 2 adaptors can be fixed for each installation box.
 - Only one installation box can be installed for each indoor unit.
 - Up to 2 installation boxes can be installed for each indoor unit.
 - Installation box ☆ is necessary for second adaptor.
 - Installation box ☆ is necessary for each adaptor.
 - *1 Necessary when operating a Heat Reclaim Ventilator (VKM) independently. When operating interlocked with other air conditioners, use the remote controllers of the air conditioners.
 - *2 For residential use only. When connected to a Heat Reclaim Ventilator (VKM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

Item	Type	VKM50GA(M)V1	VKM80GA(M)V1	VKM100GA(M)V1
Silencer		—	—	KDDM24B100
	Nominal pipe diameter	mm	—	ø 250
Air suction / Discharge grille	White	K-DGL200B	—	K-DGL250B
	Nominal pipe diameter	mm	ø 200	ø 250
High efficiency filter		KAF242J80M	—	KAF242J100M
Air filter for replacement		KAF241G80M	—	KAF241G100M
Flexible duct (1 m)		K-FDS201D	—	K-FDS251D
Flexible duct (2 m)		K-FDS202D	—	K-FDS252D

Heat Reclaim Ventilator – VAM Series

The Heat Reclaim Ventilator creates a high-quality environment by interlocking with the air conditioner

Model Name

VAM250GJVE, VAM500GJVE, VAM650GJVE, VAM800GJVE, VAM1000GJVE, VAM1500GJVE, VAM2000GJVE


Improved Enthalpy Efficiency¹
Higher External Static Pressure²
Enhanced Energy Saving Functions

This VAM series provides higher Enthalpy Efficiency*1 due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure*2 offers more flexibility of installation. Along with these three outstanding improvement, the night-time free cooling operation contributes to energy conservation and more comfortable space.

¹ For Model: VAM150/250/350/650/800/1000/2000GJVE
² For models: VAM150/250/500GJVE



Heat Reclaim Ventilator remote controller* BRC301B61 (Option)
 This remote controller is used in case of independent operated of Heat Reclaim Ventilator.

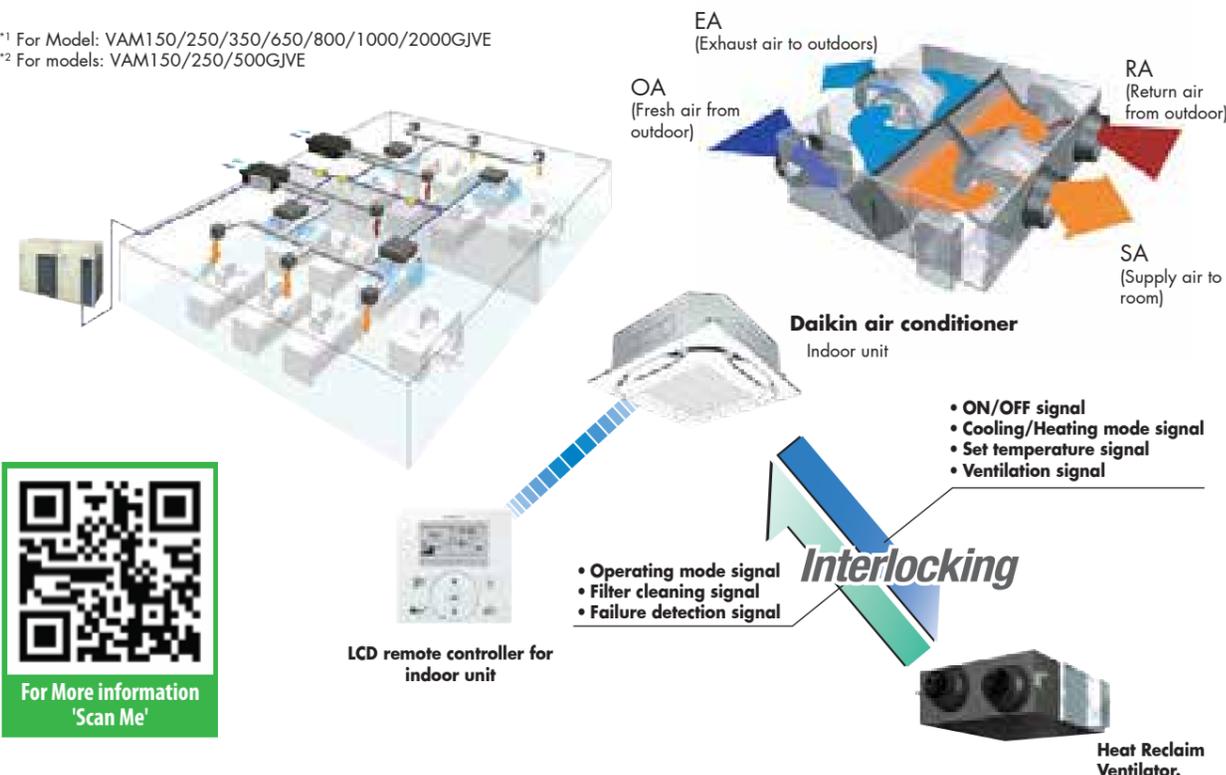

LCD remote controller for indoor unit

Compact Equipment

With a height of just 306mm, the unit easily fits in limited spaces, such as above ceiling.




*For VAM500GJVE

Energy Conservation

Air conditioning load reduced by approximately 31%

Cold Climate Compatible

Standard operation at temperatures down to -15°C.

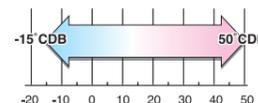

Heat Reclaim Ventilator – VAM Series

Air conditioning load reduced by approximately 31%

Total heat exchange ventilation

This unit recovers heat energy lost through ventilation and curbs room temperature changes caused by ventilation, thereby conserving energy and reducing the load on the air conditioning system.

Enthalpy Efficiency drastically improved by employing thin film element (VAM-GJ model)


Due to thinner film....

- Decreases the moisture resistance of the partition sheets drastically.
- Realises more space for extra layers in the element, resulting in increased effective area that supply and exhaust air can be exposed to.

Moisture absorption increased by approx. 10%

23%

Thickness of the partition sheet
40 μm

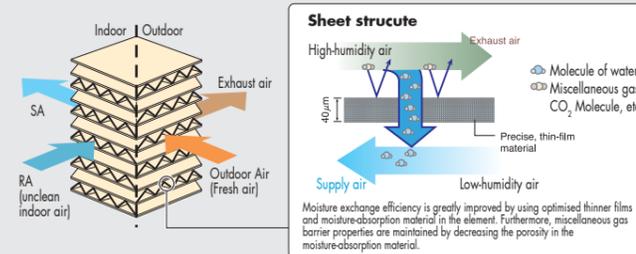

Auto-ventilation Mode Changeover Switching

6%

Automatically switches the ventilation mode (Total heat Exchange Mode/Bypass Mode) according to the operating status of the air conditioner.

Pre-cool, Pre-heat Control


2%

Reduces air conditioning load by not running the Heat Reclaim ventilator while air is still clean soon after the air conditioner is turned ON.

- The air conditioning load reduction value may vary according to weather and other environmental conditions at the location of the machine's installation.
- The air conditioning load reduction values are based on the following conditions:
 Application: Tokyo office building
 Building from: 6 floors above ground, 2 floors underground, floor area 2,100 m²
 Personnel density: 0.25 person/m²
 Ventilation volume: 25 m³/h
 Indoor airconditioning level: summer 25°C 50% RH, intermediate seasons 24°C 50% RH, Winter 22°C 40%RH
 Operating time: 2746 hours (9 hours per day, approx. 25 days per month)
 Calculation method: simulation based on "MICRO-HASP/1982" of the Japan Building Mechanical and Electrical Engineers Association.

Air conditioning Loads Reduced by Approximately

31%

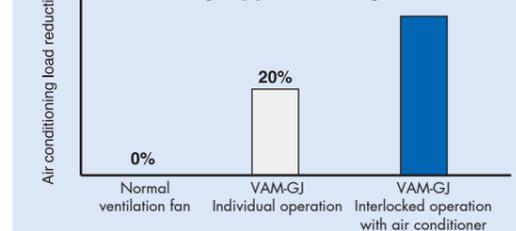


Night-time free cooling operation¹

Night-time free cooling operation is an energy-conserving function that works at night when air conditioners are off. By ventilating rooms containing equipment that raises that room temperature, night-time free cooling operation reduces the cooling load when air conditioners are turned on in the morning. It also alleviated feeling of discomfort in the morning caused by heat accumulated during the night.

Air conditioning sensible heat load reduced by **approx. 5%**²

- Night-time free cooling operation only works to cool and if connected to Building Multi or VRV systems.
- Night-time free cooling operation is set to "off" in the factory setting, so if you wish to use it, request your dealer to turn it on.

¹ This Function can be operated only when interlocked with air conditioners.
² Value is based on the following conditions:
 • Cooling operation performed from April to October.
 • Calculated for air conditioning sensible heat load only (latent heat load not included).

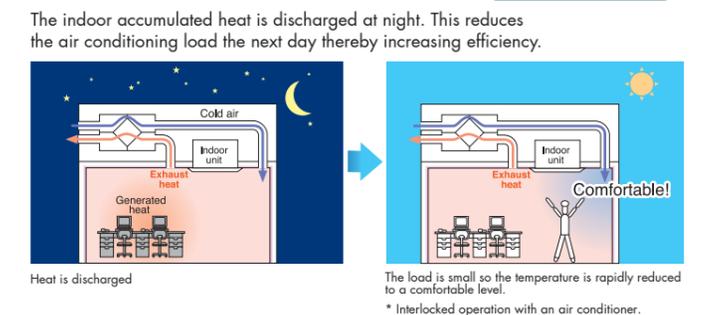


Specifications

MODEL			VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE	
Power Supply			1-phase, 220-240 V/ 220 V, 50 Hz							
Temp. Exchange Efficiency (50/60 Hz)	Ultra-High	%	75/75	74/74	75/75	72/72	78/78	72/72	77/77	
	High	%	75/75	74/74	75/75	72/72	78/78	72/72	77/77	
	Low	%	79/79	80/80.5	77/77.5	74/74.5	80.5/81	75.5/76	79/81	
Enthalpy Exchange Efficiency (50/60 Hz)	For Heating	Ultra-High	71/72	67/67	67.5/67.5	65/65	70/70	65/65	72/72	
		High	71/71	67/67	67.5/67.5	65/65	70/70	65/65	72/72	
		Low	74/74	74/74.5	71.5/72	67.5/68	72.5/73	67/67.5	76/76	
	For Cooling	Ultra-High	63/63	55/55	61/61	61/61	64/64	61/61	62/62	
		High	63/63	55/55	61/61	61/61	64/64	61/61	62/62	
		Low	66/66	59/59.5	64/64.5	64/64.5	68.5/69	64/64.5	66/67	
Power Consumption (50/60 Hz)	Heat Exchange Mode	Ultra-High	137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542	
		High	120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315	
		Low	60/59	128/136	196/207	435/483	476/512	835/927	966/1,039	
	Bypass Mode	Ultra-High	137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542	
		High	120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315	
		Low	60/59	128/136	196/207	435/483	476/512	835/927	966/1,039	
Sound Level (50/60 Hz)	Heat Exchange Mode	Ultra-High	27-29/29	33-35.5/34	34-36/36	39-40.5/39.5	39.5-41.5/39.5	39.5-41.5/41.5	41.5-43.5/42	
		High	26-27.5/28	31.5-34/32	33-34.5/34	37-39.5/37.5	37.5-39.5/37.5	37.5-39.5/39.5	39-43/40	
		Low	21-22/21	25-28.5/24	27.5-29.5/28	35-37.5/34	35-37.5/34.5	35-37.5/36	36-39/39	
	Bypass Mode	Ultra-High	28.5-30.5/30.5	34.5-36/35.5	35-37.5/37.5	40.5-42/41	40.5-42.5/40.5	41-43/42.5	43-45.5/44	
		High	27.5-29/29.5	33-34.5/33.5	33-35.5/35.5	38.5-40/39	38.5-40.5/38.5	39.5-41/41.5	40.5-45/42	
		Low	22.5-23/22.5	25.5-28.5/25.5	27.5-30.5/29.5	36-38.5/35.5	36-38.5/35.5	36.5-38/37.5	37.5-39.5/41	
Casing			Galvanised steel plate							
Insulation Material			Self-extinguishable polyurethane foam							
Dimensions (HxWxD)	mm		278x810x551	306x879x800	338x973x832	387x1,111x832	387x1,111x1,214	785x1,619x832	785x1,619x1,214	
Machine Weigh	kg		24	32	45	55	67	129	157	
Heat Exchange System			Air to air cross flow total heat (Sensible heat + latent heat) exchange							
Heat Exchange Element Material			Specially processed non-flammable paper							
Air Filter			Multidirectional fibrous fleeces							
Fan	Type		Sirocco fan							
	Airflow Rate (50/60 Hz)	Ultra-High	m ³ /h	250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000
		High	m ³ /h	250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000
		Low	m ³ /h	155/155	320/295	500/470	700/670	860/840	1,320/1,260	1,720/1,580
	External Static Pressure (50/60 Hz)	Ultra-High	Pa	70/96	105/150	85/125	133/170	168/192	112/150	116/140
		High	Pa	54.65	66/52	53/67	92/85	110/86	73/72	58/32
Low		Pa	24/20	32/18	35/38	72/61	85/60	56/50	45/45	
Motor Output	kW		0.030X2	0.090X2	0.140X2	0.280X2	0.280X2	0.280X4	0.280X4	
Connection Duct Diameter	mm		ø150	ø200	ø250	ø250	ø350	ø350	ø350	
Unit ambient condition			-15°C~50°CDB, 80%RH or less							

- Notes:**
- Sound level is measured at 1.5m below the centre of the body.
 - Airflow rate can be changed over to Low mode or High mode.
 - Sound level is measured in an anechoic chamber.
 - Sound level generally becomes greater than this value depending on the operating conditions, reflected sound and peripheral noise.
 - The sound level at the air discharge part is about 8 dB(A) higher than the unit's sound level.
 - The specifications, designs and information given here are subject to change without notice.
 - Temperature Exchange Efficiency is the mean value between cooling and heating.
 - Efficiency is measured under the following conditions:
Ratio of rated external static pressure has been maintained as follows; outdoor side to indoor side = 7 to 1.
 - In conformance with JIS standards (JIS B 8628), operating sound level is based on the value when one unit is operated, with the value converted for an anechoic chamber.
This is transmission sound from the main unit, and does not include sound from the discharge grille. Thus it is normal for the sound to be louder than the indicated value when the unit is actually installed.
 - Sound level from the discharge part causes the value to be approximately 8 dB(A) (models with the airflow rate of less than 150 to 500m³/h) to approximately 11 dB(A) (models with the airflow rate of 650m³/h or more) greater than the indicated value. Furthermore, fan rotation and noise from the discharge grille may increase depending on the on-site duct resistance conditions. Please consider noise countermeasures when installing the unit.

- With large models in particular (1500 and 2000m³/h models), if the supply air (SA) grille is installed near the main unit, the noise of the main unit may be heard from the discharge grille via the duct, and this will result in a marked increase in noise. In such cases, if peripheral effects are included (such as reverberation of the floor and walls, combination with other equipment, and background noise), sound level may be as much as 15 dB(A) higher than the indicated value. When installing a large model, please provide as much separation as possible between the main unit and the discharge grille. If the equipment and discharge grille are near each other, please consider countermeasures such as the following:
 - Use a sound-muffling box, flexible duct and sound-muffling air supply/discharge grilles
 - Decentralised installation of discharge grilles
- When installing in a location with particularly low background noise such as a classroom, please consider the following measures to avoid transmission sound from the main unit:
 - Use of ceiling materials with high sound insulating properties (high transmission loss).
 - Methods of blocking sound transmission, for example, by adding sound insulating materials around the bottom of the sound source.
 Alternatively, consider supplementary methods such as installing the equipment in a different location (corridor, etc.)

Options

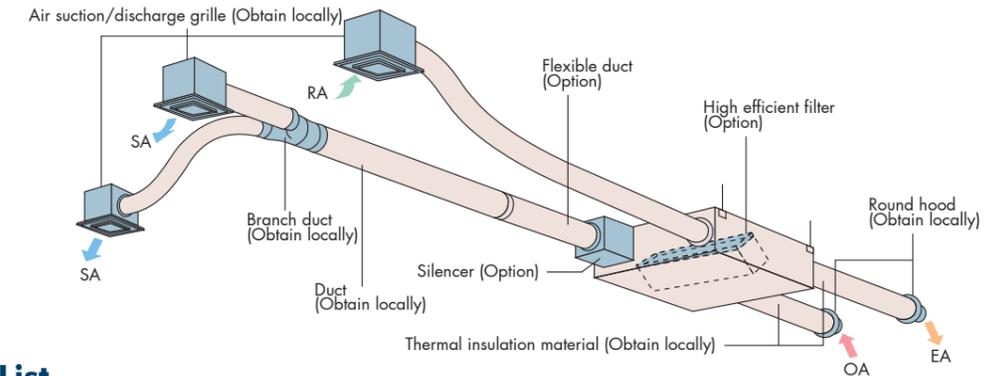

Option List


Item	Type	VAM 250 • 500 • 650 • 800 • 1000 • 1500 • 2000 GJVE															
Controlling device	Heat Reclaim Ventilator remote controller	BRC301B61															
	Centralised controlling device	Residential central remote controller	DCS303A51 *1														
		Central remote controller	DCS302CA61														
		Unified ON/OFF controller	DCS301BA61														
		Schedule timer	DST301BA61														
PC Board Adaptor	Wiring adaptor for electrical appendices	KRP2A61															
	For humidifier	KRP50-2															
	Installation box for adaptor PCB	KRP50-2A90 (Mounted electric component assy of Heat Reclaim Ventilator)															
	For heater control kit	BRP4A50															
	For wiring	Type (indoor unit of VRV)	FXFQ-S	FXFQ-LU	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PB	FXDQ-NB	FXMQ-P	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA	FXVQ-MA	FXVQ-M
			KRP1C63*	KRP1BA57*	KRP1C67	KRP1B61*	KRP1B61	KRP1B56*	KRP1C64*	KRP1B61	KRP1BA54	—	KRP1B61	KRP1C67	—	—	
			Notes 2, 3	Note 4, 6	—	Notes 2, 3	—	Notes 4, 6	Notes 2, 3	—	Note 3	Notes 2, 3	Notes 2, 3	—	—	—	
			KRP1H98	KRP1BA101	—	KRP1B96	—	KRP1BA101	KRP4A96	—	KRP1CA93	KRP4AA93	—	—	—	—	
			—	—	—	—	—	—	—	—	—	—	—	—	—	—	
			—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Installation box for adaptor PCB	☆	—															

- Notes:**
- Installation box ☆ is necessary for each adaptor marked ☆.
 - Up to 2 adaptors can be fixed for each installation box.
 - Only one installation box can be installed for each indoor unit.
 - Up to 2 installation boxes can be installed for each indoor unit.
 - Installation box ☆ is necessary for second adaptor.
 - Installation box ☆ is necessary for each adaptor.
 - *1 For residential use only. When connected with a Heat Reclaim Ventilator (VAM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

Item	Type	VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE
Additional function	Silencer	—	KDDM24B50	—	KDDM24B100	—	—	KDDM24B100X2
	Nominal pipe diameter/mm	—	—	ø200	—	ø250	—	—
	High efficiency filter	KAF242J25M	KAF242J50M	KAF242J65M	KAF242J80M	KAF242J100M	KAF242J80MX2	KAF242J100MX2
Air filter for replacement	KAF241J25M	KAF241J50M	KAF241J65M	KAF241J80M	KAF241J100M	KAF241J80MX2	KAF241J100MX2	
Flexible duct (1 m)	K-FDS151D	—	K-FDS201D	—	—	K-FDS251D	—	
Flexible duct (2 m)	K-FDS152D	—	K-FDS202D	—	—	K-FDS252D	—	
Duct adaptor	Nominal pipe diameter/mm	—	—	—	—	—	YDFA25A1	ø250

PC board adaptor for heater control kit (BRP4A50)

When the installation of an electric heater is required in a cold region, this adaptor with an internal timer function eliminates the complicated timer connecting work that was necessary with conventional heaters.

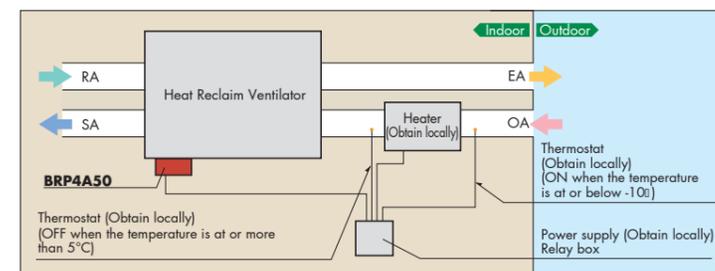

- Notes when installing**
- Examine fully an installation place and specification for using the electric heater based on the standard and regulation of each country.
 - Supply the electric heater and safety production devices such as a relay and a thermostat, etc. of which qualities satisfy the standard and regulation of each country at site.
 - Use a non-flammable connecting duct to the electric heater. Be sure to allow 2 m or more between the electric heater and the Heat Reclaim Ventilator for safety.
 - For the Heat Reclaim Ventilator, use a different power supply from that of the electric heater and install a circuit breaker for each.

Note • Ask an authorised Daikin dealer to install Daikin products. Do not try to install the product yourself or get it installed by any unauthorised dealer. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion. Warranty of the product shall be void if not installed by an authorised Daikin dealer.

- Use only those parts and accessories supplied or specified by Daikin. Ask authorised Daikin dealer for any repair or component. Warranty of the product / component shall be void if non-specified spares are used or repaired by a non Daikin dealer.
- Please ensure to install ELCB (Earth Leakage Circuit Breaker) for outdoor units to prevent ground fault effects.
- Read the user's manual carefully before using the product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

For any enquiry, either call the numbers mentioned below or contact your nearest Daikin dealer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.



JMI-0107



JQA-1452

About ISO 9001

ISO 9001 is a plant certification system defined by the International Organization for Standardization (ISO) relating to quality assurance. ISO 9001 certification covers quality assurance aspects related to the "design, development, manufacture, installation, and supplementary service" of products manufactured at the plant.



EC99J2044

About ISO 14001

ISO 14001 is the standard defined by the International Organization for Standardization (ISO) relating to environmental management systems. Our group has been acknowledged by an internationally accredited compliance organisation as having an appropriate programme of environmental protection procedures and activities to meet the requirements of ISO 14001.

DAIKIN AIRCONDITIONING INDIA PVT. LTD.

12th Floor, Building No. 9, Tower A, DLF Cyber City, DLF Phase III, Gurgaon - 122 002, Haryana, India.
Tel.: 0124-4555444, Fax.: 0124-4555333, e-mail: ho@daikinindia.com



CUSTOMER CONTACT CENTRE:

011-40319300, 1860-180-3900
cs@daikinindia.com

SALES & SERVICE OFFICES

Ahmedabad - Tel: 079-26583013/14
Bengaluru - Tel: 080-25590452/54
Bhubaneshwar - Tel: 0674-2546476
Chandigarh - Tel: 0172-5089862/64
Chennai - Tel: 044-40807676
Cochin - Tel: 0484-2808646
Delhi NCR - Tel: 011-43834400/4500
Ghaziabad - Tel: 0120-4205851
Indore - Tel: 0731-4005864
Jaipur - Tel: 0141-2218903

Kolkata - Tel: 033-23574259/61
Lucknow - Tel: 0522-2787307/340
Ludhiana - Tel: 0161-5077028/29/30
Mumbai - Tel: 022-30926666
Patna - Tel: 0612-2522477
Pune - Tel: 020-25560300
Raipur - Tel: 0747-1115412
Ranchi - Tel: 0763-5093703
Secunderabad - Tel: 040-49134283
Vijaywada - Tel: 0866-2952224/25/26

To know more, give a missed call or SMS:
<DAIKIN> to 9210188999

Visit us at: www.daikinindia.com

Follow us on:

www.facebook.com/daikinindia

www.twitter.com/daikinindia

For more product information:



For More information
'Scan Me'

- The specifications, designs, and information in this brochure are subject to change without notice.