


FFF SERIES

Cooling Only



Quiet, décor-blending form and easy installation in new or old buildings.

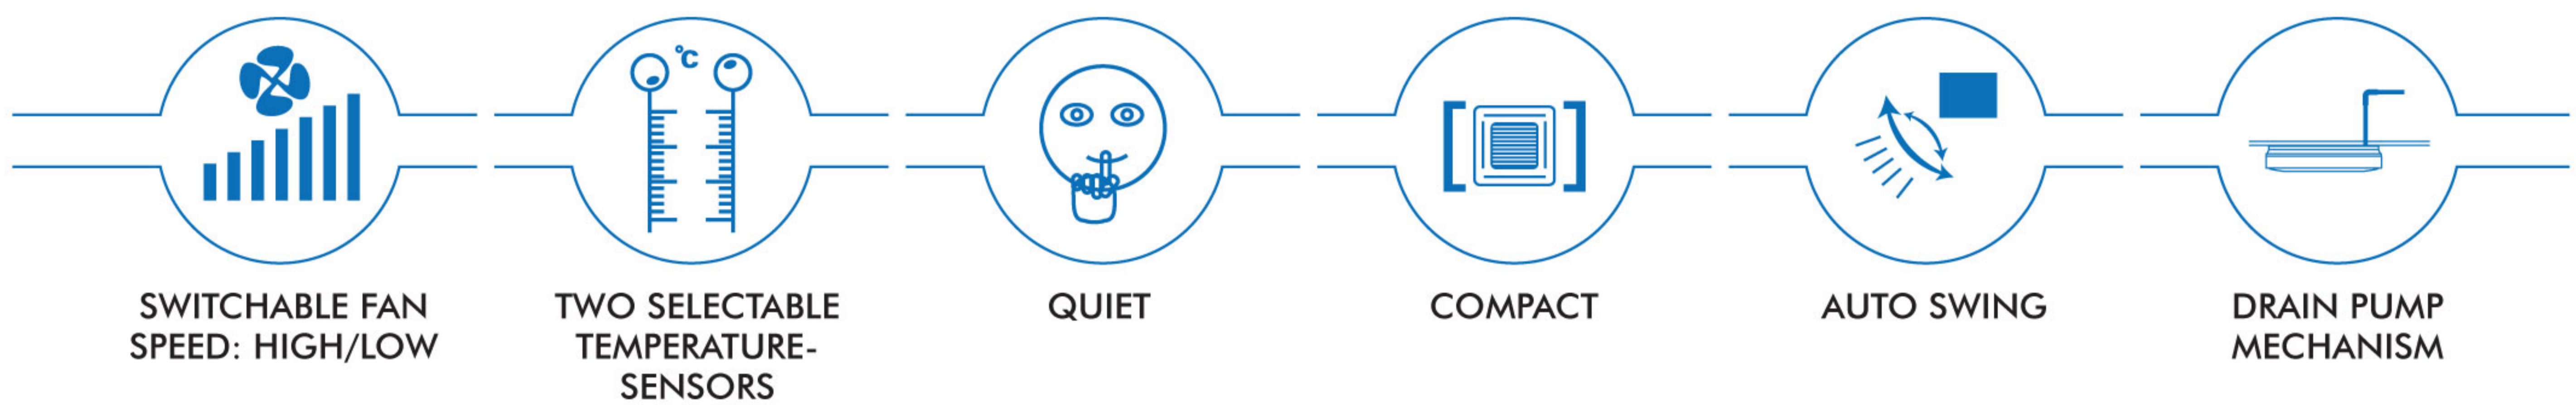


FFF50B & 60B

5.0 kW ~ 6.0 kW

(Cooling only)

ACCESSORY REQUIRED FOR INDOOR UNIT

NAVIGATION REMOTE CONTROLLER (Wired Remote Controller)

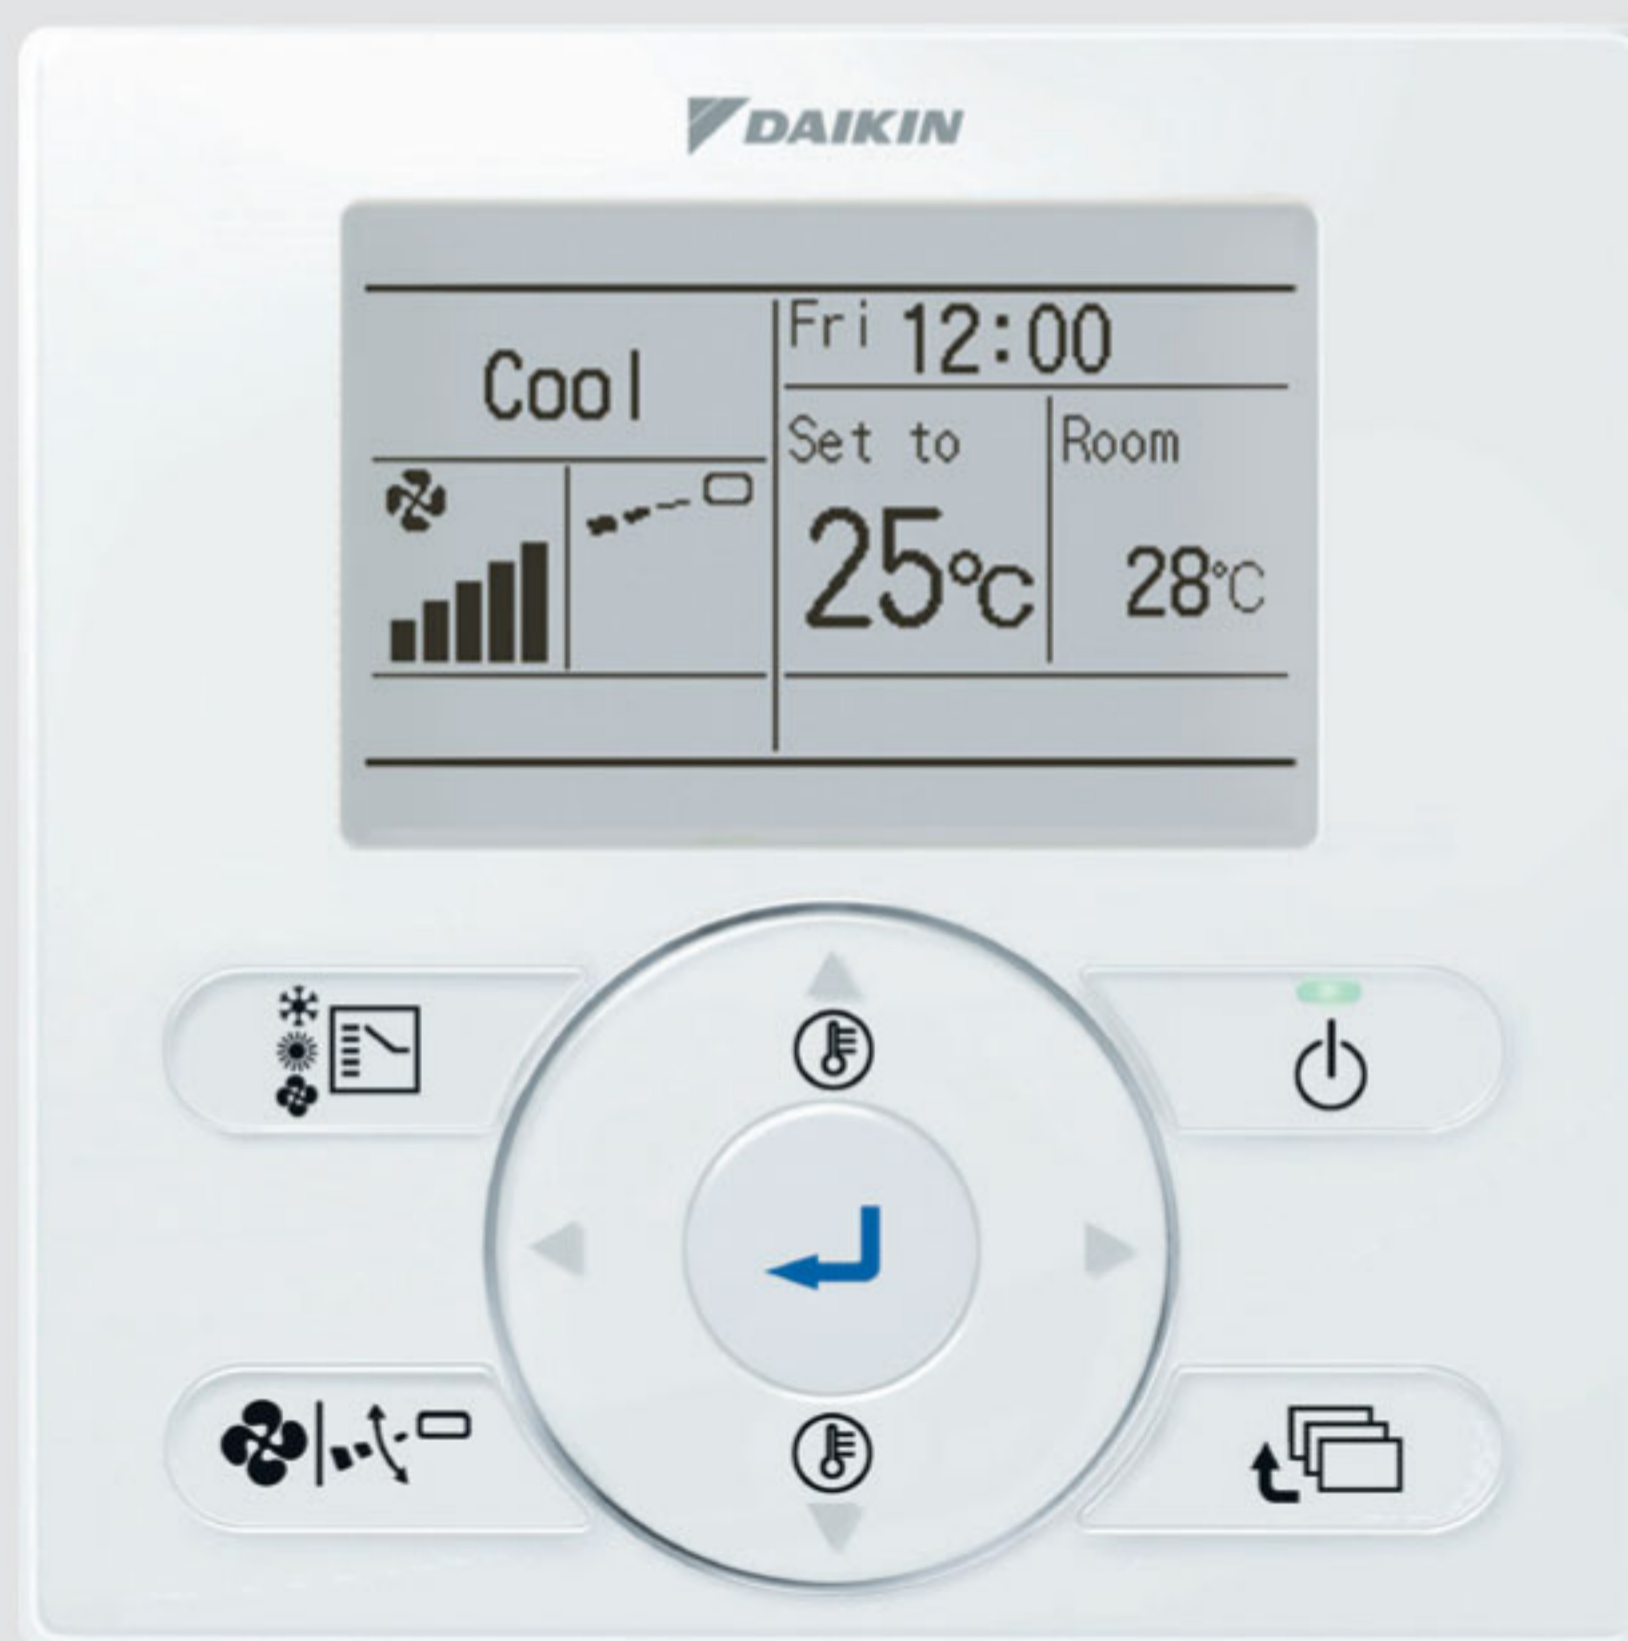

NEW

BRC1E62

Note: Remote controller cable is not included and must be obtained locally.

WIRELESS LCD REMOTE CONTROLLER

A signal receiver must be added to the indoor unit.



BRC4M150W16

NEW



Signal receiver unit
(Installed type)

Wireless remote controller and signal receiver are sold as separate accessories.



BRC7M630W-6

SPECIFICATIONS

Compact Multi Flow Ceiling Mounted Cassette Type (Cooling Only)



R-32

Model name		Indoor unit		FFF50BV16		FFF60BV16			
		Outdoor unit		RZCF50BRV16		RZCF60BRV16			
Remote	Wireless	Optional		BRC4M150W16					
	Signal Receiver Unit - Model Number		BRC7M630W-6						
	Wired	Optional		BRC1E62					
Panel Code	Model Number		BYFQ60B3W1						
Power supply				1 Phase, 230 V, 50 Hz		1 Phase, 230 V, 50 Hz			
Cooling capacity -Rated (min ~max)		kW		5.0 (3.2 ~ 5.6)		6.0 (3.2 ~ 6.0)			
Power consumption	Cooling-Rated	kW		1.690		1.990			
Annual Power Consumption		kWh		1005		1207			
ISEER / Stars		Wh/Wh		3.85/3 Star		3.85/3 Star			
Indoor unit	Color		Fresh White						
	Airflow rate (H/HM/M/ML/L)		m ³ /min	15/10		15/10			
			cfm	529/353		529/353			
	Sound level (H/HM/M/ML/L)		dB(A)		41/32		41/32		
	Dimensions (HXWxD)		Unit	mm		260x575x575			
			Panel	mm		55x700x700			
	Machine weight		Unit	kg		17.5			
Panel			kg		2.7				
Certified operation range		°CWB		14 to 28		14 to 28			
Outdoor unit	Color		Ivory white						
	Compressor		Type	Hermetically sealed swing type		Hermetically sealed swing type			
			Motor output	kW		1.3			
	Refrigerant charge (R-32)		kg		1.09 (Charged for 15 m)		1.30 (Charged for 15 m)		
	Sound level		Cooling	dB(A)		48		50	
	Dimensions (H x W x D)		mm		595x845x300		595x845x300		
	Machine Weight		kg		36.5		40		
Certified operating range		°CDB		21 to 46		21 to 46			
Piping connections	Liquid (Flare)		mm		Φ9.52		Φ9.52		
	Gas (Flare)		mm		Φ15.88		Φ15.88		
	Drain		mm		Φ18.0 (Hole)		Φ18.0 (Hole)		
Max. inter unit piping length		m		30		30			
Max. installation level difference		m		20		20			

Note :

1. Rated cooling capacities are based on the following conditions: Indoor temp., 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB. Equiv. refrigeration piping, 7.5 m (horizontal).
2. Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.